

Project Name:	Type:
Part Number:	Date:



GREENCREATIVE

T8 UEB (UL Type B - Single and Double Ended Bypass)

FEATURES

- Replace 2', 3', and 4' T8 fluorescent lamps
- Integral LED driver - Directly operate on 120-277V line voltage
- UEB - Universal ended installation in bypass mode. Suitable for both single ended installation working with non-shunted lamp holders only, or double ended installation working with both shunted or non-shunted lamp holders
- Frosted glass tube optimizes light distribution
- Options of PET coated glass tube improving resistance to breakage (10T8/4F/xxx/UEB/C models)
- Built-in safety switch prevents electrical shock during installation
- Exceptional efficacy up to 170 LPW
- Lumen output up to 2,200lm for 4' models
- Options of 3000K, 3500K, 4000K, and 5000K
- L70 rated lifetime up to 60,000 hours
- 5 year limited warranty* / Optional 10 year available (see EXTENDED WARRANTIES table for information)
- Suitable for use in totally enclosed fixtures and damp locations
- Fixture operating temperature: -4°F to 95°F (-20°C to 35°C)
- Lamp ambient temperature: -4°F to 113°F (-20°C to 45°C)
- NSF (National Sanitation Foundation) certified for Food Zone (Non-Contact), Splash, and Non-Food Zones



072023



SPECIFICATIONS

Product	Model	Nominal Length	Equiv.	Input Voltage	Wattage	Lumens	CCT	Efficacy (LPW)	Life (hrs)	CRI	Power Factor	THD	Beam Angle	Fixture Rating	PET Coated	DLC / NSF
37394	8.5T8/2F/830/UEB	2'	17W	120-277V	8.5	1,050	3000K	124	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37395	8.5T8/2F/835/UEB	2'	17W	120-277V	8.5	1,050	3500K	124	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37396	8.5T8/2F/840/UEB	2'	17W	120-277V	8.5	1,100	4000K	129	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37397	8.5T8/2F/850/UEB	2'	17W	120-277V	8.5	1,100	5000K	129	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37398	12T8/3F/830/UEB	3'	25W	120-277V	12	1,400	3000K	117	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37399	12T8/3F/835/UEB	3'	25W	120-277V	12	1,400	3500K	117	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37400	12T8/3F/840/UEB	3'	25W	120-277V	12	1,450	4000K	121	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37401	10T8/4F/830/UEB	4'	32W	120-277V	10	1,650	3000K	165	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37402	10T8/4F/835/UEB	4'	32W	120-277V	10	1,650	3500K	165	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37403	10T8/4F/840/UEB	4'	32W	120-277V	10	1,700	4000K	170	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37404	10T8/4F/850/UEB	4'	32W	120-277V	10	1,700	5000K	170	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37405	10T8/4F/840/UEB/C	4'	32W	120-277V	10	1,700	4000K	170	60,000	82	0.9	<20%	180°	Enclosed	Yes	√ / √
37406	10T8/4F/850/UEB/C	4'	32W	120-277V	10	1,700	5000K	170	60,000	82	0.9	<20%	180°	Enclosed	Yes	√ / √
37407	14T8/4F/835/UEB	4'	32W	120-277V	14	2,100	3500K	150	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37408	14T8/4F/840/UEB	4'	32W	120-277V	14	2,200	4000K	157	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √
37409	14T8/4F/850/UEB	4'	32W	120-277V	14	2,200	5000K	157	60,000	82	0.9	<20%	220°	Enclosed	No	√ / √

* Please visit www.greencreative.com for Limited Warranty terms.

DIMENSION & WEIGHT



Model	Base	MOL	Dia.	Weight
8.5T8/2F/8xx/UEB	G13	23-3/16"	1.0"	0.24 lb
12T8/3F/8xx/UEB	G13	35-3/16"	1.0"	0.33 lb
10T8/4F/8xx/UEB	G13	47-3/16"	1.0"	0.45 lb
10T8/4F/8xx/UEB/C	G13	47-3/16"	1.0"	0.47 lb
14T8/4F/8xx/UEB	G13	47-3/16"	1.0"	0.45 lb

xx - Refers to the CCT




T8 UEB (UL Type B - Single and Double Ended Bypass)

INSTALLATION



SINGLE ENDED BYPASS INSTALLATION

Suitable for use with Non-Shunted lamp holders only.


Programmed Start or Rapid Start
(Non-Shunted Lamp Holders)





Instant Start
(Shunted Lamp Holders)



Step 1. Cut all wires connected to the existing ballast, and remove the ballast.



Step 2. Connect power to one end (the end with L and N markings) according to the diagram. Wiring should be made using Non-Shunted lamp holders only.

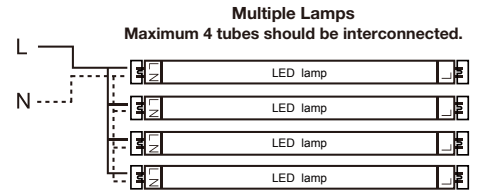


DOUBLE ENDED BYPASS INSTALLATION

Suitable for use with both Non-Shunted or Shunted lamp holders.



Programmed Start or Rapid Start
(Non-Shunted Lamp Holders)




Step 1. Cut all wires connected to the existing ballast, and remove the ballast.



Step 2. For Non-Shunted lamp holders, connect power to both ends according to the diagram.

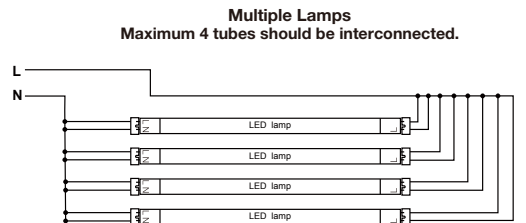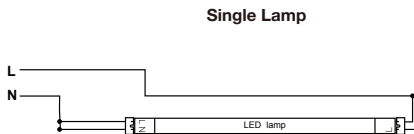


Instant Start
(Shunted Lamp Holders)





Or



Step 1. Cut all wires connected to the existing ballast, and remove the ballast.



Step 2. For Shunted lamp holders, connect power to both ends according to the diagram.

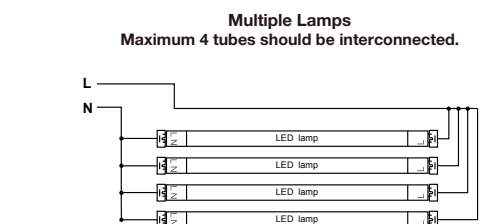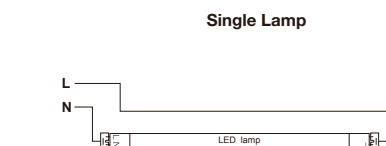



T8 UEB (UL Type B - Single and Double Ended Bypass)

ORDERING INFORMATION

Mode	Master Carton			Shipping Carton		
	Case Qty	Case Dimensions (LxWxH)	Case Weight	Case Qty	Case Dimensions (LxWxH)	Case Weight
8.5T8/2F/8xx/UEB	N.A.	N.A.	N.A.	25PCS	25-9/16" x 5-15/16" x 5-15/16"	7.6 lb
12T8/3F/8xx/UEB	N.A.	N.A.	N.A.	25PCS	37-3/8" x 5-15/16" x 5-15/16"	10.6 lb
10T8/4F/8xx/UEB	N.A.	N.A.	N.A.	25PCS	49-3/16" x 5-15/16" x 5-15/16"	13.2 lb
10T8/4F/8xx/UEB/C	N.A.	N.A.	N.A.	25PCS	49-3/16" x 5-15/16" x 5-15/16"	13.2 lb
14T8/4F/8xx/UEB	N.A.	N.A.	N.A.	25PCS	49-3/16" x 5-15/16" x 5-15/16"	13.2 lb

xx - Refers to the CCT

ACCESSORY ORDERING INFORMATION

Product	Model	Description	Pictures	Dimensions
34958	5EMDRIVER**	5W Emergency LED Driver		
34959	10EMDRIVER	California Title 20 Compliant 10W Emergency LED Driver		
58012	35EMINVERTER	California Title 20 Compliant 35W Emergency LED Driver (Field Installation)		
58013	35EMINVERTER/CEC	California Title 20 Compliant 35W Emergency Inverter (Field Installation)		
98003	23EMDRIVER	California Title 20 Compliant 23W Emergency LED Driver (Field Installation)		

** Does not meet Title 20 appliance requirements, not for use in California



T8 UEB (UL Type B - Single and Double Ended Bypass)

EXTENDED WARRANTIES***

Model	Description****
8.5T8/2F/8xx/UEB/10YEARWARRANTY	10 Year warranty for 8.5T8/2F/8xx/UEB/yy
12T8/3F/8xx/UEB/10YEARWARRANTY	10 Year warranty for 12T8/3F/8xx/UEB/yy
10T8/4F/8xx/UEB/10YEARWARRANTY	10 Year warranty for 10T8/4F/8xx/UEB/yy
10T8/4F/8xx/UEB/C/10YEARWARRANTY	10 Year warranty for 10T8/4F/8xx/UEB/C/yy
14T8/4F/8xx/UEB/10YEARWARRANTY	10 Year warranty for 14T8/4F/8xx/UEB/yy

*** Warranty based on a maximum of 4,368 annual operating hours (per year for ten years) and exposure to a maximum fixture operating temperature of 80°F / 27°C.

**** xx – Refers to the CCT yy – Refers to model generations within the same nominal performance. Typically blank, 'R', or 'RC'

CERTIFICATION INFORMATION

Product	Model	DLC ID#
37394	8.5T8/2F/830/UEB	S-7NS4YL
37395	8.5T8/2F/835/UEB	S-2H37RP
37396	8.5T8/2F/840/UEB	S-N5F8PW
37397	8.5T8/2F/850/UEB	S-3HJAVZ
37398	12T8/3F/830/UEB	S-7T8HV2
37399	12T8/3F/835/UEB	S-PY9HTI
37400	12T8/3F/840/UEB	S-D1JQSU
37401	10T8/4F/830/UEB	S-N2LFKT
37402	10T8/4F/835/UEB	S-9U4L0Y
37403	10T8/4F/840/UEB	S-0TVDM7
37404	10T8/4F/850/UEB	S-7VS0QT
37405	10T8/4F/840/UEB/C	S-JBTCRA
37406	10T8/4F/850/UEB/C	S-GFAOZ7
37407	14T8/4F/835/UEB	S-6W95MD
37408	14T8/4F/840/UEB	S-F1XLSR
37409	14T8/4F/850/UEB	S-6S0XFY

Note: All rights reserved. All sizes and specifications are subject to change at any time without notice.