

Project Name:	Part Number:	Type:
---------------	--------------	-------

# VAPOR TIGHT HIGH BAY RETROFIT KIT

## HIGH BAY



### FEATURES

- Easy Upgrade to LED
- Installs In Less Than 5 Mins.
- Reduce Power Consumption By 50%
- Durable Aluminum 1 Piece Kit
- Universal Voltage Driver
- Clear Acrylic, Frosted Acrylic, Or Polycarbonate Lens Options
- 0-10V Dimmable Driver (100%-10%)
- 5 Year Warranty
- ETL Listed
- DesignLights Consortium\* Premium Qualified Luminaire



### SUITABLE APPLICATIONS

- ILP Blizzard Series
- Lithonia FHE Series
- Cooper VT4 Series
- Columbia XEW4 Series
- Philips DayBrite CFI Series

### REPLACES

3T5HO/4T8, 4T5HO/6T8, 6T5HO

LED SYSTEMS INFO	80W	80W FRAL	120W	120W FRAL	160W	160W FRAL
Calculated L <sub>70</sub> (TM-21)	>100K	>100K	>100K	>100K	>100K	>100K
Delivered Lumens	12,884 lm	12,652 lm	16,500 lm	16,110 lm	23,110 lm	22,640 lm
Total Input Watts	84 W	84 W	116 W	117 W	160 W	160 W
Luminaire Efficacy Rating (LER)	154 lm/W	151 lm/W	142 lm/W	138 lm/W	144 lm/W	141 lm/W
Correlated Color Temperature (CCT)	5000K	5000K	5000K	5000K	5000K	5000K
Color Rendering Index (CRI)	>80	>80	>80	>80	>80	>80
Ambient Temperature Range	-40°F-130°F	-40°F-130°F	-40°F-130°F	-40°F-130°F	-40°F-125°F	-40°F-125°F
Universal Driver	120-277 V	120-277 V	120-277 V	120-277 V	120-277 V	120-277 V

LED System data above based on BLR-80WLED-UNIV-50, BLR-80WLED-UNIV-50-FRAL, BLR-120WLED-UNIV-50, BLR-120WLED-UNIV-50-FRAL, BLR-160WLED-UNIV-50, & BLR-160WLED-UNIV-50-FRAL  
LED Lumen maintenance estimates based on TM-21 projections for the light source at 25°C ambient.

### ORDERING GUIDE:

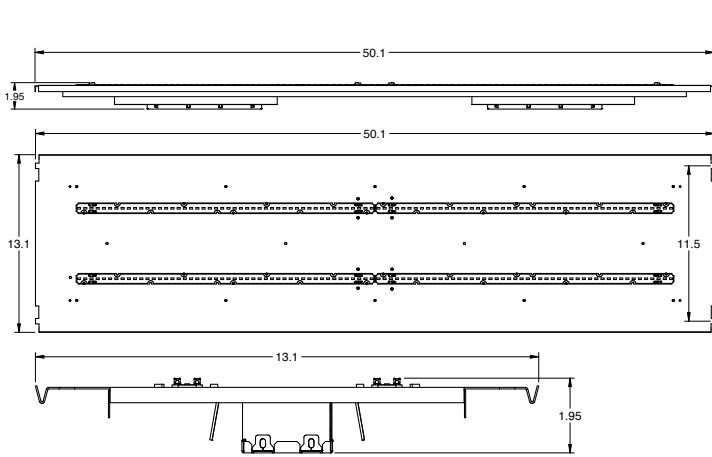
Series	Watts	Driver	Color	Options
BLR High Bay Retrofit	<b>80WLED</b>	UNIV 120-277V Driver	<b>50</b>	<b>CAL</b> Clear Acrylic Lens
	<b>120WLED</b>		<b>40</b>	<b>FRAL</b> Frosted Acrylic Lens
	<b>160WLED</b>		<b>35</b>	<b>PCL*</b> Clear Polycarbonate Lens .125"
			<b>30</b>	<b>WLOS</b> Wet Location Sensor
				<b>USB</b> User Select Bi-level Dim w/ Occ. Sensor
				<b>BDxx</b> Preset Bi-level Dim Sensor (xx=% eg. 20,30)
				<b>BDxxPC</b> Preset Bi-level Dim Sensor w/ Photocell
				<b>EM5</b> 5W LED Factory Installed Battery Backup
				<b>EM7</b> 7W LED Factory Installed Battery Backup
				<b>EM10</b> 10W LED Factory Installed Battery Backup
				<b>EM12</b> 12W LED Factory Installed Battery Backup
				<b>LEDBBCT</b> -4°F Cold Temperature Battery Backup

\*DLC Premium Listed Product, Not all versions of this product may be DLC Premium qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.


# VAPOR TIGHT HIGH BAY RETROFIT KIT

## HIGH BAY

### LINE DRAWINGS











80W & 120W

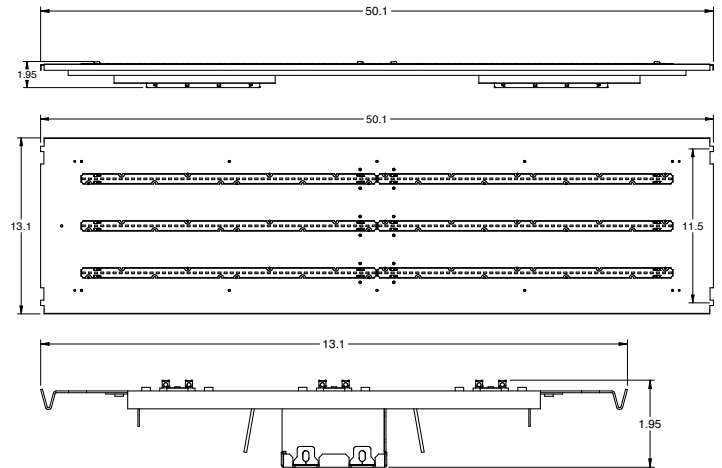

160W

### INSTALLATION INSTRUCTIONS

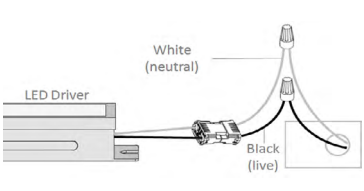 <p>1 Shut off or disconnect power to fixture.</p>	 <p>2 Unhinge latches and remove the lens.</p>
 <p>3 Disconnect ballast and remove gear tray from fixture.</p>	 <p>4 Clip in Vapor Tight Retrofit Kit to two of the retainer clips.</p>
 <p>5 Connect the Retrofit Kit to AC power and ground.</p>	 <p>6 Rotate Vapor Tight Retrofit Kit up into the two remaining retainer clips.</p>
 <p>7 Reattach the lens to the fixture.</p>	 <p>8 Turn on or reconnect power to the fixture to complete the installation.</p>

# VAPOR TIGHT HIGH BAY RETROFIT KIT

## HIGH BAY

### PHOTOMETRIC REPORTS

Photometric values based upon tests performed in compliance with LM-79. IES files can be downloaded at [www.ilp-inc.com](http://www.ilp-inc.com)

