

ARTNET DMX

Art-Net™ DMX Bidirectional Converter

The Art-Net™ DMX Bidirectional Converter is an Ethernet to DMX adapter with integrated optical DMX splitter and Ethernet switch capability. It can be remotely configured and monitored through Art-Net™ supported PC software including Sunlite, DMX workshop, Luminair, Madrix, etc.

- Includes Control4® Simple Device Discovery Protocol (SDDP)
- Supports the latest Art-Net™ 4 Protocol
- Compatible with DMX512, DMX512-A, and Art-Net™
- 2x Ethernet ports and 4x RJ45 DMX ports
- Supports up to 4x Art-Net™ universes
- 3.5" LCD screen with touch control pen
- Recorder function and SD Card memory option
- PlayBack function under standalone mode
- TaskManager function to create schedules and operate under standalone mode



ARTNET DMX GATEWAY QUICK SPECS

VOLTAGE	12V/24V DC
MOUNTING	Surface mount
PROTOCOL	DMX512, DMX512-A, and Art-Net™
OPERATING TEMP	-20°C (-4°F) to 50°C (122°F)
CERTIFICATIONS	FCC Compliant, Dry Locations


PROJECT:
TYPE:
LOCATION:
CATALOG NUMBER:






ARTNET DMX GATEWAY ORDERING INFORMATION

ITEM NUMBER	DESCRIPTION	FINISH	VOLTAGE	DIMMING
ARTNET-DMX-GTWY	Art-Net™ DMX Gateway	Black	12/24V DC	Non-Dimmable

ARTNET DMX GATEWAY QUICK DIMENSIONS

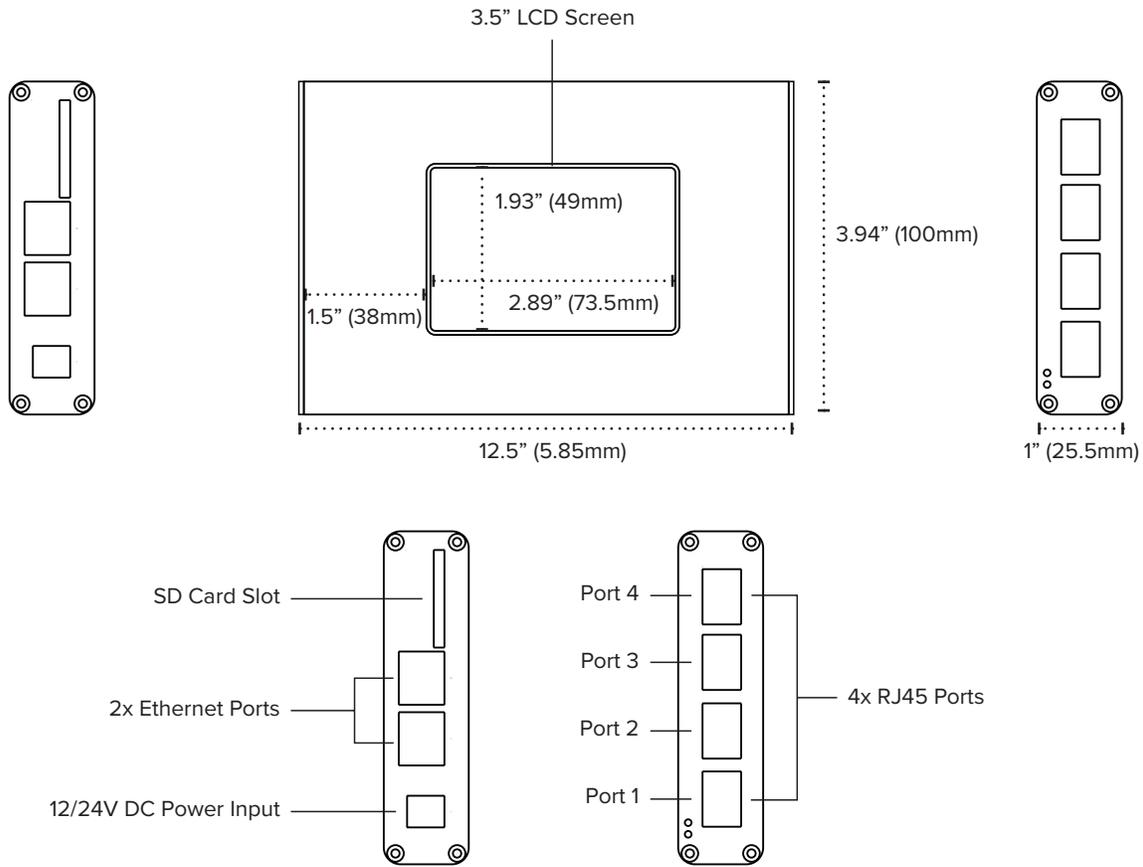

ARTNET DMX GATEWAY QUICK SETUP

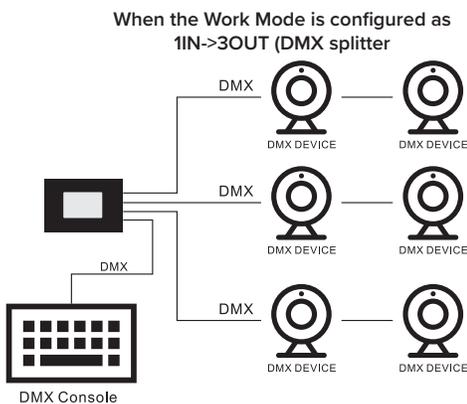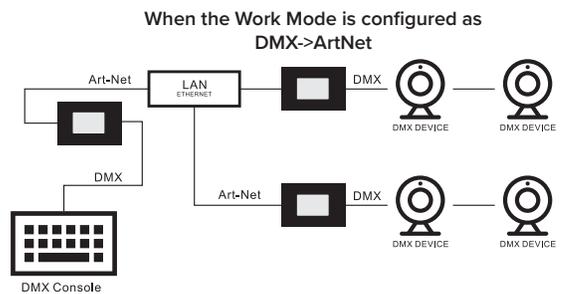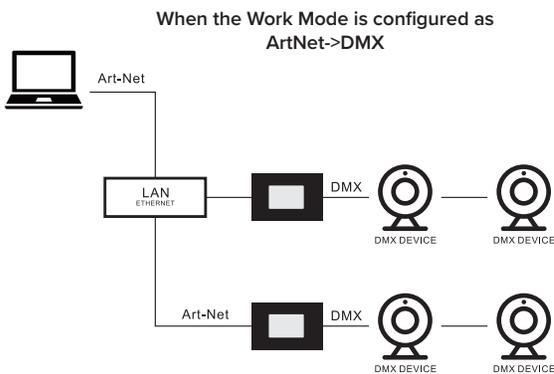

Notes:

1. The Ethernet ports are through ports, each port can be either an input or an output port.
2. The 4 DMX ports can be all out ports, only the Port 1 can be configured as DMX In port.
3. The device has Ethernet switch capability and the 2 Ethernet ports are through ports that allow daisy chaining of the devices.



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.