



PROJECT:

TYPE:

LOCATION:

CAT:



Description

Trulux back-lit touch wall control for tunable CCT light control; 1-4 operation with 1-3 scene control.

Features

- Touch for On/Off control
- Swipe for 2700K-6000K light control and full range dimming (5-100%)
- Toggle between tunable CCT and brightness control
- Smooth glass faceplate with illuminated controls
- Radio frequency (RF) signal range up to 65 feet
- Control multiple receivers in multiple zones (1-4)
- 3 customizable scenes
- Requires 12-24V DC input
- Requires Trulux DMX receiver for operation (sold separately)

Mounting

Flush mount to wall or flat surface (1-3/4" x 2-5/8" cut-out)

Applications

Dimming, zone, and scene control for tunable CCT

Warranty


3 years

Technical Information



Voltage	12-24V DC
Power Consumption	200mA
Output	DMX 512 Signal
Operating Temperature	0° - 40°C
Relative Humidity	8% - 80%
Rating	FCC Compliant, RoHS Compliant, dry location

Dimensions

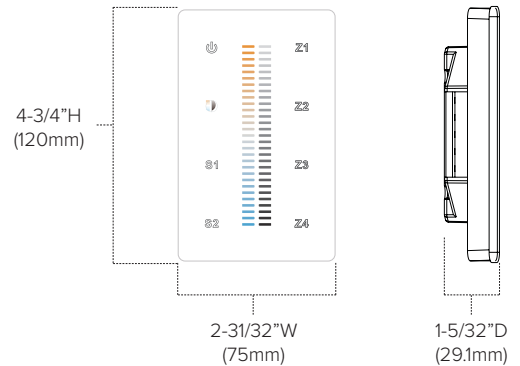

Recommended Receivers

Part Number	Description	Application	Input	Current	Output	Listing	Dimensions
REC-DMX-5A-4Z	Trulux DMX 512 Receiver	Dry location	12-36V DC	4x5A	4x(60-180)W	RoHS	7-1/16" x 1-13/16" x 6-23/32"
REC-DMX-5A-4Z-PLUS	Trulux DMX 512 Receiver with Standalone mode	Dry location	12-36V DC	4x5A	4x(96-288)W	RoHS	(178.9mm x 45.5mm x 18.6mm)

Controller can be powered from secondary side of 12-24V DC driver being used to power the Trulux receiver/Trulux tape light. See 'Trulux Control Options' on selected tape light for more information.

Ordering Information

Trulux DMX Tunable CCT Touch Wall Control



DMX-2-2 includes:

- (1) Trulux DMX Tunable CCT Touch Wall Control (requires Trulux DMX receiver, sold separately)

Example Part # **DMX-TW-4Z**

