

Key Features & Benefits:

- Kelvin and Wattage Selectable
- Built In Photocell
- Occupancy and Emergency Options
- Stand-alone 10kV Surge Protection
- Available in White and Bronze Finishes

Project: _____

Date: _____

Catalog #: _____

Notes: _____

Product Specifications:

Selectable Wattage: 65W–85W–110W
 Lumen Output: Up to 13,174 Lumens
 Efficacy (lm/W): Up to 125 Lumens per Watt
 Kelvin: 3000K–4000K–5000K
 Protection: Standard 10kV Surge Protection
 CRI: >80
 Power Frequency: 50/60Hz
 Power Factor: >0.9
 Operating Temperature: -40°F to 122°F
 (-40°C to 40°C)
 Input Voltage: 120–277VAC
 Estimated L70 Lifetime 149,000 hrs Calculated
 Per TM21
 Warranty: 5 Year Warranty
 Product Weight: 11.88 lbs



Easy Access to Photocell with On/Off Switch and Patent Pending Easy Replacement



Ordering Guide:

ESL	-	TYPE	-	WATTAGE	-	GENERATION	-	KELVIN	-	VOLTAGE	-	FINISH	-	OPTIONS
ESL	-	FCWP	-	65110W	-	2	-	3050	-	(blank) 120–277 VAC	-	ff	-	
		(FCWP) Full Cut Off Wall Pack		(65110) 65W–85W–110W		(2) 2nd Generation		(3050) 3000K–4000K–5000K		(blank) 120–277 VAC		(BZ) Bronze (WH) White		

FACTORY INSTALLED OPTIONS

EM5	Emergency backup battery unit, auto test function, 5 watts output, 90 minutes min, 120–277VAC Input, 30–200VDC output, closed lead wiring, UL listed for factory installation
11OCC	Microwave Occupancy Sensor

Catalog Data:


ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	EFFICACY (lm/W)	DIMENSIONS	DLC QPL CODE
ESL-FCWP-2555W-23050-BZ	25–40–55	3000K–4000K–5000K	6,897	125	14.2" x 9.55" x 5.15"	S-2Q6DUH
ESL-FCWP-2555W-23050-WH	25–40–55	3000K–4000K–5000K	6,897	125	14.2" x 9.55" x 5.15"	S-2Q6DUH
ESL-FCWP-65110W-23050-BZ	65–85–110	3000K–4000K–5000K	13,174	125	14.2" x 9.55" x 8.15"	S-5BSL4M
ESL-FCWP-65110W-23050-WH	65–85–110	3000K–4000K–5000K	13,174	125	14.2" x 9.55" x 8.15"	S-5BSL4M

Electrical Load — Standard Voltage:


SYSTEM WATTS	INPUT CURRENT				INPUT WATTAGE	INPUT FREQUENCY	POWER FACTOR	THD	OPERATING TEMPERATURE	SURGE PROTECTION	DIMMING
	120 VAC	208 VAC	240 VAC	277 VAC							
25	0.21	0.12	0.10	0.09	120-277 VAC	50°60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	Driver 6kV 10kV stand alone	0-10V Range 0-100%
40	0.33	0.19	0.17	0.14	120-277 VAC	50°60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	Driver 6kV 10kV stand alone	0-10V Range 0-100%
55	0.46	0.26	0.23	0.20	120-277 VAC	50°60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	Driver 6kV 10kV stand alone	0-10V Range 0-100%
65	0.54	0.31	0.27	0.23	120-277 VAC	50°60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	Driver 6kV 10kV stand alone	0-10V Range 0-100%
85	0.71	0.41	0.35	0.31	120-277 VAC	50°60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	Driver 6kV 10kV stand alone	0-10V Range 0-100%
110	0.92	0.53	0.46	0.40	120-277 VAC	50°60 Hz	>0.9		-40°F to 122°F (-40°C to 50°C)	Driver 6kV 10kV stand alone	0-10V Range 0-100%

Dimensions:

2555W

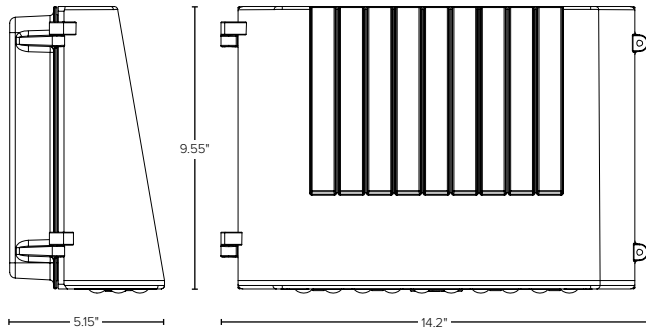


65110W

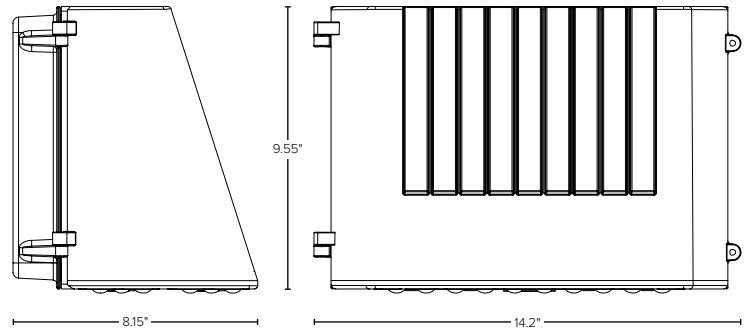


Mounting Dimensions

Kelvin and Wattage Switch

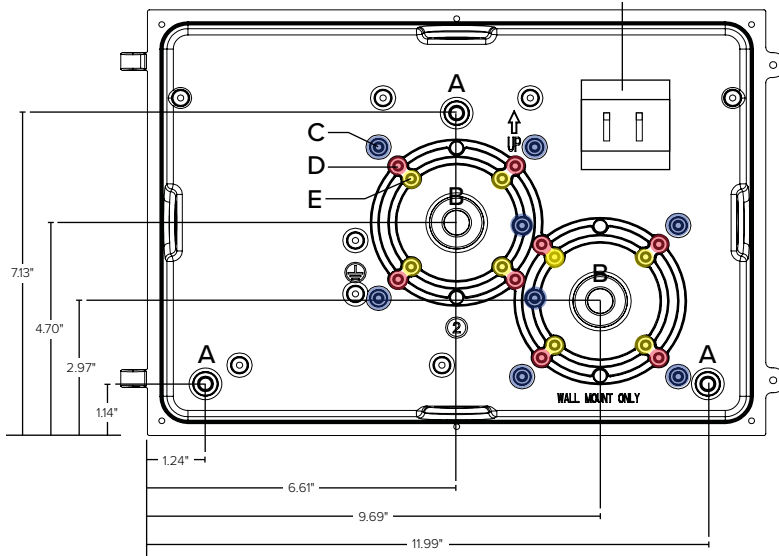

Photometric Lighting Diagram

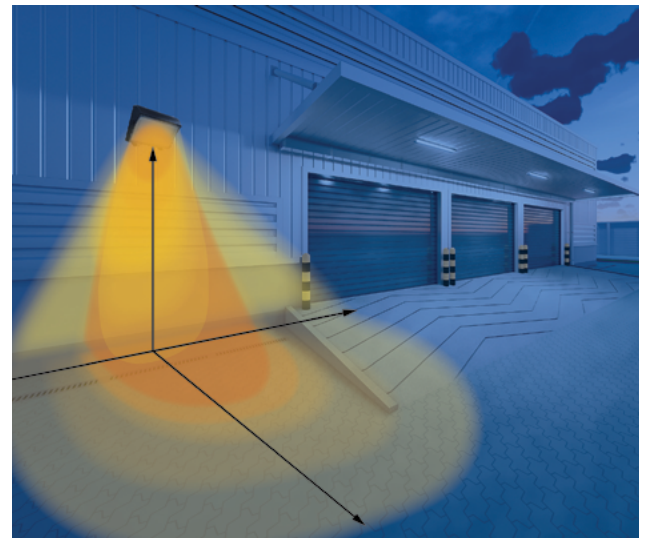

Drill the mounting holes (A), and if pulling wire from a j-box, drill the appropriate center hole (B) and j-box holes (C, D, or E). There are two possible j-box locations, only drill the required holes.