

### Key Features & Benefits:

- Kelvin and Wattage Selectable
- Built In Photocell
- Occupancy and Emergency Options
- Stand-alone 10kV Surge Protection
- Available in White and Bronze Finishes

Project: \_\_\_\_\_

Date: \_\_\_\_\_

Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

### Product Specifications:

Selectable Wattage: 25W–40W–55W  
 Lumen Output: Up to 6,897 Lumens  
 Efficacy (lm/W): Up to 125 Lumens per Watt  
 Kelvin: 3000K–4000K–5000K  
 Protection: Standard 10kV Surge Protection  
 CRI: >80  
 Power Frequency: 50/60Hz  
 Power Factor: >0.9  
 Operating Temperature: -40°F to 122°F  
 (-40°C to 50°C)  
 Input Voltage: 120–277VAC  
 Estimated L70 Lifetime 163,000 hrs Calculated  
 Per TM21  
 Warranty: 5 Year Warranty  
 Product Weight: 6.63 lbs



Easy Access to Photocell with On/Off Switch and Patent Pending Easy Replacement



### Ordering Guide:

| ESL | - | TYPE                          | - | WATTAGE             | - | GENERATION         | - | KELVIN                   | - | VOLTAGE             | - | FINISH                 | - | OPTIONS |
|-----|---|-------------------------------|---|---------------------|---|--------------------|---|--------------------------|---|---------------------|---|------------------------|---|---------|
| ESL | - | FCWP                          | - | 2555W               | - | 2                  | - | 3050                     | - | (blank) 120–277 VAC | - | ff                     | - |         |
|     |   | (FCWP) Full Cut Off Wall Pack |   | (2555W) 25W–40W–55W |   | (2) 2nd Generation |   | (3050) 3000K–4000K–5000K |   | (blank) 120–277 VAC |   | (BZ) Bronze (WH) White |   |         |

### FACTORY INSTALLED OPTIONS

|       |   |
|-------|---|
| EM5   | Emergency backup battery unit, auto test function, 5 watts output, 90 minutes min, 120–277VAC Input, 30–200VDC output, closed lead wiring, UL listed for factory installation |
| 11OCC | Microwave Occupancy Sensor  |

### Catalog Data:


| ITEM#                    | SELECTABLE WATTAGE | SELECTABLE KELVIN | MAX LUMEN OUTPUT | EFFICACY (lm/W) | DIMENSIONS            | DLC QPL CODE |
|--------------------------|--------------------|-------------------|------------------|-----------------|-----------------------|--------------|
| ESL-FCWP-2555W-23050-BZ  | 25–40–55           | 3000K–4000K–5000K | 6,897            | 125             | 14.2" x 9.55" x 5.15" | S-2Q6DUH     |
| ESL-FCWP-2555W-23050-WH  | 25–40–55           | 3000K–4000K–5000K | 6,897            | 125             | 14.2" x 9.55" x 5.15" | S-2Q6DUH     |
| ESL-FCWP-65110W-23050-BZ | 65–85–110          | 3000K–4000K–5000K | 13,174           | 125             | 14.2" x 9.55" x 8.15" | S-5BSL4M     |
| ESL-FCWP-65110W-23050-WH | 65–85–110          | 3000K–4000K–5000K | 13,174           | 125             | 14.2" x 9.55" x 8.15" | S-5BSL4M     |

### Electrical Load — Standard Voltage:


| SYSTEM WATTS | INPUT CURRENT |         |         |         | INPUT WATTAGE | INPUT FREQUENCY | POWER FACTOR | THD | OPERATING TEMPERATURE             | SURGE PROTECTION               | DIMMING               |
|--------------|---------------|---------|---------|---------|---------------|-----------------|--------------|-----|-----------------------------------|--------------------------------|-----------------------|
|              | 120 VAC       | 208 VAC | 240 VAC | 277 VAC |               |                 |              |     |                                   |                                |                       |
| 25           | 0.21          | 0.12    | 0.10    | 0.09    | 120–277 VAC   | 50/60 Hz        | >0.9         |     | -40°F to 122°F<br>(-40°C to 50°C) | 6kV Driver<br>10kV Stand-Alone | 0–10V<br>Range 0–100% |
| 40           | 0.33          | 0.19    | 0.17    | 0.14    | 120–277 VAC   | 50/60 Hz        | >0.9         |     | -40°F to 122°F<br>(-40°C to 50°C) | 6kV Driver<br>10kV Stand-Alone | 0–10V<br>Range 0–100% |
| 55           | 0.46          | 0.26    | 0.23    | 0.20    | 120–277 VAC   | 50/60 Hz        | >0.9         |     | -40°F to 122°F<br>(-40°C to 50°C) | 6kV Driver<br>10kV Stand-Alone | 0–10V<br>Range 0–100% |
| 65           | 0.54          | 0.31    | 0.27    | 0.23    | 120–277 VAC   | 50/60 Hz        | >0.9         |     | -40°F to 122°F<br>(-40°C to 50°C) | 6kV Driver<br>10kV Stand-Alone | 0–10V<br>Range 0–100% |
| 85           | 0.71          | 0.41    | 0.35    | 0.31    | 120–277 VAC   | 50/60 Hz        | >0.9         |     | -40°F to 122°F<br>(-40°C to 50°C) | 6kV Driver<br>10kV Stand-Alone | 0–10V<br>Range 0–100% |
| 110          | 0.92          | 0.53    | 0.46    | 0.40    | 120–277 VAC   | 50/60 Hz        | >0.9         |     | -40°F to 122°F<br>(-40°C to 50°C) | 6kV Driver<br>10kV Stand-Alone | 0–10V<br>Range 0–100% |

### Dimensions:


2555W

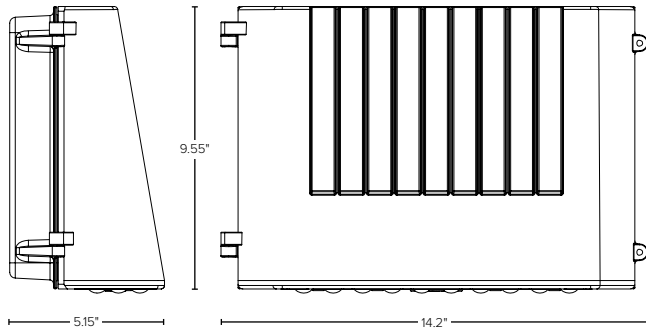


65110W

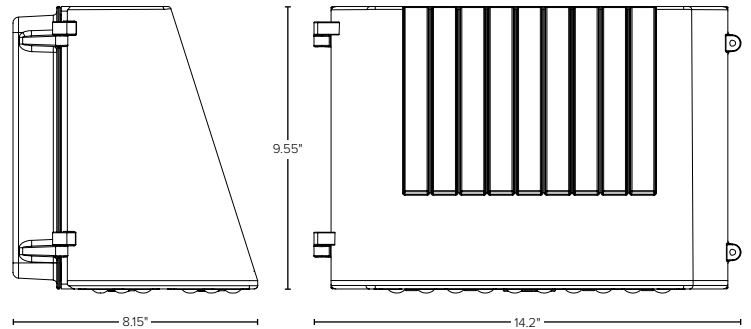

### Mounting Dimensions

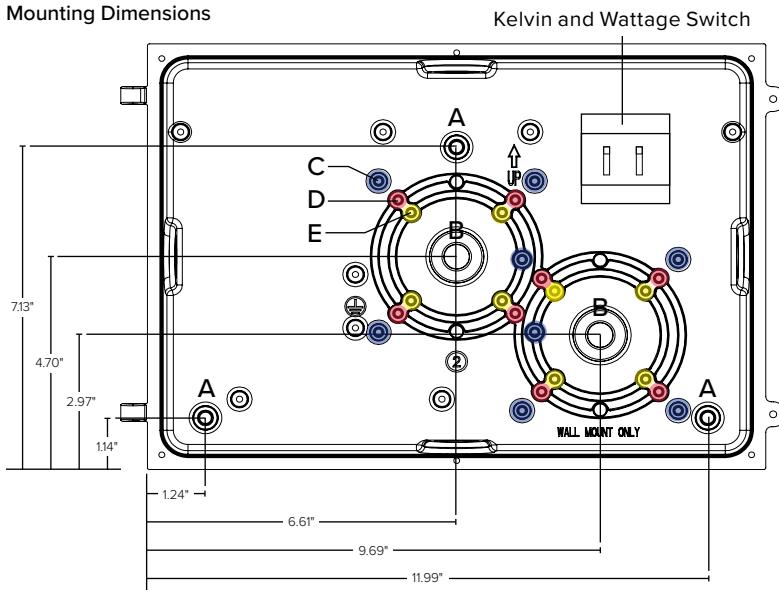

### Photometric Lighting Diagram

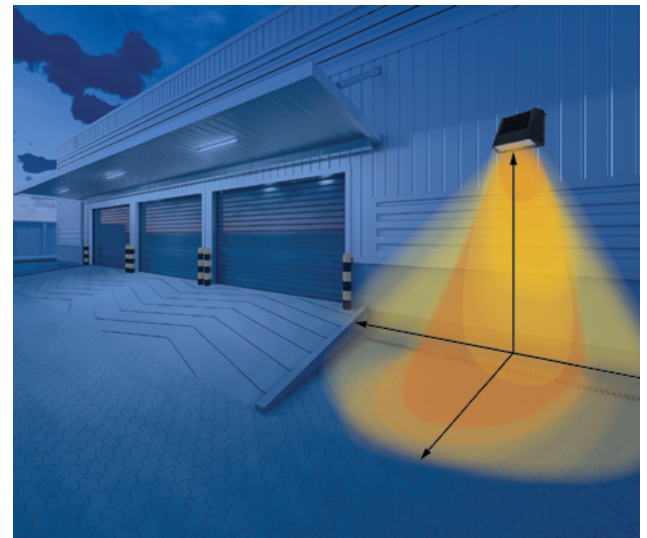

Drill the mounting holes (A), and if pulling wire from a j-box, drill the appropriate center hole (B) and j-box holes (C, D, or E). There are two possible j-box locations, only drill the required holes.