



Item#: **55394**
LED EMERGENCY PACK - 8W
LED BACK-LIT PANELS

FEATURES



- Internal LiFePO4 battery
- Test switch indicator light
- Deep discharge protection

APPLICATION

For use with LED Back-Lit Panels.

COMPATIBLE BACK-LIT PANELS with a production month of June 2020 (20/06) or later. Older versions will be missing the knockout on one end.

55550	55558	55565	55581
55554	55562	55566	55582
55556	55563	55567	
55557	55564	55580	



INPUT

Input Power	5W Max.
Input Current	80mA Max.
Input Voltage	100-277V, 50/60Hz
Input Over Current Protection	Yes

OUTPUT

Output Power	8W
Output Current	160-540mA
Output Voltage	15-50Vdc
Output Over Voltage Protection	Yes
Output Under Current Protection	Yes
Output Short Circuit Protection	Yes

PERFORMANCE

Emergency Time	90 Mins.
Recharge Time Required	24 Hours
Battery Type	LiFePO4 6.4v3.2Ah 20.48Wh

ENVIRONMENT

Operating Temperature	50° ~ 122° F
Suitable Location	DAMP
Ingress Protection Rating	IP20

LIFESPAN

Warranty (Years)	5
------------------	----------

QUALIFICATIONS



Specifications are subject to change without notice.

Item#: **55394**
LED EMERGENCY PACK - 8W




DIMENSIONS (Inches)

Length	9.5"
Width	1.8"
Height	1.2"
Net Weight (Lbs)	--

SUPPORTING DOCUMENTS (Grey = not available at this time.)

Product Sheet	VIEW
Install Instructions	VIEW

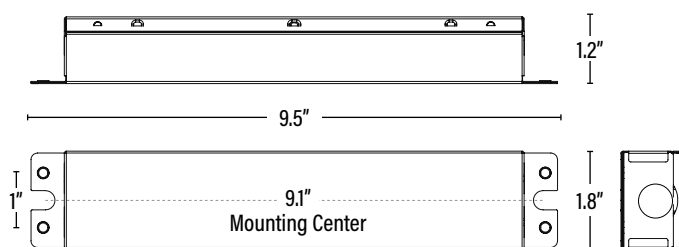

PACKAGING

		UPC	DIMENSIONS (LxWxH)	GROSS WEIGHT (Lbs)
Master Carton	10	10811768029465	17.1" x 16.3" x 8.7"	20.9
Individual Box	1	811768029468	--	2.1
Country of Origin	China			
HS Tariff	--			

ORDERING

ITEM#	DESCRIPTION	TITLE 20	CASE
55394	EMERGENCY PACK FOR LED PANEL 8W/90 MIN - SUPERIOR LIFE®	--	10

ACCESSORIES

55395	MOUNTING BRACKET AND WIRE BOXES FOR 55394 EMERGENCY PACK FOR LED 1X4 PANEL - SUPERIOR LIFE®		20
55393	MOUNTING BRACKET AND WIRE BOXES FOR 55394 EMERGENCY PACK FOR LED 2X2 OR 2X4 PANEL - SUPERIOR LIFE®		20

ADDITIONAL INFORMATION:

- For use with LED fixture drivers that are 300W or less.
- Use with grounded fixtures in dry or damp locations only.
- Not intended for use in luminaries for high-risk task area lighting.