

Operation manual LED Flush mount light Blink Slim Pendant Kit

With Integrated Dimmable Driver




Thank you for purchasing our product. Before assembling please read this Operation Manual carefully and save in a safe place for future reference. Please note that all electrical connections must be in accordance with local and National Electrical Code standards as well as local building codes. In case you are not familiar with proper wiring connections and building codes, consult a qualified electrician.

Safety recommendations


1. RISK OF ELECTRIC SHOCK – THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH APPLICABLE INSTALLATION CODES BY A PERSON FAMILIAR WITH MENTIONED ABOVE CODES AND HAZARDS INVOLVED. DISCONNECT POWER AT CIRCUIT BREAKER OR FUSE BEFORE INSTALLING OR SERVICING.
2. Before use of the product carefully read the whole Operation Manual.
3. THE PRODUCT IS PURPOSED FOR INTERIOR USE ONLY, SUITABLE FOR DAMP LOCATIONS.
4. Assemble the product only with the use of parts provided and the housing;
5. improper assembly may result in device failing which could damage the product, personal property or cause injury.
6. Assembly shall follow with accessories delivered with the set only.
The device is not a toy, KEEP OUT OF REACH OF CHILDREN.

Specifications:

Blink Pendant
Operating Voltage: 120V
Dimming: Triac
Power consumption: 12 W, 16 W
Color Temp.: 3000 K
CRI: 90
Lumen: 960 lm, 1300 lm

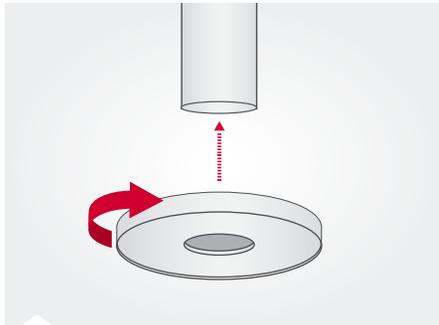

STEP 1: Align threads from pipe of pendant kit to mounting bracket. Turn clockwise and lock pipe on mounting bracket.

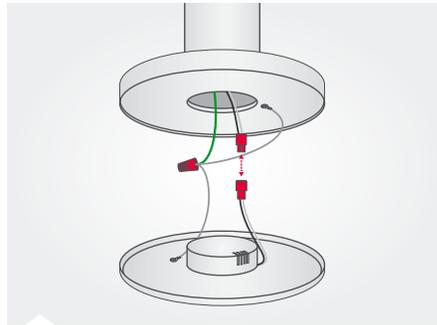


STEP 2: Make ground connection. Next simply „click“ the two sides of the orange wire connector together.




STEP 7: Fixture installed.




STEP 3: ☉ Align the arrow sign ▼ from pendant kit to unlock-sign ☒ from fixture.
☉ Turn clockwise to locked-sign ☒ to lock fixture in place. Remove label.

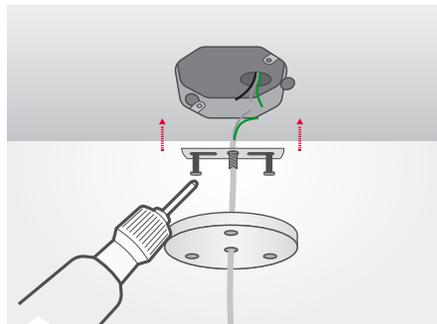

STEP 4: Attach the bracket to junction box using the 2 screws (provided). Pull the AC cables through the bracket center hole.

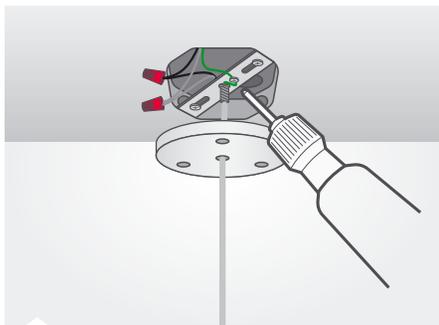

STEP 5: Attach connector (provided) to AC cable from junction box: L side to Black side wire. N side to White AC wire.

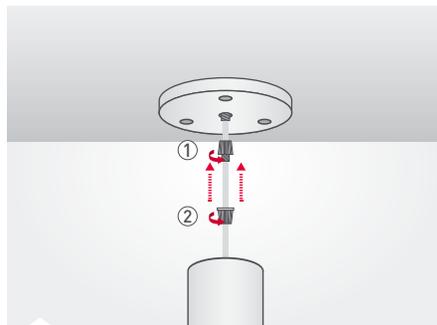

STEP 6: Push and feed all wires up into junction box as you raise the cover plate into place. Tighten the 2 nuts (provided) one by one.

Installed-Congratulations...
Enjoy the light!



Cleaning

- Clean with a soft or damp cloth. While cleaning with the damp cloth make sure the power is off.
- Do not clean with abrasives.

5 Year limited warranty

The purchased product is covered with a 5 year warranty in respect of any defect in material or workmanship after purchase date.

Satco shall bear no responsibility on account of guarantee, as well as shall bear no liability for any faults, in case of improper operation, use negligence, accident or exposure to natural hazard, or excessive use over the limits specified for the unit, or if any unauthorized alteration or repair followed.