

Cass LED Ceiling CSSC Series

Features

This ceiling fixture features three-sided illumination with a white acrylic diffuser. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Fixture mounts to standard junction box (not included).

Construction

Extruded aluminum housing. The canopy fits over a standard junction box. Power supply connections must be made inside a junction box (not included).

Finish

Black, Gold, or Satin Nickel finish.

Diffuser

White acrylic diffuser.

Electrical

Input 120 VAC 60 HZ. Compatible with TRIAC and ELV dimmers.

LED

Integrated LED modules capable of producing: 30W = 3200 source lumens, 2040 delivered lumens 38W = 4000 source lumens, 2600 delivered lumens 3000K (CCT). Rated for 50,000 Hrs., 90 CRI.

Certification


All fixtures are cETLus listed for indoor damp locations. Title 24/JA8 compliant.


Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 year from date of purchase.

Specifications and dimensions subject to change without notice.

LOCATION	DATE
PREPARED BY	QUANTITY
COMMENTS	FIXTURE TYPE
CATALOG NUMBER	

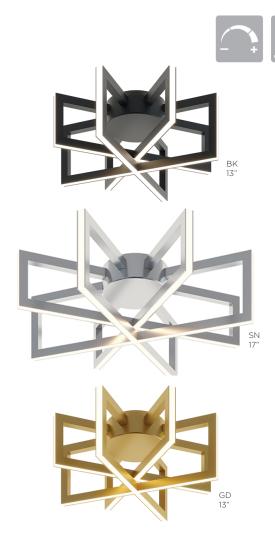



Ordering Information:

				Source	Delivered			
Black	Gold	Satin Nickel	LED	Lumens	Lumens	CCT	D	DIA.
CSSC13L30D1BK	CSSC13L30D1GD	CSSC13L30D1SN	30W	3200	2040	3000K	5-1/4"	13"
CSSC17L30D1BK	CSSC17L30D1GD	CSSC17L30D1SN	38W	4000	2600	3000K	5-1/4"	17"