SYLVANIA Lamps

LEDlescent[™] T8 8ft 2-Piece Ballast-Free Lamps

Application

LEDlescent T8 and T8HO Ballast-Free lamps are an energy saving alternative, designed to replace traditional fluorescent T8/T12 lamps by bypassing the existing ballast. These LED T8 lamps contain no mercury, provide instant light and a uniform light distribution. Engineered to operate directly on 120-277V, these lamps minimize labor and recycling costs. Our revolutionary design features two four-foot pieces that connect making logistics easier and more cost efficient. These lamps are constructed with PET shatter resistant film to contain components should the tube break. Available in 8-foot lengths but ships in two 4-foot sections, saving money on shipping and storage, and minimizes the opportunity for breakage in the process.

When installing the LEDlescent T8 lamps, the UL rating of the existing fixture is not voided (even when it is electrically modified) since our LEDlescent T8 lamp is UL Classified (as a luminaire conversion retrofit kit) under UL standard 1598C. UL 1598C is the standard covering LED retrofits intended for an existing UL rated fixture. Since the user is retrofitting with a UL1598C classified LED kit, the installer must follow the installation instructions included with the lamps for the modified fixture to retain its UL rating.

Benefits and Features

- Industry changing two-piece snap-fit design that is available in two wattages: 36W and 42W
- Frosted glass optics with shatter-resistant PET coating
- 36W available in FA8, Single-Pin base
- Base Flexibility: 42W Lamps ship with FA8 base (singlepin) but kit includes R17D (recessed double-contact) base to allow for retrofit into T8 or T12 Slimline (FA8) or T8HO applications (R17D)
- Kit includes bracket and screw for support in the middle of the lamps
- Double-ended wiring configuration
- CCT: 3000K, 3500K, 4100K, 5000K
- Beam angle: 200°
- Safety circuit prevents current from flowing through the lamp when only one end is engaged in the socket thereby eliminating potential shock hazard
- No risk of electrical arcing between the lamp pins and the lamp holders
- Suitable for dry and damp locations (cannot come in direct contact with water)
- Suitable for open and enclosed fixtures





Wattage Comparison

Traditional Source	Traditional System Wattage	LED System Wattage	Energy Savings*
F096T8 w/QHE 2X59 T8/UNV ISN	109	72	34%
F096T8 w/QHE 2X59 T8/UNV ISN	109	84	23%
F096T8H0 w/QHE 2X86 T8H0/UNV PSN	182	84	54%

*Energy savings over life of lamp calculated at \$0.11/kWh If replacing T12 Slimline, savings is greater than 55%

- These lamps have been tested and approved with some 0-10V dimmers
- No warm-up time, instant-on with full light output and stable lamp-to-lamp color

Electrical

- Input voltage range: 120-277VAC
- Input voltage tolerance: ±10% (108V-305V)
- Power Factor >0.9
- THD <25%

Rated Life

- 50,000 hours (L₇₀)

Warranty

- 5-year limited lamp warranty (24/7 operation)
- NLB Trusted Warranty Program

Ambient Operating Range

-4°F to +113°F (-20°C to +45°C)

Certifications and Listings

- UL 1993
- cUL1993
- UL1598C
- cUL1598C
- NSFDLC 5.1

RoHS

- FCC



Specification Data

Catalog #	Туре
Project	
Comments	
Prepared by	

Ordering Guide

LED	ХХ	T8XX	FA8	L96	-2	FGP	DIM	8	XX	BF
LED LED = LED Lamp	Wattage 36 = 36 Watts 42 = 42 Watts	Lamp Type T8 = T8 T8H0= T8H0†	Base Type FA8 = FA8	Length L96 = 96in (8ft)	-2 = 2-piece	Bulb Finish FGP = Frosted Glass w/PET	Dimming DIM = Dimmable	CRI 8 = 80+	CCT 30 = 3000K 35 = 3500K 41 = 4100K 50 = 5000K	Operation BF = UL Type B

Ordering Information

					Input	Average		Typical					
Item	Ordering	Wattage	Base		Voltage	Rated		Lumens		Power		Case	DLC
Number	Abbreviation	(W)	Туре	Replaces*	(V)	Life (hrs.)	CCT	(Im)	CRI	Factor	Bulb Finish	Qty	Listed
41577	LED36T8FA8L96-2FGPDIM830BF	36	FA8	F096T8	120-277V	50,000	3000K	4400	82	>0.90	Frosted Glass w/PET	10	5.1
41578	LED36T8FA8L96-2FGPDIM835BF	36	FA8	F096T8	120-277V	50,000	3500K	4400	82	>0.90	Frosted Glass w/PET	10	5.1
41579	LED36T8FA8L96-2FGPDIM841BF	36	FA8	F096T8	120-277V	50,000	4100K	4400	82	>0.90	Frosted Glass w/PET	10	5.1
41580	LED36T8FA8L96-2FGPDIM850BF	36	FA8	F096T8	120-277V	50,000	5000K	4400	82	>0.90	Frosted Glass w/PET	10	5.1
41872	LED42T8H0L96-2FGPDIM830BF	42	FA8/R17D	F096T8/F096T8H0	120-277V	50,000	3000K	5040	82	>0.90	Frosted Glass w/PET	10	5.1 [†]
41873	LED42T8H0L96-2FGPDIM835BF	42	FA8/R17D	F096T8/F096T8H0	120-277V	50,000	3500K	5040	82	>0.90	Frosted Glass w/PET	10	5.1 [†]
41874	LED42T8H0L96-2FGPDIM841BF	42	FA8/R17D	F096T8/F096T8H0	120-277V	50,000	4100K	5040	82	>0.90	Frosted Glass w/PET	10	5.1 [†]
41875	LED42T8HOL96-2FGPDIM850BF	42	FA8/R17D	F096T8/F096T8H0	120-277V	50,000	5000K	5040	82	>0.90	Frosted Glass w/PET	10	5.1 [†]

*Can also be used to replace T12 Slimline 8ft (F96T12 with FA8 base). *LED42T8HOL96 lamps ship with FA8 bases and are DLC approved. DLC does not have a category for lamps having R17D bases.

Dimming Module Ordering Information

Item Number	Ordering Abbreviation	Dimming	Input Voltage	Input Current	Input Wattage	Output Wattage	Efficiency	Lifetime	Warranty
75826	LVDC100WTLEDUNVDIM	0-10V	120-277Vac	Max. 1000mA	Max. 100W	Max. 95W	Max. 95%	50,000 hrs	5 yrs


Specifications & Lighting Data

		Current – 120V/277V	System Power	System Lumens	System Efficacy	
Lamp	Ballast	(AMPS)	(W)	(Im)	(Im/W)	No of Lamps
LED36T8FA8L96-2FGPDIM8XXBF	N/A	1.2/0.52	72	8800	122	2
LED42T8H0L96-2FGPDIM8XXBF	N/A	1.4 /0.61	84	10,080	120	2


Lamp Physical Information

ī.

Lamp Description	End of Base Pin to End of Opposite Pin End	Base Face to Base Face	Length of Center Connector Piece	Bulb Outside Diameter
LED36T8FA8L96-2FGPDIM8XXBF	93.88" ±0.08" (2384mm ±2mm)	93.19"±0.08" (2367mm±2mm)	2.33" ±0.04" (59.3mm ±1mm)	1.00" ±0.08" (25.4mm±2.0mm)
LED42T8H0L96-2FGPDIM8XXBF	93.88" ±0.08" (2384mm ±2mm)	93.19"±0.08" (2367mm±2mm)	2.33" ±0.04" (59.3mm ±1mm)	1.00" ±0.08" (25.4mm±2.0mm)



Dimming Module

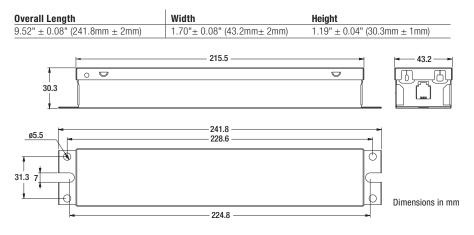

Features

j



36W has FA8 base 42W ships with FA8 and includes R17D for HO applications

Application Information

- 1. Please read and comply with all instructions before attempting installation.
- 2. All installation, inspection, and maintenance of lighting fixtures should be done with the power to the fixture turned off. Lamps should be installed and operated in compliance with the National Electrical Code (NEC), Underwriters Laboratories Inc. (UL) requirements, and all applicable codes and regulations.
- 3. Please do not install LED lamps and fluorescent lamps in the same fixture.
- 4. Ensure lamp holders/sockets are in good operating condition before installation.
- 5. Best practice: cap off the remaining ballast wires should the ballast be left in the fixture after disconnecting.
- 6. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- 7. When using LEDlescent lamps, to conform to UL, you MUST affix the luminaire warning sticker, included inside the packaging, to the fixture during installation.
- 8. EM ballast that operates with fluorescent ballasts must be disconnected from the lamps.
- 9. Make sure the lamps have the proper connections before restoring power.
- 10. Operating temperature range between -4°F and 113°F (-20°C and 45°C).
- 11. Suitable for use in dry and damp environments.
- 12. For detailed warranty information, please see www.ledvanceUS.com.

LEDVANCE LLC 181 Ballardvale Street Wilmington, MA 01887 USA Phone 1-800-LIGHTBULB (1-800-544-4828) www.ledvanceUS.com

SYLVANIA and LEDVANCE are registered trademarks. All other trademarks are those of their respective owners. Licensee of product trademark SYLVANIA in general lighting. Specifications subject to change without notice.



📑 /sylvania

