



LED HID Corn Cob Lamps

LED HID Corn Cob Lamp Installation and Instruction Guide

WARNING! RISK OF ELECTRIC SHOCK! DISCONNECT POWER AT FUSE OR CIRCUIT BREAKER BEFORE INSTALLING OR SERVICING!


STEP #1



POWER OFF


TURN OFF POWER AT CIRCUIT BREAKER to prevent risk of electric shock.

STEP #2

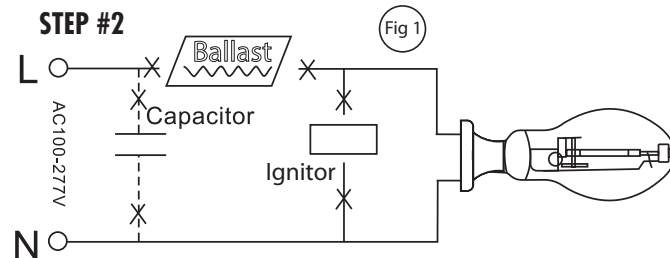

Remove old ballast or disconnect from existing lamp holder. Remove and dispose of ballast in correct manner (also disconnect any other components such as ignitors, starters, capacitors). Shown as Figure 1.

STEP #3 (OPTIONAL)

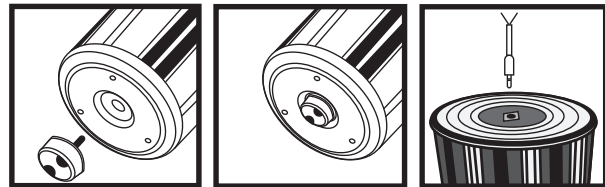


Sensor Installation

3 In 1 Dimming Wire Installation

HID Replacement Lamp Accessories Installation
Connect as shown in Figure 2 and 3.


The sensor/wire should be connected before the lamp is installed.
Connect dimming wire to manufacturer's dimming system as per instructions.

STEP #4

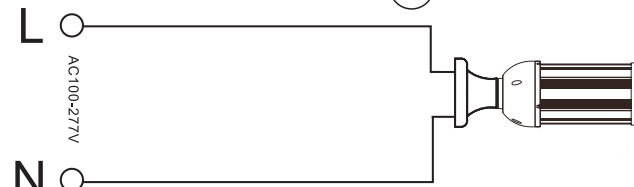

Reconnect directly to the existing lamp holder.
Install new LED replacement lamp. Shown as Figure 4.
Please make sure old socket is correctly grounded.

STEP #5



If lamp being installed is over 60w, attach provided tether cable to lamp. Locate either entry hole(1) on lamp shown in diagram and feed looped end of tether cable(2) through hole. You may need to crimp with pliers first. Once through, take end with grappling clip through loop as shown, tighten and secure clip to safe location.

STEP #6

This luminaire has been modified to operate LED lamps. Do not attempt to install or operate HID lamps or Compact Fluorescent Luminaires in this luminaire. In the future, use only bypass lamps.
LED RETROFIT LUMINAIRE CONVERSION
FOR USE ONLY WITH PRODUCTS DESCRIBED AND INSTALLED IN ACCORDANCE WITH THE INSTRUCTIONS PROVIDED WITH THE RETROFIT KIT (E333692)
Order at www.tcp.com
REPLACEMENT LAMP:
LXXCCE26UYK ("XX" = 12W & 18W & 27W & 36W & 45W & 54W & 63W & 100W & 120W)
LXXCCE39UYK ("XX" = 45W & 54W & 63W & 100W & 120W)
LXXCCE26HYK ("XX" = 36W)
LXXCCE39HYK ("XX" = 54W & 100W)

Please apply included label to retrofitted luminaire in a visible location.

STEP #7



POWER ON

TURN ON POWER AT CIRCUIT BREAKER



LED HID Replacement Corn Cob Lamps

Product Specifications

TCP's energy-efficient LED HID Replacement Corn Cob lamps are an excellent choice for replacing traditional high-intensity discharge lamps. They are damp location rated and designed for indoor/outdoor use where low maintenance and high lumen output is required.

Reasons to choose the LED HID Replacement Corn Cob Lamps from TCP

- Uses 85% less energy than high-intensity discharge products
- 50,000 hour life minimizes maintenance costs
- UL approved for damp locations and rated for enclosed fixtures
- 360° beam angle for full light distribution
- Isolated driver allows for better heat dissipation and eliminates the need for a ballast
- Surge protection – all lamps have 4kV surge protection
- Pair with HID Replacement Accessories to add features such as motion sensing, natural light detection, and to connect to an external 0-10, PWM, or resistance dimming system

Ideal Fixture for Lamp Replacements

- Canopies
- Round High & Low Bays
- Post Tops
- Acorns

Typical Applications

- Warehouses
- Parking Lots
- Street Lights
- Industrial Lighting

Specifications

Color Temperatures 4000K, 5000K
Wattage Replacements 50W, 75W, 100W, 175W, 200W, 250W, 300W, 320W, 400W, 500W
Input Line Voltage 100-277, 277-480VAC
Input Line Frequency 50/60Hz

Lamp Life (Rated) 50,000 hours
Minimum Starting Temp -40°C
Maximum Operating Temp 60°C
CRI ≥ 85
Surge Protection 4kV

TCP®


325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

©TCP JUN 2025/WF297609



TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com



*Based on 12 hours use per day




LED HID Corn Cob Lamps



LED HID Corn Cob Lamps

Specifications

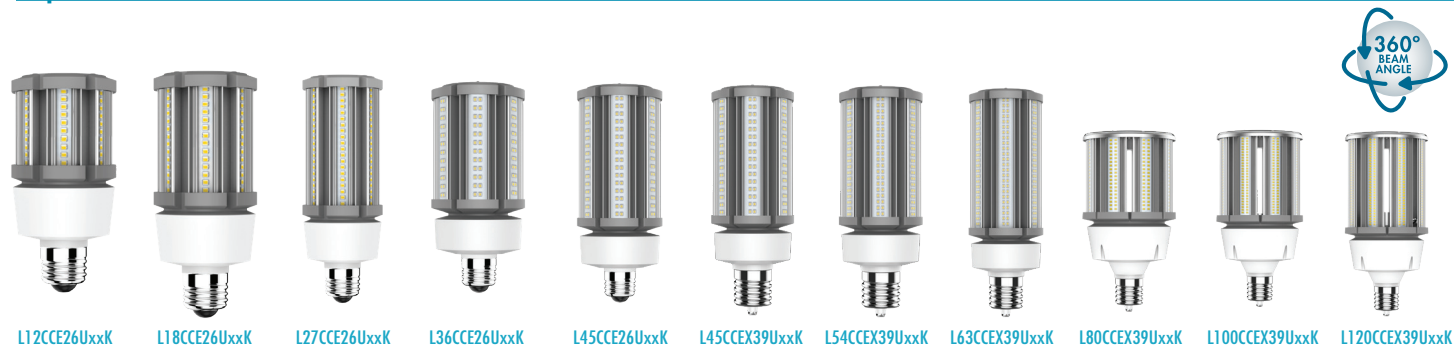

ITEM #	DESCRIPTION	DLC	HID WATT EQUIVALENT	VOLTAGE	WATTAGE	LUMENS	CRI	COLOR TEMP	MOL (inches)	DIA (inches)	MIN ENCLOSURE DIMENSION (INCHES)	BASE	HID REPLACEMENT LAMP ACCESSORIES	CASE QTY
LED HID Corn Cob Lamp Series - 100-277 VAC														
50W LED HID														
L12CCE26U40K	COB 12W HID50 E26 40K		50	100-277	12	1800	85	4000K	4.9	2.3	N/A	E26	NO	16
L12CCE26U50K	COB 12W HID50 E26 50K		50	100-277	12	1800	85	5000K	4.9	2.3	N/A	E26	NO	16
75W LED HID														
L18CCE26U40K	COB 18W HID75 E26 40K		75	100-277	18	2700	85	4000K	5.7	2.3	N/A	E26	NO	16
L18CCE26U50K	COB 18W HID75 E26 50K		75	100-277	18	2700	85	5000K	5.7	2.3	N/A	E26	NO	16
100W LED HID														
L27CCE26U40K	COB 27W HID100 E26 40K		100	100-277	27	4050	85	4000K	6.5	2.3	N/A	E26	NO	16
L27CCE26U50K	COB 27W HID100 E26 50K		100	100-277	27	4050	85	5000K	6.5	2.3	N/A	E26	NO	16
175W LED HID														
L36CCE26U40K	COB 36W HID175 E26 40K		175	100-277	36	5400	85	4000K	7.9	3.3	N/A	E26	YES	16
L36CCE26U50K	COB 36W HID175 E26 50K		175	100-277	36	5400	85	5000K	7.9	3.3	N/A	E26	YES	16
200W LED HID														
L45CCE26U40K	COB 45W HID200 E26 40K		200	100-277	45	6750	85	4000K	9.1	3.3	N/A	E26	YES	16
L45CCE26U50K	COB 45W HID200 E26 50K		200	100-277	45	6750	85	5000K	9.1	3.3	N/A	E26	YES	16
L45CCEX39U40K	COB 45W HID200 EX39 40K	*	200	100-277	45	6750	85	4000K	9.2	3.3	N/A	EX39	YES	16
L45CCEX39U50K	COB 45W HID200 EX39 50K	*	200	100-277	45	6750	85	5000K	9.2	3.3	N/A	EX39	YES	16
250W LED HID														
L54CCEX39U40K	COB 54W HID250 EX39 40K	*	250	100-277	54	8100	85	4000K	9.5	3.3	7.87" x 7.87"	EX39	YES	16
L54CCEX39U50K	COB 54W HID250 EX39 50K	*	250	100-277	54	8100	85	5000K	9.5	3.3	7.87" x 7.87"	EX39	YES	16
300W LED HID														
L63CCEX39U40K	COB 63W HID300 EX39 40K	*	300	100-277	63	9450	85	4000K	9.7	3.5	7.87" x 7.87"	EX39	YES	16
L63CCEX39U50K	COB 63W HID300 EX39 50K	*	300	100-277	63	9450	85	5000K	9.7	3.5	7.87" x 7.87"	EX39	YES	16
320W LED HID														
L80CCEX39U40K	COB 80W HID320 EX39 40K	*	320	100-277	80	12000	85	4000K	9.6	5.1	9.84"x 9.84"	EX39	YES	6
L80CCEX39U50K	COB 80W HID320 EX39 50K	*	320	100-277	80	12000	85	5000K	9.6	5.1	9.84"x 9.84"	EX39	YES	6
400W LED HID														
L100CCEX39U40K	COB 100W HID400 EX39 40K	*	400	100-277	100	15000	85	4000K	10.2	5.1	9.84"x 9.84"	EX39	YES	6
L100CCEX39U50K	COB 100W HID400 EX39 50K	*	400	100-277	100	15000	85	5000K	10.2	5.1	9.84"x 9.84"	EX39	YES	6
500W LED HID														
L120CCEX39U40K	COB 120W HID500 EX39 40K	*	500	100-277	120	18000	85	4000K	11.1	5.1	9.84"x 9.84"	EX39	YES	6
L120CCEX39U50K	COB 120W HID500 EX39 50K	*	500	100-277	120	18000	85	5000K	11.1	5.1	9.84"x 9.84"	EX39	YES	6

* DLC qualified product at time of printing, consult designlights.org for the most up-to-date listing

Specifications



ITEM #	DESCRIPTION	DLC	HID WATT EQUIVALENT	VOLTAGE	WATTAGE	LUMENS	CRI	COLOR TEMP	MOL (inches)	DIA (inches)	MIN ENCLOSURE DIMENSION (INCHES)	BASE	HID REPLACEMENT LAMP ACCESSORIES	CASE QTY
LED HID Corn Cob Lamp Series - CCT Selectable														
54W LED HID CCT Selectable														
L54CCEX39UCCT	54W HID250 EX39 CCT	*	250	100-277	54	7560	85	30/40/50K	9.5	3.3	N/A	EX39	YES	16
LED HID Corn Cob Lamp Series - 277-480 VAC														
175W LED HID														
L36CCE26H40K	COB 36W HID175 E26 40K		175	277-480	36	5400	85	4000K	7.9	3.3	N/A	E26	NO	16
L36CCE26H50K	COB 36W HID175 E26 50K		175	277-480	36	5400	85	5000K	7.9	3.3	N/A	E26	NO	16
250W LED HID														
L54CCEX39H40K	COB 54W HID250 EX39 40K	*	250	277-480	54	8100	85	4000K	9.5	3.3	7.87" x 7.87"	EX39	NO	16
L54CCEX39H50K	COB 54W HID250 EX39 50K	*	250	277-480	54	8100	85	5000K	9.5	3.3	7.87" x 7.87"	EX39	NO	16
400W LED HID														
L100CCEX39H40K	COB 100W HID400 EX39 40K	*	400	277-480	100	15000	85	4000K	10.2	5.1	9.84"x 9.84"	EX39	NO	6
L100CCEX39H50K	COB 100W HID400 EX39 50K	*	400	277-480	100	15000	85	5000K	10.2	5.1	9.84"x 9.84"	EX39	NO	6
LED HID Corn Cob Lamp Series - Dark Sky														
L54HX39DS50K	LED 54W MH175 EX39 DS 50K		175	100-277	54	5900	>80	5000K	10.4	3.65	N/A	EX39	NO	16

* DLC qualified product at time of printing, consult designlights.org for the most up-to-date listing

ADAPTERS

Item Number	Description
ADAPTERE26E39	E26 TO E39 ADAPTER
ADAPTERE39E26	E39 TO E26 ADAPTER



ADAPTERE26E39



ADAPTERE39E26

HID REPLACEMENT LAMP ACCESSORIES

Item Number	Name	Description
LHSMW001	Microwave Motion Sensor	When connected to a lamp, provides Motion Detection through objects and walls
LHSIRO01	PIR Motion Sensor	When connected to a lamp, provides Motion Detection and Daylight Sensing
LHSDL001	Daylight Sensor	When connected to a lamp, provides Natural Light Detection
LHDW001	3 in 1 Dimming Wire	Use to connect lamps to an external 0-10V, PWM, and resistance dimming system

*See the HID Replacement Lamp Accessories Specification Sheet for more information.



LHSMW001



LHSIRO01



LHSDL001



LHDW001