



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



Delany LED Flush Mount MIDF Series

Features

Die-cast metal accents with a faceted white acrylic side diffuser.
Ideal use in kitchens, hallways, and anywhere general lighting is needed.
Provides lighting in residential, commercial and hospitality applications.
Fixture mounts to standard junction box (not included).

Construction

A 20-gauge steel pan made by stamping process and plated.
A side diffuser is made of 0.188" thick acrylic with inside sand blasted and painted off white with outside being grooved vertically and evenly spaced to create a prism effect. Standard mounting holes and hardware included.
Power supply connections must be made inside a junction box (not included).

Finish

Satin nickel pan and accents.

Diffuser

0.090" thick flat white acrylic on bottom.
0.188" thick round white acrylic on side.

Electrical

Input 120-277 VAC 60 Hz.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
TRIAC and ELV dimming only at 120VAC.

LED

Integrated LED modules capable of producing:
42W = 3200 source lumens
Adjustable Choice 3000K, 3500K, 4000K (CCT).
Rated for 50,000 Hrs. 90 CRI.


Certification

All fixtures are cETLus listed for indoor damp locations
Title 24/JA8 Compliant

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

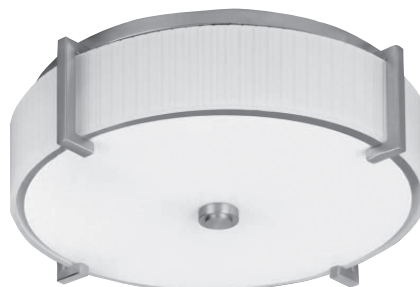

Ordering Information:

Satin Nickel	LED	Source Lumens	Adjustable CCT	DIA.	D
MIDF2232LAJUDSN	42W	3200	3000K/3500K/4000K	22-1/4"	5-1/2"