



Nolan LED Sconce NLS Series

Features

This Nolan LED sconce is a highly decorative style fixture providing beauty and light to any room. An excellent alternative solution to incandescent or CFL fixture with long lasting and energy saving LED technology. Ideal use for general lighting in indoor residential, commercial, and hospitality applications. Fixture must be mounted to a standard junction box (not included) on a wall. Available in multiple sizes and finishes.

Construction

A 22-gauge shallow metal pan is made by stamping process and plated. The front plate is 20-gauge steel with decorative metal trim and plated to provide a long lasting finish. The shade in shade design with clear outer acrylic and white inner diffuser. Fixture has an open top with white acrylic diffuser on bottom. Power supply connections must be made inside a junction box (not included).

Finish

Available in satin nickel or oakley bronze with clear lacquer finish.

Diffuser

White acrylic interior diffuser is .100" thick. Exterior clear acrylic diffuser is .100" thick. Distance between both diffusers and diffuser assembly is held by a plastic spacer at the bottom of the diffuser.

Electrical

Input 120-277 VAC 60 Hz. 0.14A at 120 VAC.
Compatible with residential (TRIAC/ELV) and commercial (0-10V) dimmers.
TRIAC and ELV dimming only at 120 VAC.

LED

Integrated LED modules capable of producing:
12" - 17W, 1400 source lumens
19" - 17W, 1400 source lumens
Adjustable Choice 3000K, 3500K, 4000K (CCT).
Rated for 50,000 Hrs. 90 CRI.

Certification

All fixtures are cETLus listed for indoor damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

Specifications and dimensions
subject to change without notice.

Ordering Information:

Satin Nickel	Oakley Bronze	LED	Source Lumens	Adjustable CCT	H	W	D	MC
NLS061214LAJUDSN	NLS061214LAJUDKB	17W	1400	3000K/3500K/4000K	12-5/8"	6-1/2"	3-7/8"	6-1/2"
NLS061914LAJUDSN	NLS061914LAJUDKB	17W	1400	3000K/3500K/4000K	19-1/2"	6-1/2"	3-7/8"	6-1/2"

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		



3in1 color temperature
3000K/3500K/4000K



12"



19"

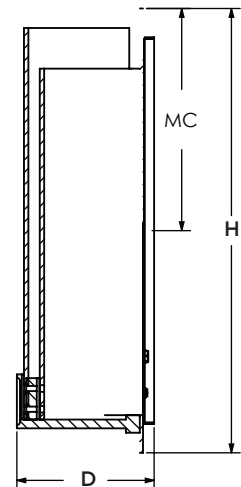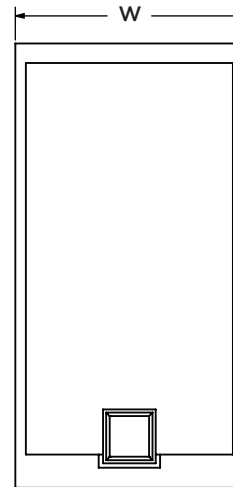

MC - Mounting Center