



Sloane SLL/SLF Series

Features

This low profile, clean appearance, surface mounted wrap provides a wide distribution of light. It can be used in various applications including offices, corridors, garages, kitchens and public spaces. Fixture mounts to standard junction box (not included).

Construction

Housing is die-formed of 22-gauge steel. Standard mounting holes are included. Power supply connections can be made inside the fixture wire way or in a junction box (not included).

Finish

Satin nickel or white frame finish.

Diffuser

White diffuser is made of engineered LED acrylic material.

Electrical

Direct wired with a constant current low voltage electronic LED driver rated at 120 VAC. The driver is dimmable with a 2-wire (Triac) or electronic low voltage (ELV) dimmer switch.

Lamping

Fixture includes LED modules capable of producing:
 15" - 18.5W, 1100 source lumens
 27" - 26W, 1800 source lumens
 50" - 39W, 3200 source lumens

Certification




cETLus listed for damp locations.
 *ENERGY STAR® qualified and Title 24 Listed.

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions subject to change without notice.

LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

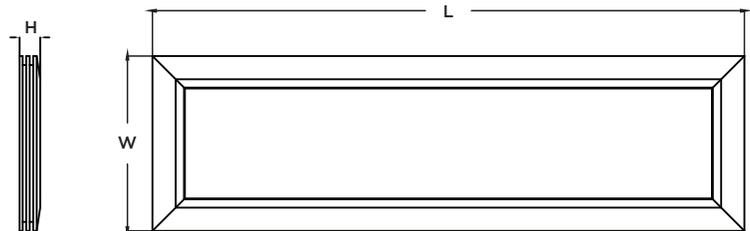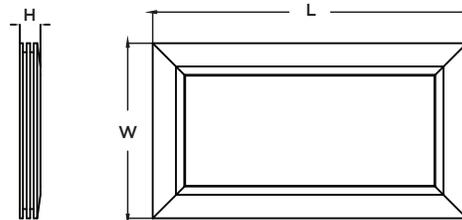

Ordering Information:

Satin Nickel	White	LED	Source Lumens	CCT	L	W	H
*SLF12121100L30DISN	SLF12121100L30D1WH	18.5W	1100	3000K	15"	15"	2"
*SLF12241800L30DISN	*SLF12241800L30D1WH	26W	1800	3000K	27"	15"	2"
*SLL12483200L30DISN	*SLL12483200L30D1WH	39W	3200	3000K	50-1/4"	15"	2"

Wall Dimmer Compatibility Chart

Product can be dimmed to 10% of full scale using a standard two-wire dimmer.

Brand	Model #
Lutron®	MACL-153M