



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

Zoe LED Sconce ZOS Series



Features

Simplistic cube design. Indirect light with wall wash effect. Ideal use in hallways, entrances or anywhere general lighting is needed. Provides lighting in residential, commercial and hospitality applications. Meets ADA requirements. Fixture mounts to standard junction box (not included).

Construction

Back plate is die-formed of 22-gauge steel. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

Finish

All metal parts are painted in White or Black

Diffuser

None

Electrical

D1 - Input 120 VAC / 60Hz.

MV - Input 120-277 VAC/ 60 Hz.

Compatible with residential TRIAC and ELV dimmers.

Lamping

Integrated LED modules capable of producing:
9W = 600 source lumens, 400 delivered lumens
3000K (CCT) rated for 50,000 hrs., 90 CRI.


Certification

All fixtures are cETLus listed for indoor damp locations.
ADA

Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

Specifications and dimensions
subject to change without notice.

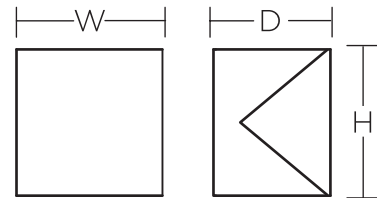

Ordering Information:

White	Black	LED	Source Lumens	Delivered Lumens	CCT	H	W	D
ZOS505600L30D1WH	ZOS505600L30D1BK	9W	600	400	3000K	5"	5"	4"
ZOS505600L30MVWH	ZOS505600L30MVBK	9W	600	400	3000K	5"	5"	4"