

EDGELINK 3000K

Low-Voltage LED Flat Panel

Super low-profile, 90+ CRI LED flat panel fixtures are available in four sizes with Warm White 3000K LED light. Link multiple panels with extension cables or connect directly with included in-line connectors to accommodate virtually any application. 15-100% Dimmable with most CL, ELV, and TRIAC dimmers and compatible power supplies.

- 3000K color temperature and 90+ CRI
- Edge-lit design and diffuse lens eliminate dotting
- 24V DC fixtures link up to 96 watts
- Available in four sizes: 8" / 16" / 22" / 34"
- Low profile design - less than 3/8" high
- Magnetic mounting plate for easy and quick installations
- Dimmable with most CL, ELV, and TRIAC dimmers
- cETLus Listed for dry locations




EDGELINK 3000K QUICK SPECS

SERIES	EDGE 3000K
LENGTH	8" / 16" / 22" / 34"
FINISH	White
VOLTAGE	24V
WATTAGE	7W / 13W / 19W / 24W
LUMENS	340 / 675 / 1000 / 1200
CCT OPTIONS	3000K
CRI	90+
MAX RUN	Dependant on driver (96W max)
DIMMING	15-100% CL, TRIAC when using DRJ driver; 15-100% ELV when using ELV driver; 5-100% (requires Trulux control+ receiver)
BEAM ANGLE	120
OPERATING TEMP	-10°C (14°F) to 70°C (158°F)
CERTIFICATIONS	cETLus Listed, Dry locations
RATED LIFE	35,000 Hours

*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.

EDGELINK 3000K QUICK SET-UP

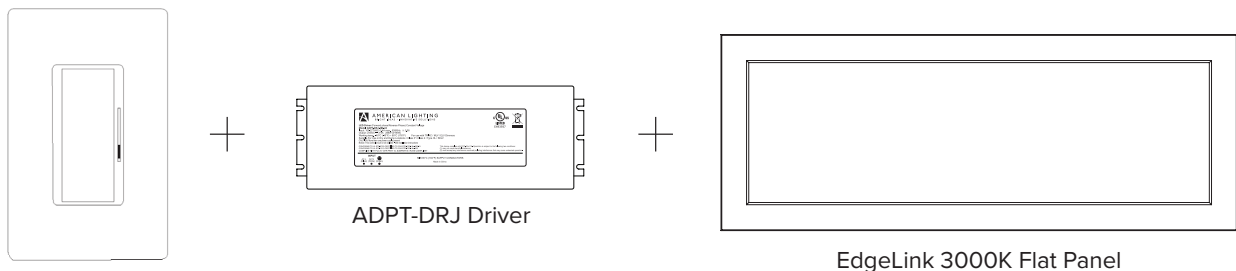

PROJECT: _____


TYPE: _____

LOCATION: _____


CATALOG NUMBER: _____



EDGELINK 3000K QUICK DIMENSIONS

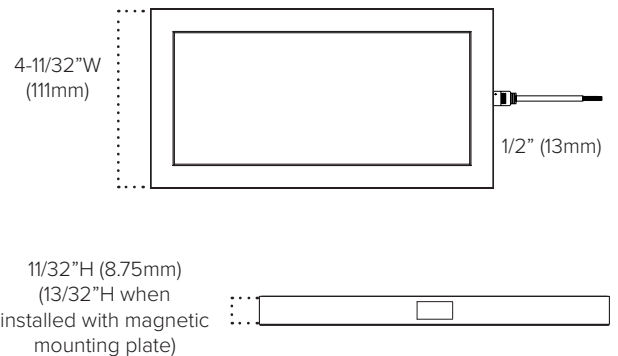

EDGE LINK 3000K QUICK TECH

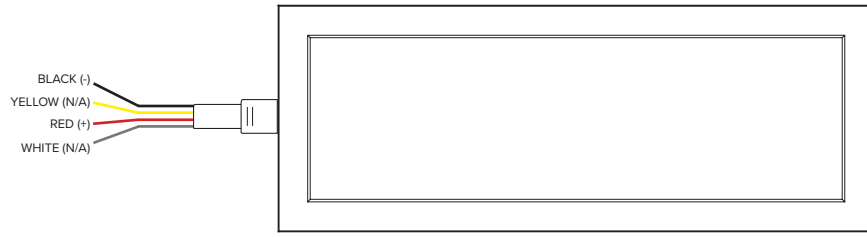

EDGE LINK 3000K FLAT PANEL


EDGE LINK 3000K ORDERING INFORMATION

ITEM NUMBER	CCT	LENGTH	LUMENS	WATTAGE	VOLTAGE	CRI	BEAM ANGLE	*DIMMING
EDGE-WW-8-WH	3000K	8"	340	7W	24V DC	90+	120	15-100% OR 5-100%
EDGE-WW-16-WH	3000K	16"	675	13W	24V DC	90+	120	15-100% OR 5-100%
EDGE-WW-22-WH	3000K	22"	1000	19W	24V DC	90+	120	15-100% OR 5-100%
EDGE-WW-34-WH	3000K	36"	1200	24W	24V DC	90+	120	15-100% OR 5-100%


EdgeLink fixtures include: (1) 6' 20AWG Power Connector Wire w/ tack nails, (1) End-to-end linking connector, (1) Magnetic mounting plate with mounting screws

EDGE LINK 3000K ACCESSORIES

ITEM NUMBER	DESCRIPTION
EDGE-CONKIT12	12' 20AWG Power Connector Wire
EDGE-EX6-WH	6" White EdgeLink extension cable
EDGE-EX12-WH	12" White EdgeLink extension cable
EDGE-EX24-WH	24" White EdgeLink extension cable



EDGE-CONKIT12



EDGE-EX

EDGE LINK 3000K CONTROL OPTIONS

ITEM NUMBER	DESCRIPTION
SRF-BATT	Trulux single color RF control; push dial wall mount; 1 zone; battery operated; Req's Trulux RF receiver
SRF-4Z-3P	Trulux single color RF control; touch slider wall mount; 1-4 zone; 12/24VDC input; Req's Trulux RF receiver
Trulux App	Trulux App Req. RF-WiFi-8 and REC-5A-4Z for 2-8 zones or REC-5A-4Z-WiFi for single zone
REC-5A-4Z	Trulux RF Receiver; sync multiple receivers to a single control; 4x5A channels; 12/24VDC input
REC-5A-4Z-WIFI	Trulux RF + WiFi receiver; sync multiple receivers to single control; 4x5A channels; 12/24VDC
WIFI-RF-8	TruHub WiFi Hub Control; converts WiFi to RF for 2-8 zones



SRF-BATT



Trulux App



REC-5A-4Z



SRF-4Z-3P



REC-5A-4Z-WIFI



WIFI-RF-8

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPT-DRJ-30-24	Adaptive Series 30W	30W / 3W	100-277V AC	24V	Yes*	6.49"L x 3.6"W x 1.02"H
ADPT-DRJ-60-24	Adaptive Series 60W	60W / 6W	100-277V AC	24V	Yes*	7.4"L x 3.6"W x 1.02"H
ADPT-DRJ-96-24	Adaptive Series 96W	96W / 9.6W	100-277V AC	24V	Yes*	8.66"L x 3.6"W x 1.61"H
ADPT-DRJ-192-24	Adaptive Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V	Yes*	10.94"L x 4.25"W x 1.8"H
ADPT-DRJ-288-24	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V	Yes*	11.85"L x 4.25"W x 1.8"H

Phase Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers