

EDGELINK TUNABLE

Low-Voltage Tunable CCT LED Flat Panel

Super low-profile flat panel fixtures available in four sizes featuring 2700K to 6000K color tuning capabilities with 90+ CRI, the Edgelink Tunable flat panels are perfect for the ultimate task or accent lighting applications needing to dial in the perfect color temperature or ambiance.

- 2700K to 6000K color tuning with 92+ CRI
- Edge-lit design and diffuse lens eliminate dotting
- 24V DC fixtures link up to 96 watts
- Available in four sizes: 8" / 16" / 22" / 34"
- Low profile design - less than 3/8" high
- Magnetic mounting plate for easy and quick installations
- Requires DMX controls for operation
- cETLus Listed for dry locations



PROJECT: _____

TYPE: _____

LOCATION: _____

CATALOG NUMBER: _____




EDGELINK TUNABLE QUICK SPECS


SERIES	EDGE TW
LENGTH	8" / 16" / 22" / 34"
FINISH	White
VOLTAGE	24V
WATTAGE	7W / 13W / 19W / 24W
LUMENS	340 / 675 / 1000 / 1200
CCT OPTIONS	2700K-6000K Tunable CCT
CRI	92+
MAX RUN	Dependant on driver
DIMMING	5-100% (requires Trulux control + receiver)*
BEAM ANGLE	120
OPERATING TEMP	-10°C (14°F) to 70°C (158°F)
AMBIENT TEMP	-10°C (14°F) to 40°C (104°F)
CERTIFICATIONS	cETLus Listed, Dry locations
RATED LIFE	35,000 Hours

*Minimum loads may apply. Per the NEC, switched wall outlets cannot be used with wall dimmers.


EDGELINK TUNABLE QUICK DIMENSIONS

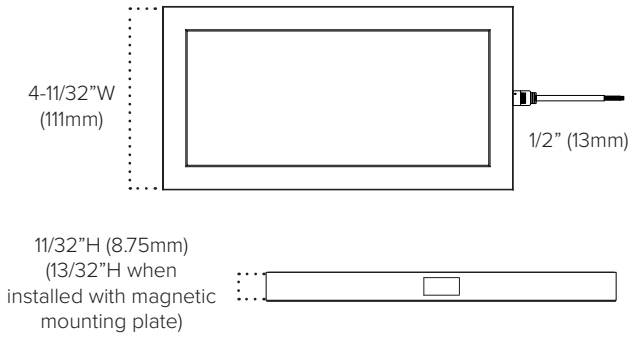

EDGELINK TUNABLE QUICK SET-UP

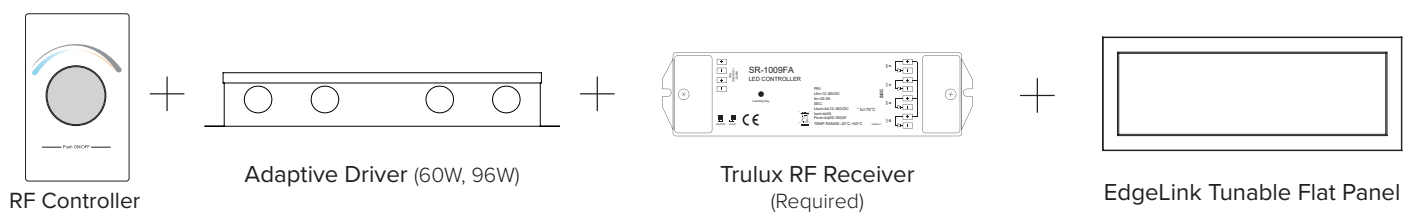

EDGE LINK TUNABLE QUICK TECH

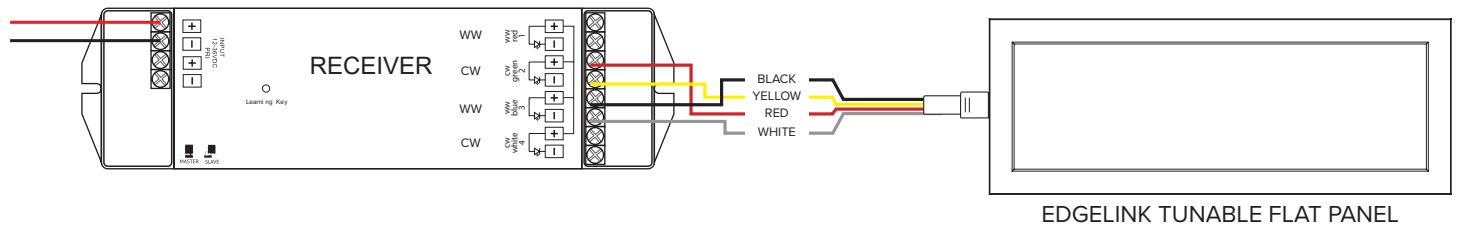


EDGE LINK TUNABLE ORDERING INFORMATION

ITEM NUMBER	CCT	LENGTH	LUMENS	WATTAGE	VOLTAGE	CRI	BEAM ANGLE	DIMMING
EDGE-TW-8-WH	2700K-6000K	8"	340Lm	7W	24V DC	88/92+	120	5-100%
EDGE-TW-16-WH	2700K-6000K	16"	675Lm	13W	24V DC	88/92+	120	5-100%
EDGE-TW-22-WH	2700K-6000K	22"	1000Lm	19W	24V DC	88/92+	120	5-100%
EDGE-TW-34-WH	2700K-6000K	34"	1200Lm	24W	24V DC	88/92+	120	5-100%

EdgeLink fixtures include: (1) 6' 20AWG Power Connector Wire w/ tack nails, (1) End-to-end linking connector, (1) Magnetic mounting plate with mounting screws

EDGE LINK TUNABLE ACCESSORIES

ITEM NUMBER	DESCRIPTION
EDGE-CONKIT12	12' 20AWG Power Connector Wire
EDGE-EX6-WH	6" White EdgeLink extension cable
EDGE-EX12-WH	12" White EdgeLink extension cable
EDGE-EX24-WH	24" White EdgeLink extension cable
WIRE-CMP-100-6PIN	100ft (16/6) In-wall Rated Wire Spool
INLINE-TW-CTRL	Simple Select In-line Controller (Tunable CCT)
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

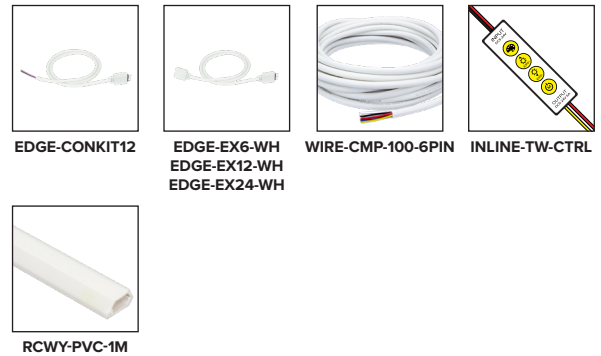

RECOMMENDED POWER SUPPLIES

ITEM NUMBER	DESCRIPTION	MAX / MIN LOAD	INPUT VOLTAGE	OUTPUT VOLTAGE	DIMMABLE	DIMENSIONS
ADPT-DRJ-30-24	Adaptive Series 30W	30W / 3W	100-277V AC	24V	Yes*	6.49"L x 3.6"W x 1.02"H
ADPT-DRJ-60-24	Adaptive Series 60W	60W / 6W	100-277V AC	24V	Yes*	7.4"L x 3.6"W x 1.02"H
ADPT-DRJ-96-24	Adaptive Series 96W	96W / 9.6W	100-277V AC	24V	Yes*	8.66"L x 3.6"W x 1.61"H
ADPT-DRJ-192-24	Adaptive Series 192W (2 x 96W)	192W / 19.2W	100-277V AC	24V	Yes*	10.94"L x 4.25"W x 1.8"H
ADPT-DRJ-288-24	Adaptive Series 288W (3 x 96W)	288W / 28.8W	100-277V AC	24V	Yes*	11.85"L x 4.25"W x 1.8"H

Phase Dimming Compatible With Most MLV, ELV, and TRIAC Dimmers



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.