

FORA 3-CCT SERIES 120V Security Light with PIR Motion Sensor

The Fora series takes a more modern approach to security and landscape lighting. Featuring sleek adjustable fixture heads, the Fora series produce up to 1700 lumens with three selectable color temperatures ranging from a 3000K warm white, up to 5000K daylight setting.

- Selectable 3-CCT: 3000K / 4000K / 5000K
- Up to 1700 lumen output performance .
- Die-cast aluminum housing
- 120V AC input No driver needed
- Features integrated motion sensor •
- Fully adjustable pivot head design •
- Available in black and white finishes
- cETLus Listed, IP65 (wet location)
- 35,000 hours rated life



FORA SERIES QUICK SPECS

VOLTAGE	120V AC			
WATTAGE	20W			
LUMENS	1450-1700Lm			
CCT OPTIONS	3-CCT 3000K / 4000K / 5000K			
CRI	80+			
MOUNTING	Surface mount			
DIMMING	Non-Dimmable			
BEAM ANGLE	99°			
OPERATING TEMP	-20°C (-4°F) to 40°C (104°F			
CERTIFICATIONS	cETLus Listed - Wet Location			
RATED LIFE	35,000 Hours			

PROJECT:
TYPE:
LOCATION:

CATALOG NUMBER:






FORA SERIES ORDERING INFORMATION

ITEM NUMBER	DESCRIPTION	FINISH	VOLTAGE	ССТ	CRI	LUMENS	WATTAGE	DIMMING
FL2-3CCT-BK	Fora Flood Light	Black	120V AC	3CCT	80+	1450Lm	20W	Non-Dimmable
FL2-3CCT-WH	Fora Flood Light	White	120V AC	3CCT	80+	1700Lm	20W	Non-Dimmable

📉 AMERICAN LIGHTING

FORA SERIES QUICK DIMENSIONS

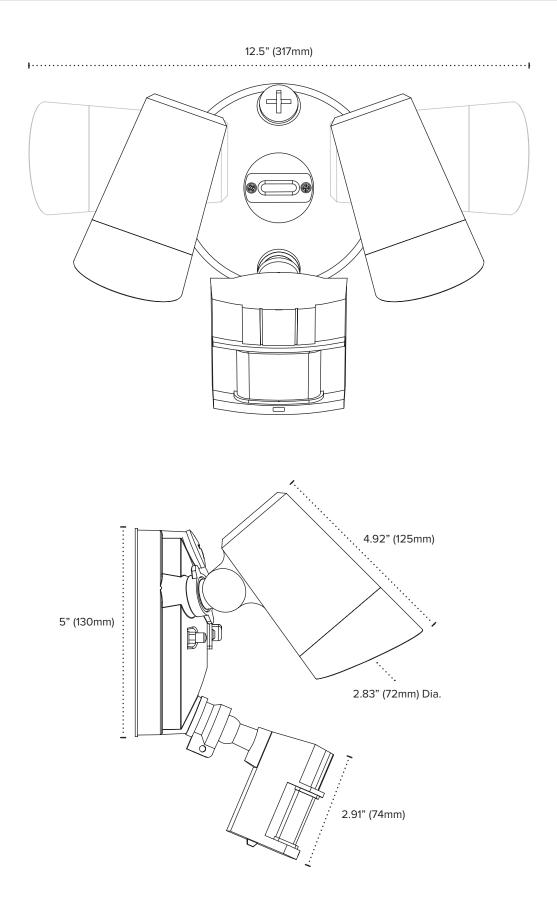

AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 3 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.