

STANDARD GRADE KIT

24V DC Standard Grade - 5M Kit

Standard Grade tape light kits provide the components for a complete Trulux Lighting System. As the entry-level tape light grade in the Trulux line, Standard grade offers a modest amount of lumens while staying highly energy efficient. This convenient kit is ideal for accent lighting applications such as toe-kick lighting or above cabinet lighting.

- Ready to install kit with plug & play connection
- Features handheld remote for easy on/off operation with built-in presets
- 2700K or 3000K color temps with 96+ CRI
- Up to 150Lm per foot consuming 2.19W per foot
- Tape light is cuttable every 6.56 inches
- Each tape light kit has a maximum run of 16.4 feet
- Additional tape light accessories included for easy installation
- cULus Listed (dry location)



PROJECT: _____

TYPE: _____

LOCATION: _____

CATALOG NUMBER: _____




STL SERIES KIT QUICK SPECS

VOLTAGE	24V DC
WATTAGE	2.19W / ft
LUMENS	Up to 150Lm / ft
CCT OPTIONS	2700K / 3000K
CRI	96+
MAX RUN	32.8 ft
CUTTING POINTS	6.56" (166.6mm)
IP RATING	IP54 - Damp Location
DIMMING	PMW (5-100%)
DIMENSIONS	0.39" (10mm) W x 0.06" (1.65mm) H
BEAM ANGLE	120°
CERTIFICATIONS	cULus Listed / JAB Compliant
RATED LIFE	50,000 Hours



STL SERIES KIT QUICK LOOK

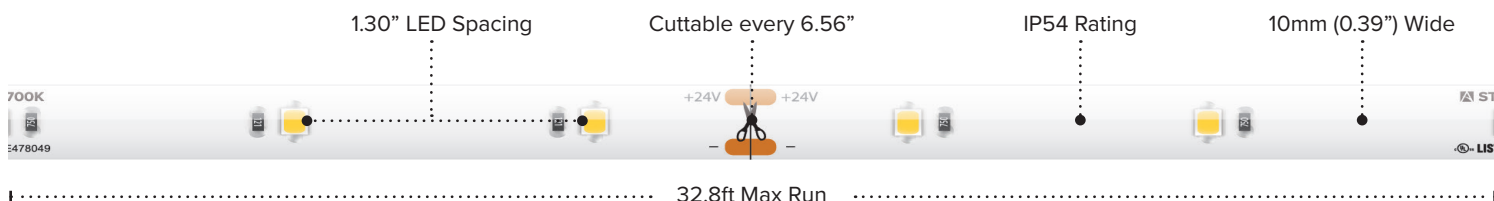


STL SERIES KIT ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING	MAX RUN
STL-UWW-5MKIT	24V	2700K	16.4 ft	146Lm / ft	2.19W / ft	IP54	96+	3.94" (100mm)	32.8 ft
STL-WW-5MKIT	24V	3000K	16.4 ft	150Lm / ft	2.19W / ft	IP54	96+	3.94" (100mm)	16.4 ft




STL-UWW-5MKIT and STL-WW-5MKIT includes: (1) 24V Plug-in Power Supply / (1) 15ft (20/2) Wire Spool / (1) In-line RF Receiver / (1) Handheld Remote / (6) HD Power Feeds / (3) HD Splice Connectors

STL SERIES KIT QUICK SET-UP

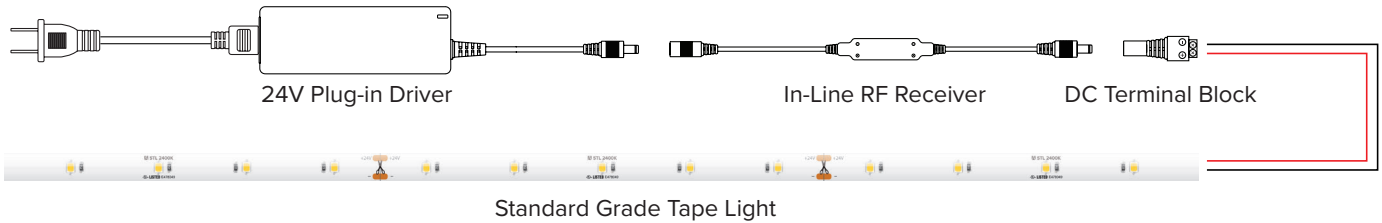

SINGLE COLOR ACCESSORIES

ITEM NUMBER	DESCRIPTION
TL-CONKIT	Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6" HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
WIRE-15-2PIN	15ft (20/2) Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
LVS-2PIN	In-line Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

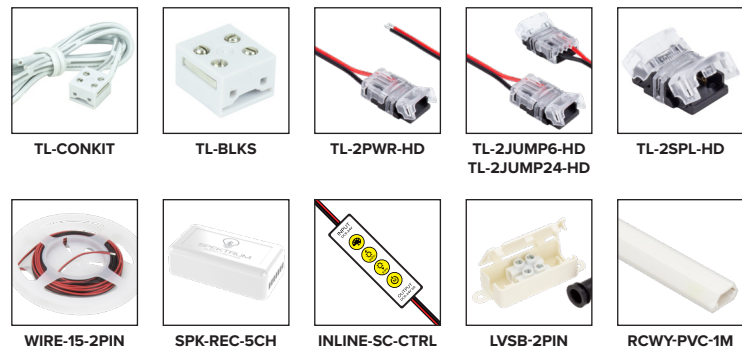



AMERICAN LIGHTING WARRANTY

LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit www.americanlighting.com. Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary.

LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.