

**LED**  
TECHNOLOGY

50,000 Hours Life, 40Watt, 120-277VAC

### Applications:

Ceiling, T-Bar Drop Ceiling, Troffer Replacement

### Features:

- Low Profile Design.
- Non-Corrosive Powder Coated Steel Body.
- Flush Door Frame With Acrylic Lens.
- 120~277 Volt.
- Includes Earth Quake Clips
- Can be Installed with Backup Batteries.  
(Sold Separately)

### Accessories:


Battery Backup




### Specification:

Input Line Voltage:	120-277VAC
Input Power	40W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-20°C
Maximum Operating Temp	40°C
CCT	4000K
CRI	≥80
Lumens	4100
CBCP	1749
Power Factor	<0.90
THD	10%
Dimmable	10% 0~10V

DRIVER: Constant-current LED power supply.

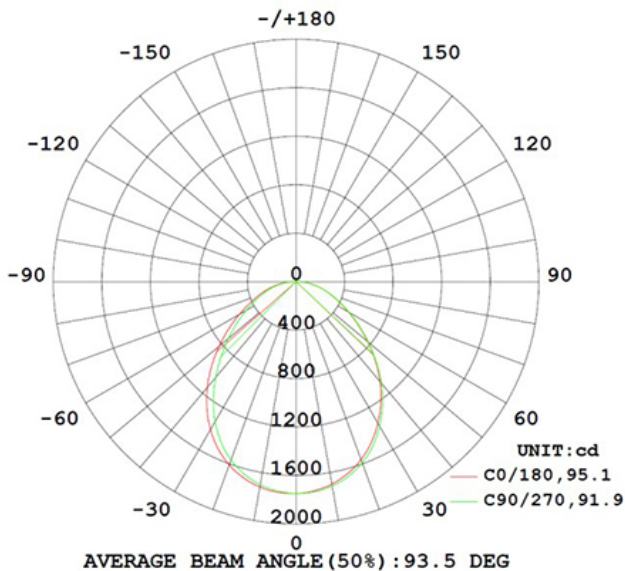

Fixture Size:  
BD23.82"xGD23.81"xH2"

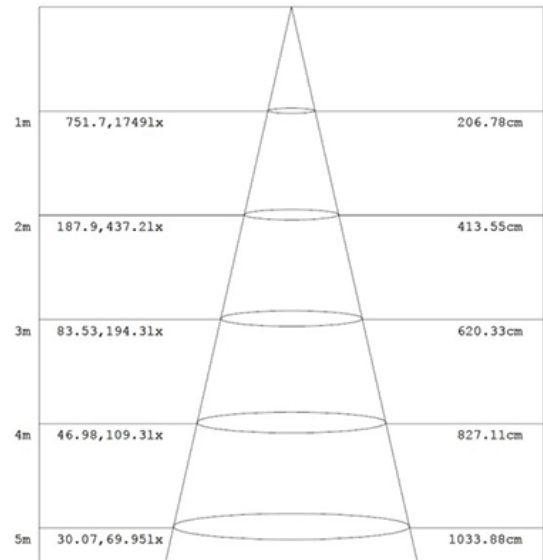

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

**WARRANTY**  
5-YEAR \*

Model:#	Description	wattage	lumens
CL40TF22-D/840	40 Watt LED Direct Troffer Cool White	40W	4100

\* 5 Year Limited Warranty

UPC: 680596-58282-3

Cyber Tech Lighting, Inc.  
331 S. Hale Ave. Fullerton, CA 92831 USA.  
Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795  
www.cybertechlighting.com

