

High Performance 2'x4' Direct Troffer



50,000 Hours Life, 45Watt, 120-277VAC

Applications:

Ceiling, T-Bar Drop Ceiling, Troffer Replacement


Features:

- Low Profile Design.
- Non-Corrosive Powder Coated Steel Body.
- Flush Door Frame With Acrylic Lens.
- 120~277 Volt.
- Includes Earth Quake Clips
- Can be Installed with Backup Batteries. (Sold Separately)

Accessories:





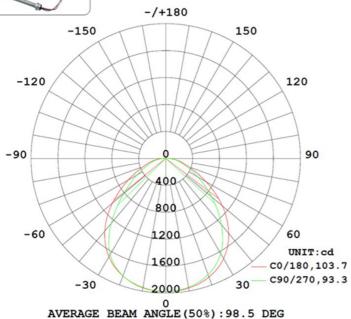


Fixture Size: BD47.44"xGD23.81"xH2"



Specification:

Input Line Voltage:	120-277VAC
Input Power	45W
Input Line Frequency	60Hz
Lamp Life (Rated)	
Maintenance Charatter or Tanana	-20°C
Maximum Operating Temp	40°C
ССТ	
CRI	
Lumens	4400
CBCP	40-0
Power Factor	<0.90
THD	10%
Dimmable	10% 0~10V

DRIVER: Constant-current LED power supply.



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance

WARRANTY	
5-YEAR	*

Model:#	Description	wattage	lumens
CL45TF24-D/840	45 Watt LED Direct Troffer Cool White	45W	4800

* 5 Year Limited Warranty



UPC: 680596-58283-0

