

LED TECHNOLOGY

50,000 Hours Life, 165/150/130Watt, 120-277VAC

Applications:

Commercial & Industrial High Bay Application

Features:

- Adjustable 165/150/130W
- Adjustable CCT 4000K&5000K
- Slim Design
- Non-Corrosive Powder Coated Steel Body
- Damp Location
- Steel Hanging Cable Included
- Dimmable down to 10%
- Accessories Sold Separately

Accessories:

Battery Backup




Add (BK) at end of model when ordering

Motion Sensor




Sold Separately HL-MS

Luminous Intensity Distribution Curve

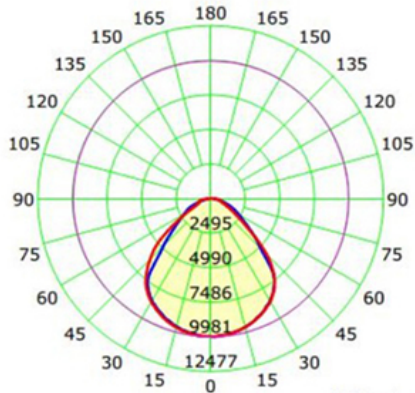

23.98"

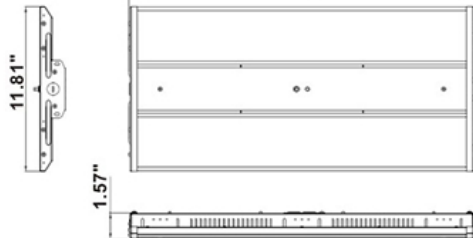

ADJUSTABLE LIGHT COLOR

4000K
COOL WHITE
5000K
DAY LIGHT

ADJUSTABLE WATT

165 WATTS	23,100 LUMENS
150 WATTS	21,000 LUMENS
130 WATTS	18,200 LUMENS



Specification:

Input Line Voltage:	120-277VAC
Input Power	165/150/130W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C
Maximum Operating Temp	40°C
CCT	4000K/5000K
CRI	≥80
Lumens	23100/21000/18200
CBCP	9981
Power Factor	>0.90
THD	10%
Dimmable	10% 0~10V

DRIVER: Constant-current LED power supply.

Illuminance at a Distance(Field Angle)

Dist(m)	Enadir(lx)	Dh/Dv	F(m)	S F(sq.m)	Eav F(lx)
1.0	9944.95	6.66/4.94	39.6	134.07	
2.0	2486.24	13.31/9.89	158.5	33.52	
3.0	1104.99	19.97/14.83	356.6	14.90	
4.0	621.56	26.62/19.77	633.9	8.38	
5.0	397.80	33.28/24.72	990.5	5.36	
6.0	276.25	39.93/29.66	1426.3	3.72	
7.0	202.96	46.59/34.61	1941.4	2.74	
8.0	155.39	53.24/39.55	2535.7	2.09	
9.0	122.78	59.90/44.49	3209.2	1.66	
10.0	99.45	66.55/49.44	3962.0	1.34	

Dh/Dv Beam Angle(B): H89.8 V97.2 Field Angle(F): H146.5 V135.9

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

5-YEAR *

Model:#	Description	wattage	lumens
HL165S/CCT	165Watt LED Linear High Bay 2CCT	165/150/130W	23100/21000/18200

* 5 Year Limited Warranty

UPC: 68059658346-2

Cyber Tech Lighting, Inc.

331 S. Hale Ave. Fullerton, CA 92831 USA.

Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795

www.cybertechlighting.com

