

LED
TECHNOLOGY

50,000 Hours Life, 220Watt, 120-277VAC

Applications:


Commercial & Industrial High Bay Application

Features:

- Slim Design
- Non-Corrosive Powder Coated Steel Body
- Damp Location
- Steel Hanging Cable Included
- Dimmable down to 10%
- Accessories Sold Separately

Accessories:

Battery Backup

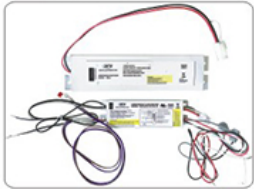



Add (BK) at end of model when ordering

Motion Sensor



Sold Separately HL-MS

Luminous Intensity Distribution Curve

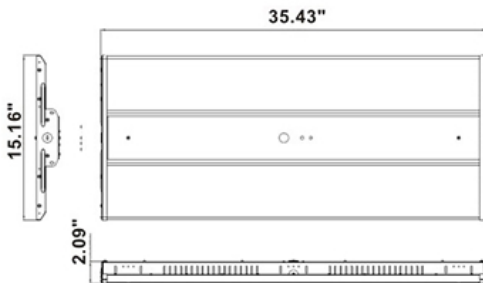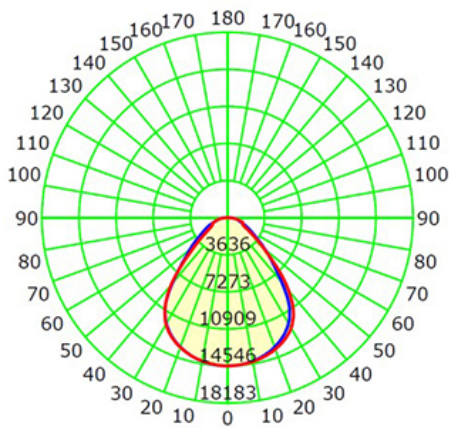

Specification:

Input Line Voltage:	120-277VAC
Input Power	220W
Input Line Frequency	60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C
Maximum Operating Temp	40°C
CCT	5000K
CRI	≥80
Lumens	29,800
CBCP	14546
Power Factor	>0.90
THD	10%
Dimmable	10% 0~10V

DRIVER: Constant-current LED power supply.

Height	Avg./Nadir, E	Beam Angle:84.8°	Diameter / Area
1.0m	7379.33/ 14536.76lx		1.83m / 2.62sq.m
2.0m	1844.83/ 3634.19lx		3.65m / 10.48sq.m
3.0m	819.93/ 1615.20lx		5.48m / 23.58sq.m
4.0m	461.21/ 908.55lx		7.31m / 41.91sq.m
5.0m	295.17/ 581.47lx		9.13m / 65.49sq.m
6.0m	204.98/ 403.80lx		10.96m / 94.31sq.m
7.0m	150.60/ 296.67lx		12.78m / 128.36sq.m
8.0m	115.30/ 227.14lx		14.61m / 167.66sq.m
9.0m	91.10/ 179.47lx		16.44m / 212.19sq.m
10.0m	73.79/ 145.37lx		18.26m / 261.97sq.m

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

WARRANTY

5-YEAR *

Model:#

HL220S/850

Description

220 Watt LED Linear High Bay 5000K

wattage

220W

lumens

29800

* 5 Year Limited Warranty

UPC: 80680215389-6

Cyber Tech Lighting, Inc.

331 S. Hale Ave. Fullerton, CA 92831 USA.

Tel: 714-870-0794, 1-877-60CYBER Fax: 714-870-0795

www.cybertechlighting.com

