

LED
TECHNOLOGY

25,000 Hours Life, 10 Watt, 120VAC

Applications:

Track Lighting, Spot Lighting, Display Lighting, Recessed Can, Indoor or Outdoor Wet Locations Use



Features:


- Replace halogen PAR 30 lamps and save 80% energy (75watt equivalent)
- Instant bright, high power LED bulb
- Rated life of 25,000 Hr can be exceeded when operated on dimmed level, smooth dimming to 10% or below
- Dims on most standard household dimmers
- High efficacy 90cri true color



Specification:

Input Line Voltage:	120VAC
Input Power	10W
Input Line Frequency	60Hz
Lamp Life (Rated)	25,000hrs
Minimum Starting Temp	-20°C/-4°F
Maximum Operating Temp	40°C/104°F
CCT	3000K/5000K
CRI	≥90
Lumens	800/800
CBCP	689
Beam Angle	40°
Dimmable	Standard Triac Dimmer

Luminous Intensity Distribution Curve

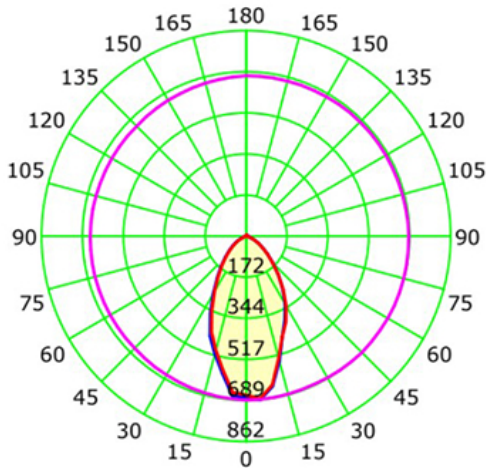


Average Diffuse Angle(50%): 55.1° Unit: cd

— C0-C180 — C90-C270 — G5



WARRANTY
1-YEAR *

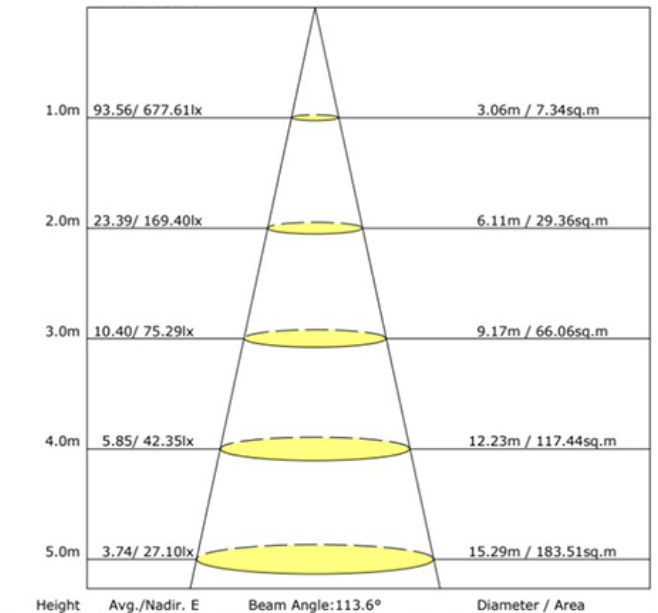

Note: The curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

Model:#	Description	wattage	lumens	base
LB75PAR30-D/WW	10Watt PAR30 Narrow Flood Lamp Warm White, Damp Location, Title20	10W	800	E26
LB75PAR30-D/DL	10Watt PAR30 Narrow Flood Lamp Day Light, Damp Location, Title20	10W	800	E26

* 1 Year Limited Warranty

UPC: LB75PAR30-D/WW 793573-526281
LB75PAR30-D/DL 680596-582458
Wet Location Lamp

