


LED
TECHNOLOGY

50,000 Hours Life, 100 Watt, 120-277VAC 50/60Hz

Applications:

Parking Lots, Security Lighting, Pole, Post Mount, Auto Dealerships, Walkways, Roadways, Facade Lighting, Grocery Stores.

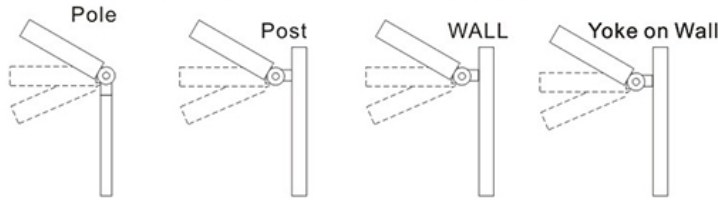

Optional Mounts Available

Features:

- Replace 300W MH Unit
- Suitable For Wet Location(IP65) Aluminum Rust Proof Body
- Adjustable Up/Down with Any Arm/Fitter
- Type 3 Light Distribution Pattern
- Accessories Sold Separately

Accessories:

LWP-SBA-SF
Slip Fitter

LWP-SBA-WPM
Pole Mount/Wall Mount

LWP-SBA-YM
Yoke Mount




Motion Sensor

Photocell





Note: Driver cover plate is changed when motion sensor is added

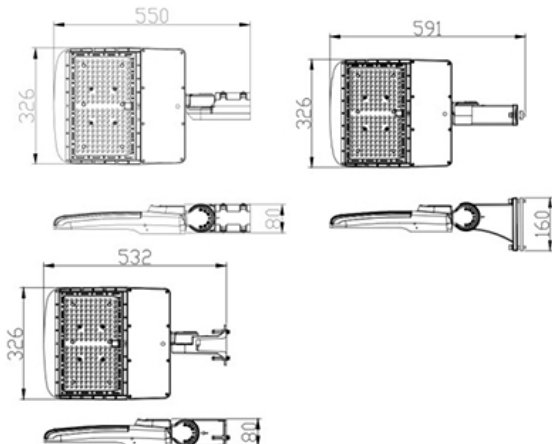

Specification:

Input Line Voltage	120-277VAC
Input Power	100W
Input Line Frequency	50/60Hz
Lamp Life (Rated)	50,000hrs
Minimum Starting Temp	-40°C/-40°F
Maximum Operating Temp	46°C/115°F
CCT	5000K
CRI	70
Lumens	13163
Dimmable	1-10V
EPA	1.89ft ²

Luminous Intensity Distribution Curve

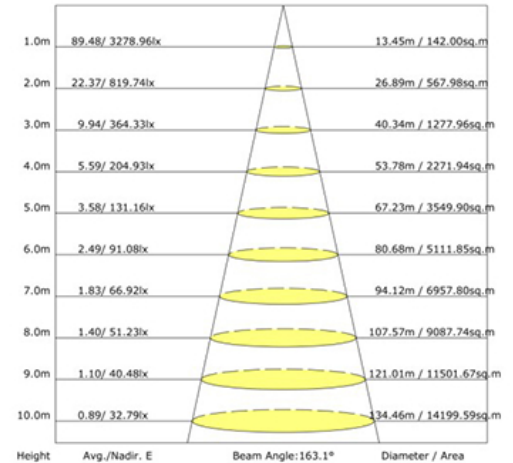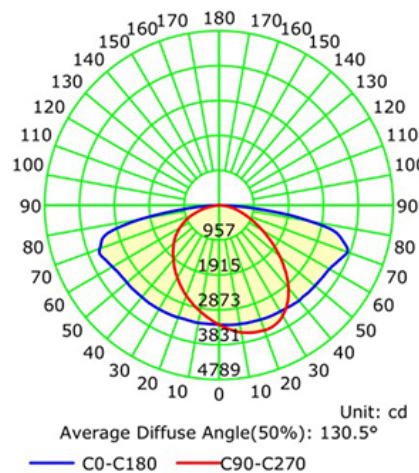

Model:#	Description	Wattage	Metal Halide Equivalent	Lumens
LWP100SB/850	100 Watt LED Area Light Bronze Finish, Day Light	100W	300W	13163

DLC 5.1

*5 Year Limited Warranty

