

## LED TECHNOLOGY

50,000 Hours Life, 29 Watt, 100/277VAC 50/60Hz

### Applications:

Pathway, Wall, Security, Walkways, and Perimeter Lighting, Entryways.


### Features:

- Included Dawn to Dusk Sensor
- 100/277 Dual Voltages
- Aluminum Rust Proof Body
- UL Listed. Suitable for Wet Location
- Replaces 75/100W Metal Halide
- Bronze, Power Coat Finish
- Polycarbonate Lens with UV Stabilization
- Instant Start Electronic Unit
- Auto on: Dusk-To-Dawn Photocell
- Photocell Quick Disconnect





### Specification:

Input Line Voltage:	100/277VAC
Input Power:	29W
Input Line Frequency:	50/60Hz
Luminaire Life (Rated):	50,000hrs
Minimum Starting Temp:	-40°C/-40°F
Maximum Operating Temp:	45°C/113°F
CCT:	5000K
CRI:	≥80
Lumens:	3625
CBCP:	1769

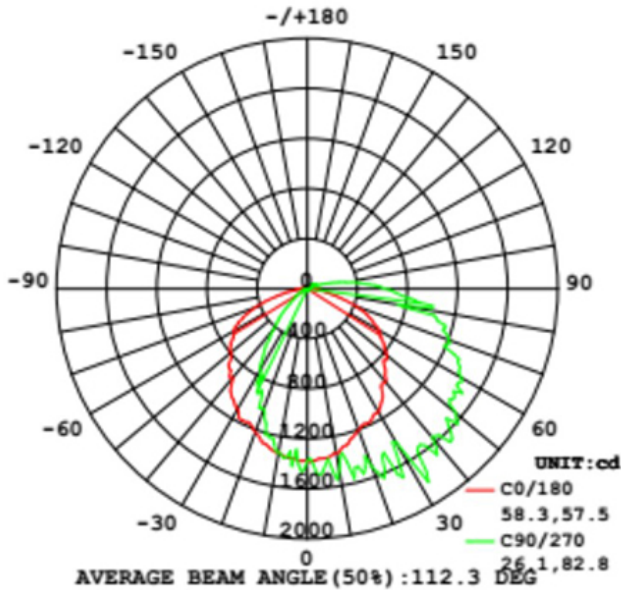

Height	Avg, Emax	Angle: 96.31deg	Diameter
1m	555.5, 1502lx		223.34cm
2m	138.9, 375.5lx		446.69cm
3m	61.73, 166.9lx		670.03cm
4m	34.72, 93.87lx		893.37cm
5m	22.22, 60.07lx		1116.71cm
6m	15.43, 41.72lx		1340.06cm
7m	11.34, 30.65lx		1563.40cm
8m	8.680, 23.47lx		1786.74cm
9m	6.858, 18.54lx		2010.08cm
10m	5.555, 15.02lx		2233.43cm

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.



Weight: 3.75lb

**WARRANTY**  
\* 5-YEAR

Model:#	Description	wattage	lumens
LWP30FHZ-BZ/850	29Watt Hard Wire LED Light Bronze Body, W/Dawn to Dusk Sensor, Day Light	29W	3625

\* 5 Year Limited Warranty

UPC: 80680215462-6

