


DF-LED7756

POST TOP FIXTURE



Slipfitter Included

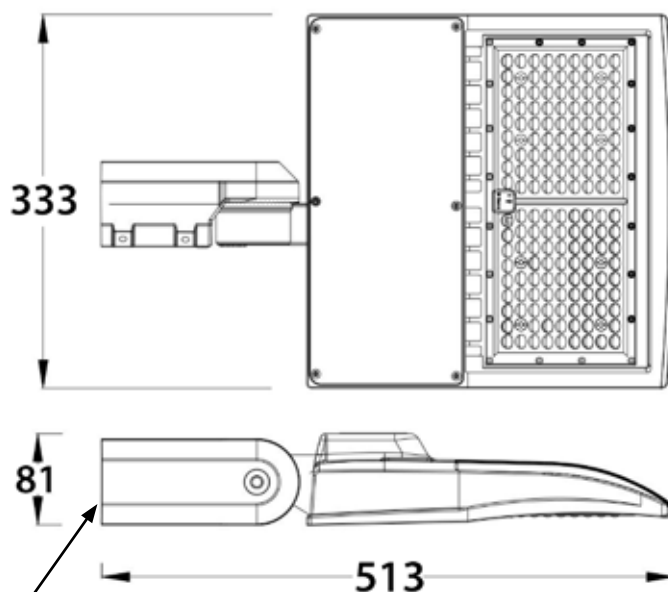


65.60 mm
2.58"
(I.D.)

- ▶ **Material:** Powder Coated Cast Aluminum
- ▶ **Lens:** Clear, Polycarbonate (TYPE 5)
- ▶ **Available Finish:** Black, Verde Green
- ▶ **Color Temperature:** 4000K
- ▶ **Lumens:** 10,000 Lm
- ▶ **0 - 10V Dimming Standard**
- ▶ **UL Listed**

MODEL NUMBER	LENS TYPE	LAMP TYPE	ILLUMINANT TYPE	WATTS (W)	VOLTS (V)	LAMP(S) INCLUDED?
DF-LED7756D-T3	TYPE 3	SMD LED	LED	80	100-277	YES
DF-LED7756D-T4	TYPE 4	SMD LED	LED	80	100-277	YES
DF-LED7756D-T5	TYPE 5	SMD LED	LED	80	100-277	YES

Overall Dimensions:
20.19"H x 13.11"W x 3.19"D

Weight: 12 lbs
Approximate Wire Length: N/A
Box Dimensions:

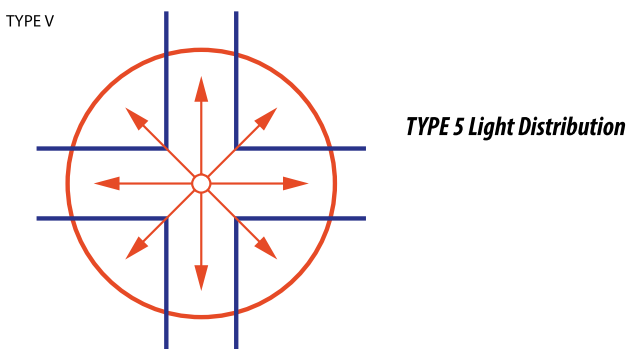

DF-LED7756




Photometric Results


IES Classification: Type V
 Total Rated Lamp Lumens: 10554.3 lm
 Efficiency: 100%
 Upward Ratio: 0%
 Central Intensity: 1181.99 cd
 Pos of Max. Intensity: H45 V78

Longitudinal Classification: Medium
 Measurement Flux: 10554.3 lm
 Downward Ratio: 100%
 Luminaire Efficacy Rating (LER): 129.25
 Max. Intensity: 2942.43 cd

Luminous Intensity Distribution Curve

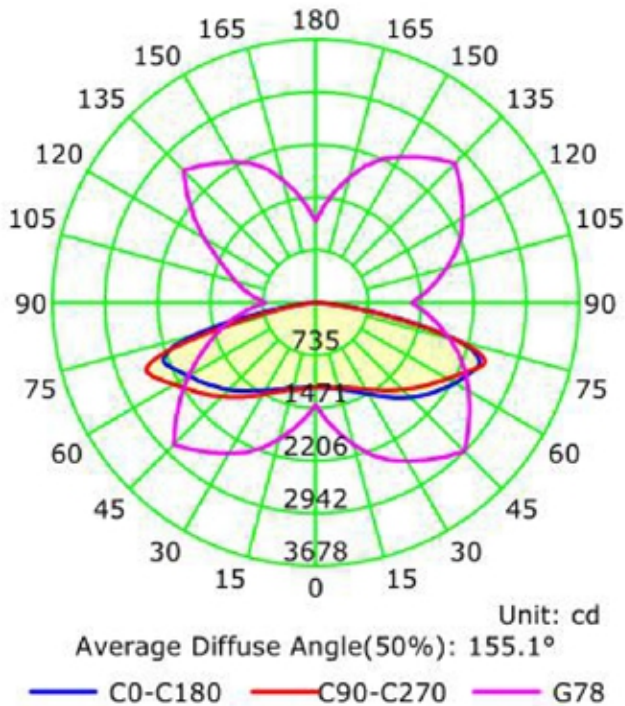

The Average Illuminance Effective Figure

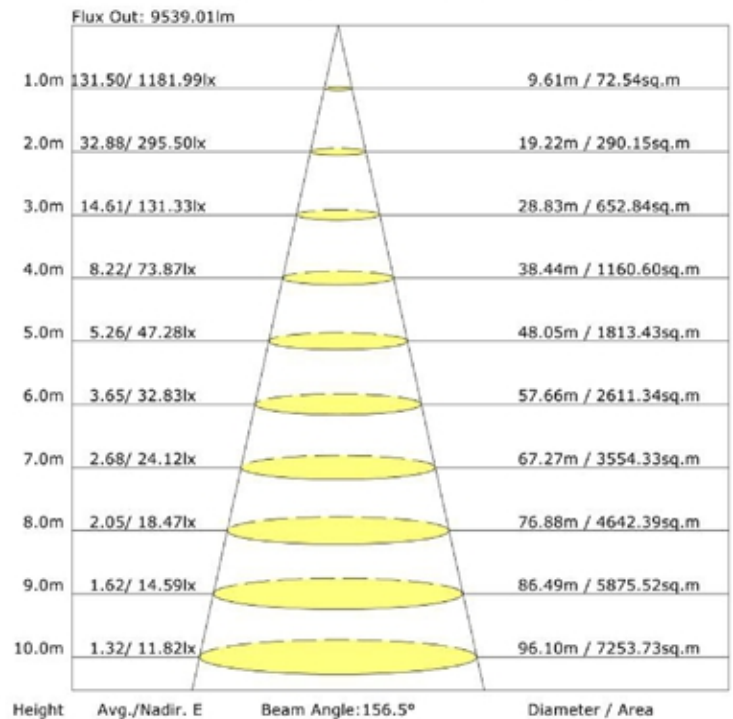

DABMAR LIGHTING INCORPORATED

320 Graves Ave . Oxnard, CA 93030 . 805.604.9090 . f: 805.604.9050 . www.dabmar.com
 4693 19th Street Ct E . Bradenton, FL 34203