




## ILSCO SOLAR® SGB SOLAR GRND BND

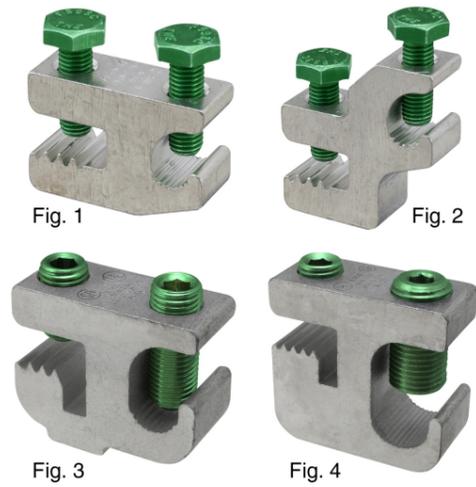

- Manufactured from high strength 6061-T6 aluminum alloy.
- Electro-tin plated.
- UL 467 Listed for grounding and bonding. UL File E34440
- SGB-4 and SGB-5 UL 2703 Recognized. UL File E354420
- Green color, universal to identify ground aids in visual inspection.
- Stainless steel hardware for corrosion resistance, greater torque and ease of installation.
- Serrations in conductor wire way cuts oxidation.
- Lay-in feature.
- Suitable for use with either copper or aluminum.
- Provides low contact resistance.
- 1/4" max frame thickness to mount to solar panel frames.
- Tested to ASTM B117-09 for operating in a salt spray (fog) environment.

Item ID	Figure Number	Hex Size	Ground Conductor Range	Standard Package Quantity	NAED/UPC Number
SGB-4	1	7/16	4-14 SOL-STR	50	0783669960259
SGB-5	2	7/16	4-14 SOL-STR	50	0783669960303