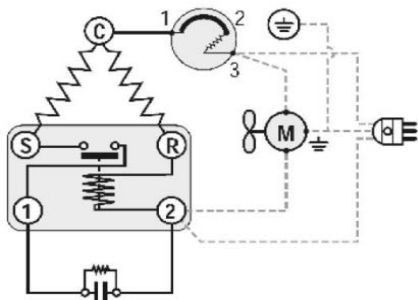
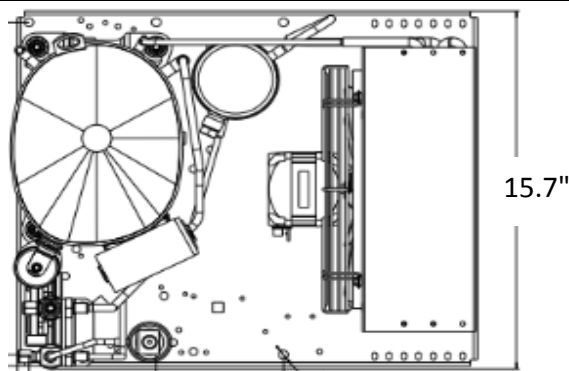
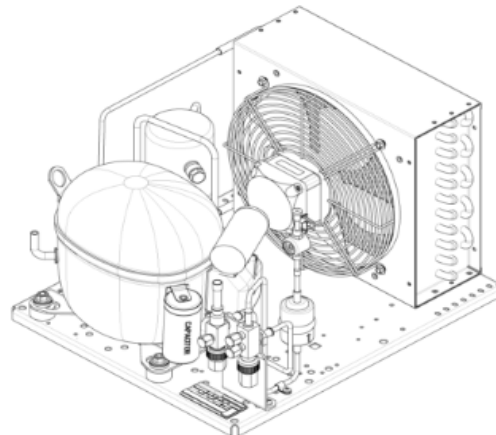
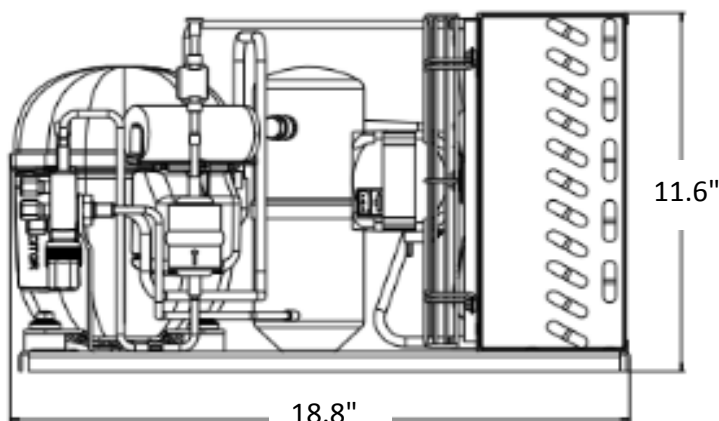


embraco**UNT6215ZV2****MBP/HBP****208-230****134A****Wiring Diagram****Weight: 57.8 lb****Technical Specifications**

Rev 11-2017

Mechanical Data

Approximate H.P.	1/2+
Starting torque	HST
Refrigerant	134A
Evap. Temp. Range	5° to 50°F
Oil charge	15.22 oz.
Oil type	POE
Viscosity	ISO22

Electrical Data

Compressor	CSIR
Voltage	208-230/60Hz
Voltage range	187-244V
Run winding resistance at 25° C	2.52 Ω
Start winding resistance at 25° C	7.55 Ω
Locked rotor current	20.8 amps
FLA: 60Hz	4.9 amps

MBP-Performance-ASHRAE

Temperature - F	20
Capacity - BTU/Hr	3,867
Power - W	678.8
Current - Amps	8.59
Temperature - C	-6.7
Capacity - Kcal/Hr	975

Service Parts

Embraco #	
Bill of Material	602ADL601AA
Relay	2271051-ESP
Overload	*2324142-ESP
Start cap 64-77 mfd 330V	2252365-ESP
Run cap	N/A
Condenser fan motor 25W-208/230V	1450079
Fan blade D.254/28'/5P	2455003
Fan Guard	2458020
Suction valve-3/8	2110060
Discharge valve-1/4	2110086
Receiver 1 liter	2457038
*alternate 2324075-ESP	

HBP-Performance-ASHRAE

Temperature - F	45
Capacity - BTU/Hr	6,329
Power - W	922.2
Current - Amps	10.18
Temperature - C	7.2
Capacity - Kcal/Hr	1,596

1610 Satellite Blvd. Suite B, Duluth Ga, 30097 Phone: 678-805-3074