



CEILING MOUNT SENSOR ADAPTERS

Compatible with Enerlites MPC-50V & MPC-50H



MPC-A

allows the user to mount the ceiling sensor onto the mud ring of several types of junction boxes.

Mount.....J-BOX
Dimensions..... \varnothing 4.5" x 1" D
Compatibility.....MPC/MDC



MPC-B

turns a recessed ceiling mount into a surface mount with a simple and fast installation method.

Mount.....SURFACE
Dimensions..... \varnothing 4.5" x 1.5" D
Compatibility.....MPC/MDC



MPC-C

turns a high-bay fixture mount sensor into a surface mount in minutes, no junction box needed.

Mount.....SURFACE
Dimensions..... \varnothing 4.5" x 1/2" D
Compatibility....MPC-50H/HD



MPC-D


off-set mounting adapter, provides top or side mounting options when installing high bay sensors.

Mount.....SURFACE
Dimensions..... \varnothing 4.5" x 1/2" D
Compatibility....MPC-50H/HD



◀ 360° PIR OCCUPANCY SENSOR | MPC-50V

Line Voltage Light Level Sensor - Height: 8ft. Coverage: 1200 sq. ft
Input Voltage: 120/277 VAC, 60 Hz



360° HIGH BAY PIR OCCUPANCY SENSOR | MPC-50H ▶

2 Lenses: 50ft, 2800 sq. ft | 8ft, 1200 sq. ft
Input Voltage: 120/277 VAC, 50/60 Hz



GET IN TOUCH

📍 1781 McGaw Ave. Irvine, CA 92614


🌐 www.enerlites.com

Auxiliary Mounting Adapter for Ceiling sensor

Model Number: MPC-A

Product Description

The Auxiliary Mounting Adapter allows you to mount ceiling sensors for the below junction boxes.

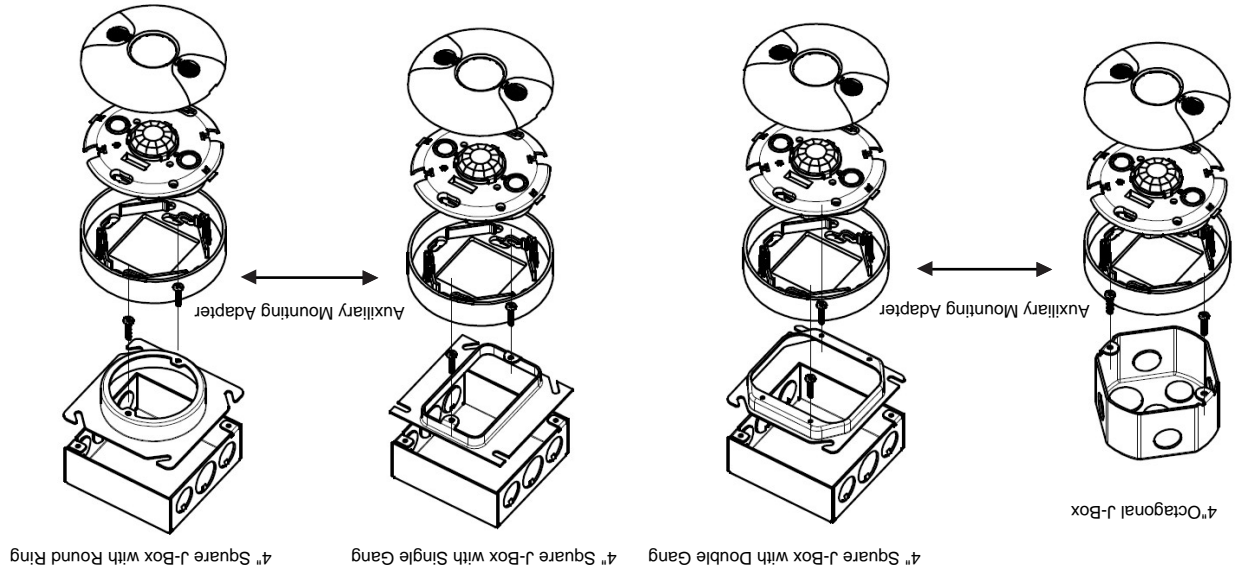

Model Number: MPC-A

Auxiliary Mounting Adapter for Ceiling sensor

Product Description

The Auxiliary Mounting Adapter allows you to mount ceiling sensors for the below junction boxes.

