


4" / 6" NEW CONSTRUCTION FIREPROOF HOUSING



C4

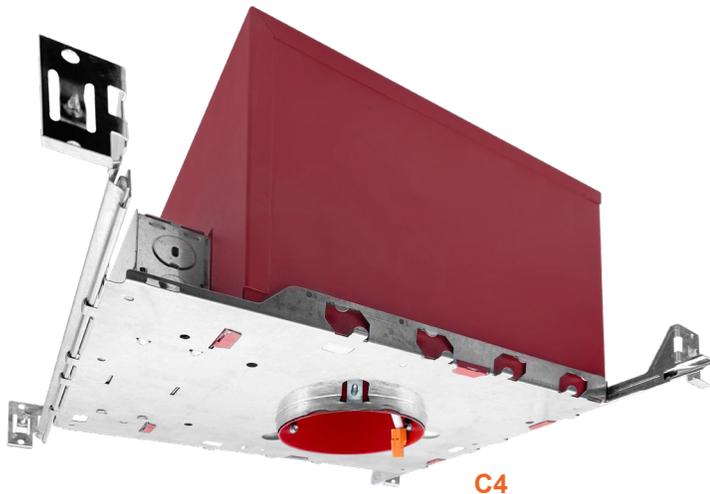

C6

Features:

- IC airtight for direct contact with insulation
- 2-hour fire resistance to meet and exceed strict fire safety codes
- Integrated non-combustible insulation acts as a sound barrier minimizing sound transfer between floors
- Meets title 24 requirements
- STC/IIC sound related

Construction:

- Double wall IC rated for direct contact with insulation. For use in IC and non-IC conditions
- Housing adjusts in frame to accommodate up to 1 1/2" ceiling thickness.
- Airtight housing with gasket to restrict airflow in accordance with ASTM E-283 air-tight requirements.

Installation:

- Designed for ceiling plenums where 2x8 joists or taller are used.
- High strength hanger bars can easily be nailed to joists.
- Suitable for T-grid and drop ceiling applications.
- See installation sheet for detailed information.

Junction Box:

Positioned to accommodate straight conduit runs. Two 3/4" knockouts, Seven 1/2" trade size conduit knockouts, One 3/8" knockout. Four Pry-out knockout slots for easy romex installation.

Hanger Bars:

Pre Installed hanger bars with True Nail easy installation in regular lumber, engineered lumber, and Laminated Beams. Integral T-bar slots for easy installation in T-Bars. Spans up 24" and can be repositioned 90°. Score lines allow for tool-free hanger bar size reduction. Integral leveling flange allows for single-person installation while easily aligning the housings with the joists.

Size

- N C - I C A T - L E D - F R

1

1 Size

C4-NC 4" New Construction
 C6-NC 6" New Construction

2 Volts

120V
 120V

3 Wattage


14W
 22W

4 Warranty

5 Year Included

Specs and model numbers are subject to change with or without notice. Customization of product is available.



FEATURES

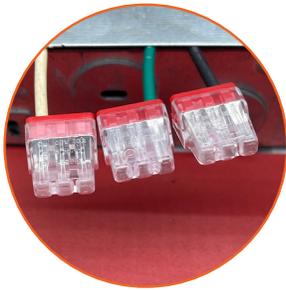

Quick Connector

J-Box


Hanger Bar

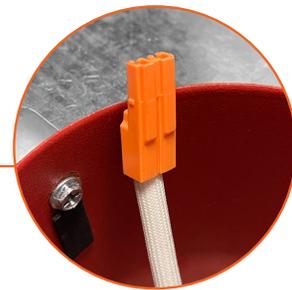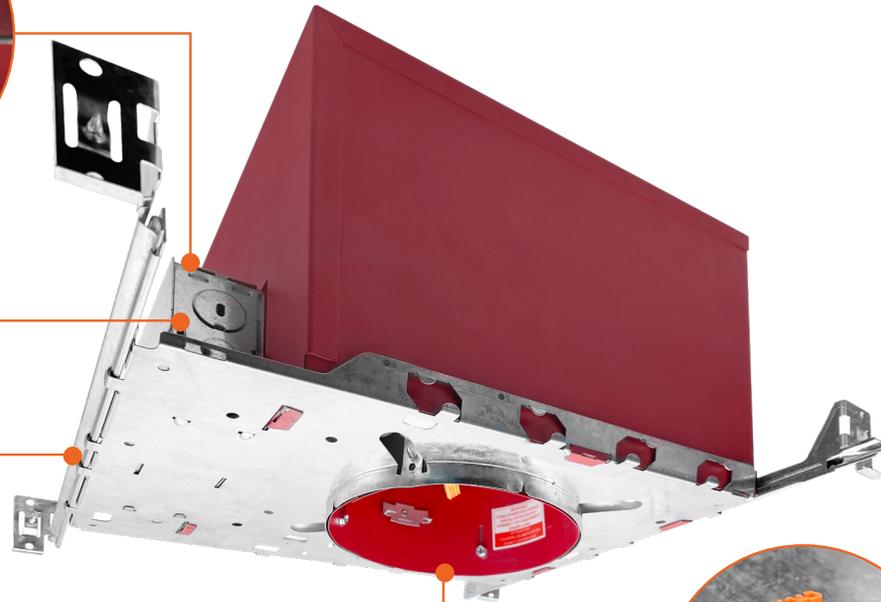

IP24 Connector

DIMENSIONS

4"

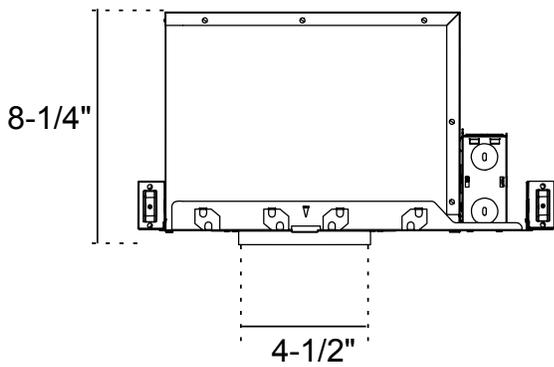

6"

