


# SnapTrim-Line: 2" Regressed Downlight

## Canless Series

Canless



### Detail Specification:

- Finish: White, Black, Round, Square
- IP54 Wet Location Rated
- Beam Angle: 38° standard, other options available
- Chip: COB Chip, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Clear COB
- Average life (L70) of 50,000 hours

### Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

### Product Information:

- 5-CCT Selectable: 27/30/35/40/50K or warm dimming 30 to 18K
- Various sizes, finishes, and trims available
- Standard white round trim included: optional trims available
- Metal housing and trim for better heat dissipation
- Optional emergency backup available: delivers full lumens in EM mode
- SnapTrim Canless: Spring clips with remote j-box eliminates can

### Driver Options:

- 120V Triac Dimmable
- Built in 2.5Kv Surge Protector
- Flicker Free

### Mounting & Installation:

- Cut Out Dimension: 2-3/4"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in/ 3 out)

### Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Emergency	Beam Angle
<b>LED-DLJBX-2-8W-5CCT-W/W-SM</b> 2" 8W 600 Lumens	<b>(Blank)</b> No Emergency Backup	<b>(Blank)</b> 38° Degree
<b>LED-DLJBX-2-6W-3WD-W/W-S</b> 2" 6W 450 Lumens	<b>EMB</b> Emergency Backup	<b>24D</b> 24° Degree
<b>LED-DLJBX-2-12W-3WD-W/W-S</b> 2" 12W 850 Lumens	<b>EMB</b> Emergency Backup	<b>60D</b> 60° Degree
<b>LED-DLJBX-2-15W-5CCT-W/W-S</b> 2" 15W 1,000 Lumens		
<b>LED-DLJBX-2-15W-27K-W/W-S</b> 2" 15W 1,000 Lumens		
<b>LED-DLJBX-2-15W-30K-W/W-S</b> 2" 15W 1,000 Lumens		
<b>LED-DLJBX-2-15W-40K-W/W-S</b> 2" 15W 1,000 Lumens		
<b>LED-DLJBX-2-15W-50K-W/W-S</b> 2" 15W 1,000 Lumens		


### Optional Accessories (Order Separately)

Trim Options	New Construction Plates	Extension Cables	Emergency Backup <sup>1</sup> (field install)	Optics
<b>DLJBX-2-TRIM-BLK-S</b> Black Smooth Reflector & Round Trim	<b>CUNV-NC-ICAT-7H</b> Universal Plate with hanging bars (Round fixtures only)	<b>JBX-EXT-6'-2PIN</b> 6' Extension	<b>LED-EMB-15W-HV-0/10V-2P</b> Up to 14W fixtures	<b>OPTIC-35X17-24D</b> Field Installable
<b>DLJBX-2-TRIM-BZ-S</b> Bronze Smooth Reflector & Round Trim	<b>CUNV-JBX-RI-XL</b> Universal Rough In Plate Extra long (Round fixtures only)	<b>JBX-EXT-10'-2PIN</b> 10' Extension	<b>LED-EMB-25W-HV-0/10V-2P</b> Up to 24W fixtures	<b>OPTIC-35X17-60D</b> Field Installable
<b>DLJBX-2-TRIM-BN-S</b> Brushed Nickel Smooth Reflector & Round Trim		<b>JBX-EXT-12'-2PIN</b> 12' Extension		<b>60 Degree Lens</b> Field Installable
<b>DLJBX-2-TRIM-CH-S</b> Chrome Smooth Reflector & Round Trim				
<b>DLJBX-2-TRIM-WH-BFL</b> White Baffle Reflector & Round Trim				
<b>DLJBX-2-TRIM-BL-BFL</b> Black Baffle Reflector & Round Trim				
<b>DLJBX-2-TRIM-BZ-BFL</b> Black Baffle Reflector & Round Trim				
<b>DLJBX-2-TRIM-WH-S-SQ</b> White Square Trim (Reflector not included)				
<b>DLJBX-2-TRIM-BL-S-SQ</b> Black Square Trim (Reflector not included)				
<b>DLJBX-2-TRIM-BZL-S-SQ</b> Bronze Square Trim (Reflector not included)				
<b>DLJBX-2-TRIM-BN-S-SQ</b> Brushed Nickel Square Trim (Reflector not included)				


1. Field installable. Lasts 90 minutes.

Specs and model numbers are subject to change with or without notice.


**FEATURES**

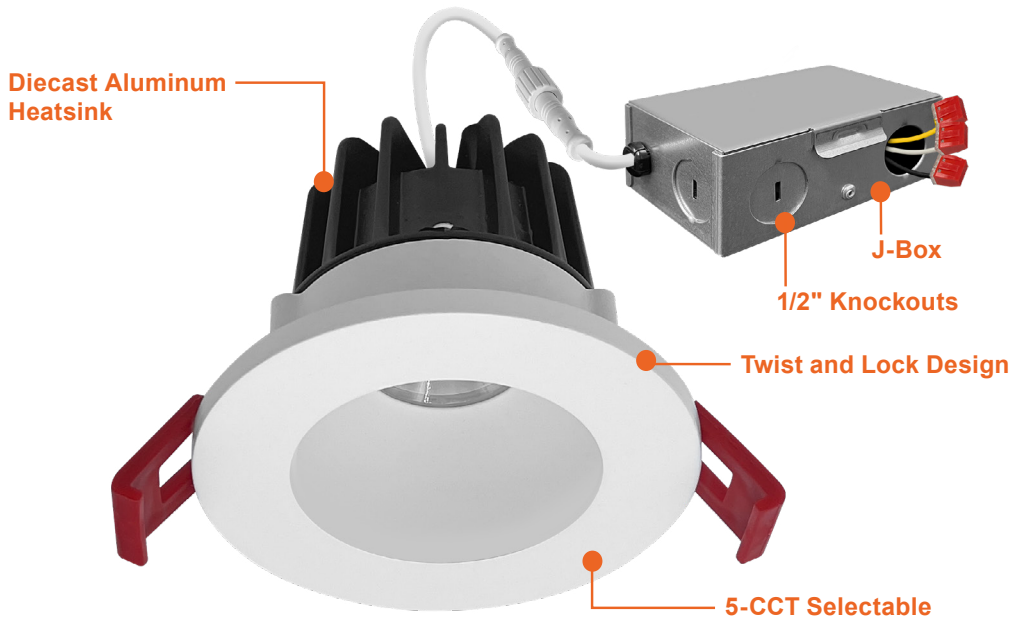

**DIMENSIONS**

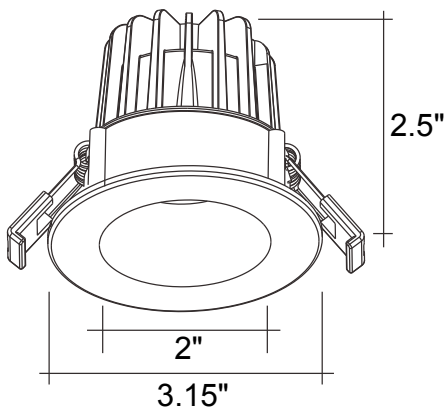

**6W/8W**

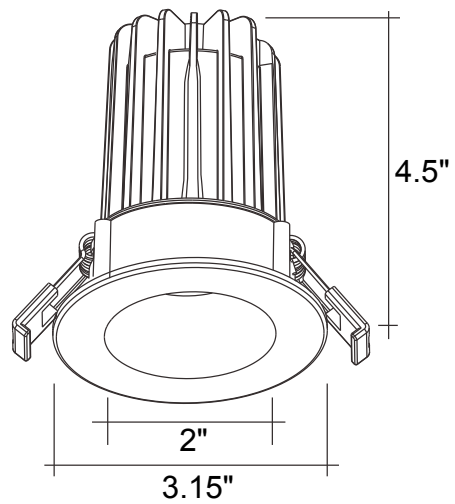

**12W/15W**

## ACCESSORIES



**White** (-WH-S)  
Included  
(-WH-BFL)



**Black** (-BLK-S)  
(BLK-BFL)



**Bronze** (-BZ-S)  
(BZ-BFL)



**Chrome** (-CH-S)



**Nickel** (-BN-S)



**White** (-WH-S)  
(WH-BFL)




**Black** (-BLK-S)  
(BLK-BFL)




**Bronze** (-BZ-S)  
(BZ-BFL)



**Nickel** (-BN-S)




**CUNV-NC-ICAT-7H**  
Universal Pre-Mounting Plate  
13 7/8" x 15 1/8"



**CUNV-JBX-RI-XL**  
7" x 26"



**JBX-EXT**  
6' / 10' / 12' Extension Cable

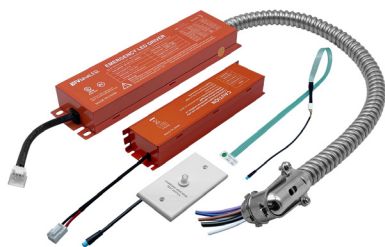

**LED-EMB-15W-HV-0/10V-2P**  
**LED-EMB-25W-HV-0/10V-2P**



**IC-35X17-24D**  
**OPTIC-3.5X17-60D**

Fixture Model	Voltage	Watts	Lumens	Color	CRI
LED-DLJBX-2-6W-3WD-W/W-S	120V	6W	450	30K-18K	>90
LED-DLJBX-2-8W-5CCT-WW-SM	120V	8W	600	27/30/35/40/50k	>90
LED-DLJBX-2-12W-3WD-W/W-S	120V	12W	850	30K-18K	>90
LED-DLJBX-2-15W-5CCT-W/W-S	120V	15W	1000	27/30/35/40/50k	>90
LED-DLJBX-2-15W-27K-W/W-S	120V	15W	1000	2700k	>90
LED-DLJBX-2-15W-30K-W/W-S	120V	15W	1000	3000k	>90
LED-DLJBX-2-15W-40K-W/W-S	120V	15W	1000	4000k	>90
LED-DLJBX-2-15W-50K-W/W-S	120V	15W	1000	5000k	>90

## TRIMS

Trim Model	Description
DLJBX-2-TRIM-BLK-S	2" Black In and Out Smooth Trim
DLJBX-2-TRIM-BL-BFL	2" Black In and Out Baffle Trim
DLJBX-2-TRIM-BZ-S	2" Bronze In and Out Smooth Trim
DLJBX-2-TRIM-BZ-BFL	2" Bronze In and Out Baffle Trim
DLJBX-2-TRIM-BN-S	2" Brushed Nickel In and Out Smooth Trim
DLJBX-2-TRIM-CH-S	2" Chrome In and Out Smooth Trim
DLJBX-2-TRIM-WH-BFL	2" White In and Out Baffle Trim
DLJBX-2-TRIM-BN-S-SQ	2" Brushed Nickel Smooth Square Trim
DLJBX-2-TRIM-BL-S-SQ	2" Black Smooth Square Trim
DLJBX-2-TRIM-BZ-SQ	2" Bronze Smooth Square Trim
DLJBX-2-TRIM-WH-S-SQ	2" White Smooth Square Trim

## CONSTRUCTION PLATES

Accessory	Description
CUNV-NC-ICAT-7H	1" 2"3" 3.5" 4" 5" 6" Universal Pre-Mounting New Construction Plate (Round fixtures only)
CUNV-JBX-RI-XL	Universal tough in plate Extra Long (Round fixtures only)

## EXTENSION CABLE

Accessory	Description
JBX-EXT-6'-2PIN	6" Extension Cable
JBX-EXT-10'-2PIN	10" Extension Cable
JBX-EXT-12'-2PIN	12" Extension Cable

## EMERGENCY BACKUP

Accessory	Description
LED-EMB-15W-HV-0/10V-2P	Up to 14W fixtures
LED-EMB-25W-HV-0/10V-2P	Up to 24W fixtures

## OPTICS

Accessory	Description
IC-35X17-24D	Field Installable 24 Degree Lens
OPTIC-35X17-60D	Field Installable 60 Degree Lens

## TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.  
**TRIAC/ELV Dimmers**

Lutron	Leviton	Legrand	Cooper
AYCL-153P	NTELV-300P	6633	ADTP703TU 9540
DV-600PR	S-600P	6674	H703PTW DAL06P
DVCL-153P	CT-600P	6602	
MACL-153MH	CTCL-153P	IPL06	
MRF2-6CL	TG-600P		
D-600P	TCCL-153P		