
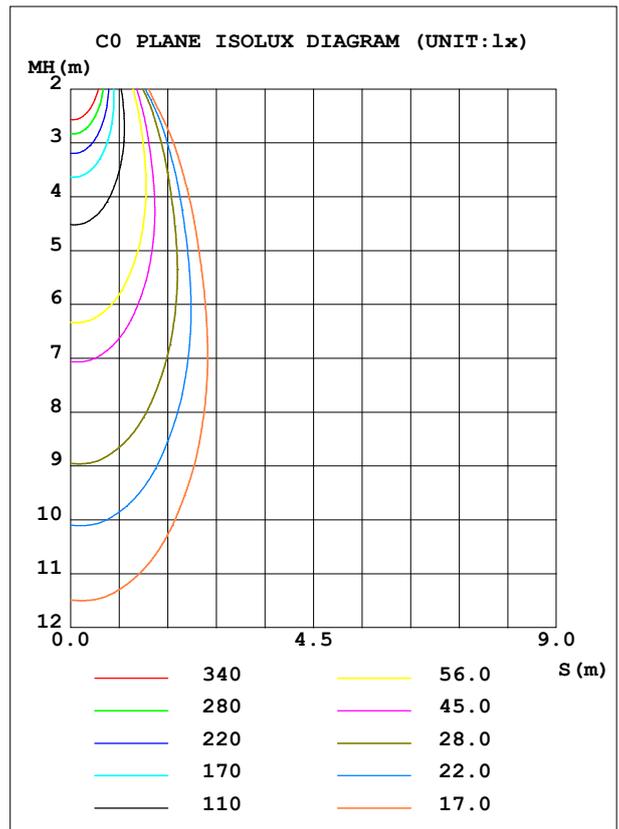


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA				Eff: 81.51 lm/W
MODEL		I _{max} (cd)	2261	S/MH (C0/180)		0.57
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)		0.58
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1045.8	η UP, DN (C0-180)		0.0,48.8
NOMINAL FLUX (lm)	1045.85	CIE CLASS	DIRECT	η UP, DN (C180-360)		0.0,51.2
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM		0.50
TEST VOLTAGE (V)	120	η down (%)	100.0	CIBSE SHR MAX		0.60

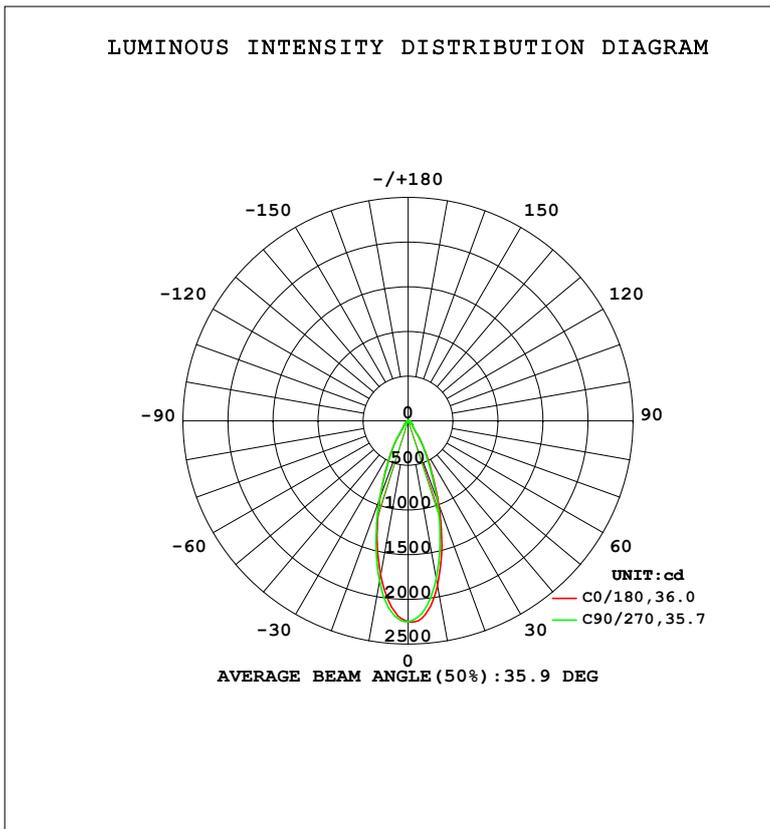

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	1878	1747	1796	1728	1757	1892	1830	1904	0- 10	193.5	193.5	18.5,18.5
20	1001	881.2	940.8	870.1	911.7	1043	932.2	1002	10- 20	379.4	572.9	54.8,54.8
30	348.7	307.2	336.6	308.0	330.8	384.0	322.1	352.6	20- 30	268.4	841.3	80.4,80.4
40	80.65	80.46	85.27	79.23	83.92	90.56	75.28	77.16	30- 40	103.6	944.9	90.4,90.4
50	45.73	42.96	44.21	42.06	42.07	44.18	42.81	45.61	40- 50	45.89	990.8	94.7,94.7
60	25.24	23.12	23.92	22.12	22.42	24.02	21.87	24.75	50- 60	29.55	1020	97.6,97.6
70	12.76	11.98	11.90	11.42	11.41	11.28	10.01	12.08	60- 70	16.93	1037	99.2,99.2
80	4.348	3.420	2.394	3.106	3.790	3.209	2.236	3.390	70- 80	7.478	1045	99.9,99.9
90	0.0611	0.0543	0.0461	0.0461	0.0369	0.0254	0.0331	0.0279	80- 90	1.074	1046	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

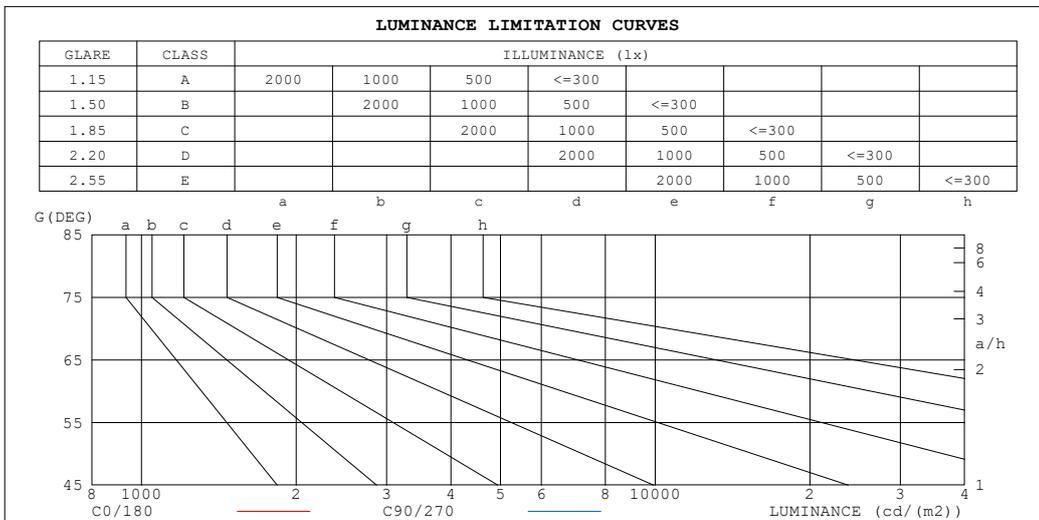

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	151	17
80	225	124
75	280	227
70	335	314
65	390	377
60	453	431
55	553	531
50	639	620
45	775	766


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3°C
 Operators:
 Test Date: 2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.11	1.09	1.07	1.09	1.07	1.05	1.05	1.03	1.02	1.01	.99	.99	.98	.97	.96	.94
2.0	1.04	1.00	.97	1.02	.99	.96	.99	.96	.94	.96	.94	.92	.93	.91	.90	.88
3.0	.98	.93	.89	.96	.92	.88	.94	.90	.87	.91	.88	.86	.89	.86	.84	.83
4.0	.92	.87	.83	.91	.86	.82	.89	.85	.81	.87	.83	.80	.85	.82	.80	.78
5.0	.87	.82	.78	.86	.81	.77	.84	.80	.77	.83	.79	.76	.81	.78	.75	.74
6.0	.82	.77	.73	.82	.77	.73	.80	.76	.72	.79	.75	.72	.78	.74	.71	.70
7.0	.78	.73	.69	.78	.73	.69	.77	.72	.69	.75	.71	.68	.74	.71	.68	.67
8.0	.75	.69	.66	.74	.69	.66	.73	.69	.65	.72	.68	.65	.71	.68	.65	.64
9.0	.72	.66	.63	.71	.66	.63	.70	.66	.62	.69	.65	.62	.69	.65	.62	.61
10.0	.68	.63	.60	.68	.63	.60	.67	.63	.60	.67	.62	.59	.66	.62	.59	.58

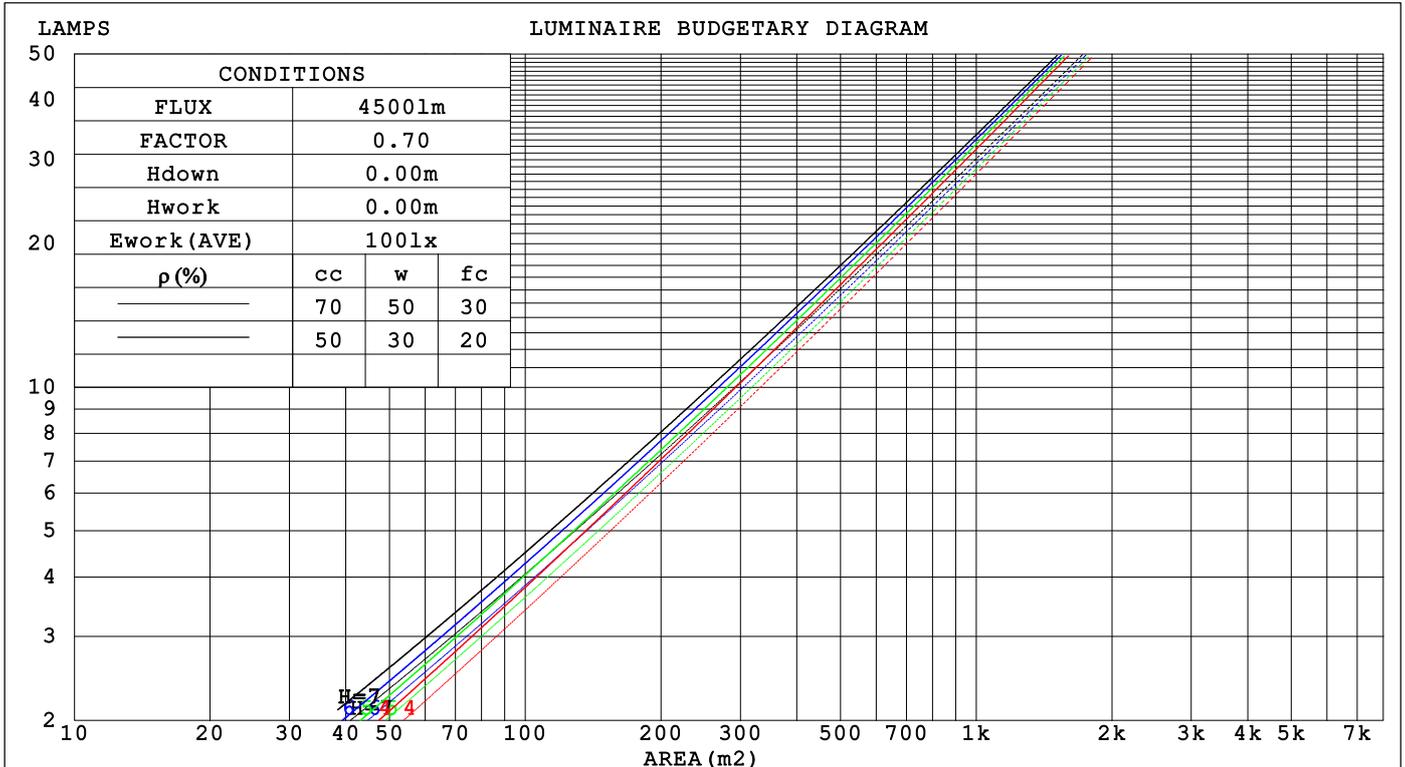

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.172	.098	.031	.165	.094	.030	.153	.088	.028	.141	.082	.026	.131	.076	.024	
2.0	.163	.089	.027	.157	.087	.027	.147	.082	.025	.137	.077	.024	.128	.073	.023	
3.0	.154	.082	.024	.149	.080	.024	.140	.076	.023	.132	.072	.022	.124	.069	.021	
4.0	.145	.075	.022	.141	.074	.022	.133	.071	.021	.126	.068	.020	.119	.065	.020	
5.0	.137	.070	.020	.133	.069	.020	.127	.066	.019	.121	.064	.019	.115	.061	.018	
6.0	.130	.065	.019	.127	.064	.018	.121	.062	.018	.116	.060	.018	.110	.058	.017	
7.0	.123	.061	.017	.121	.060	.017	.116	.058	.017	.111	.057	.017	.106	.055	.016	
8.0	.118	.057	.016	.115	.057	.016	.111	.055	.016	.106	.054	.016	.102	.053	.015	
9.0	.112	.054	.015	.110	.054	.015	.106	.052	.015	.102	.051	.015	.099	.050	.014	
10.0	.107	.051	.014	.105	.051	.014	.102	.050	.014	.098	.049	.014	.095	.048	.014	

ρ_{CC}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.171	.157	.145	.146	.135	.125	.100	.093	.086	.058	.054	.050	.018	.017	.016	
2.0	.155	.133	.114	.133	.114	.098	.091	.079	.068	.052	.046	.040	.017	.015	.013	
3.0	.142	.114	.091	.122	.098	.079	.084	.068	.055	.048	.040	.033	.016	.013	.011	
4.0	.131	.099	.074	.113	.085	.064	.077	.059	.045	.045	.035	.027	.014	.011	.009	
5.0	.122	.087	.061	.105	.075	.053	.072	.053	.038	.042	.031	.022	.013	.010	.007	
6.0	.114	.077	.051	.098	.067	.045	.068	.047	.032	.039	.028	.019	.013	.009	.006	
7.0	.107	.070	.043	.092	.060	.038	.064	.042	.027	.037	.025	.016	.012	.008	.005	
8.0	.101	.063	.037	.087	.055	.033	.060	.039	.023	.035	.023	.014	.011	.007	.005	
9.0	.095	.058	.032	.082	.050	.028	.057	.035	.020	.033	.021	.012	.011	.007	.004	
10.0	.091	.053	.029	.078	.046	.025	.054	.033	.018	.032	.019	.011	.010	.006	.003	

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	6.0	6.9	6.3	7.1	7.2	5.7	6.6	5.9	6.7	6.9
3H	6.6	7.4	6.9	7.6	7.8	6.3	7.1	6.5	7.3	7.5
4H	6.8	7.6	7.1	7.8	8.0	6.4	7.2	6.7	7.4	7.6
6H	6.9	7.6	7.2	7.9	8.1	6.4	7.1	6.7	7.4	7.6
8H	6.9	7.6	7.2	7.9	8.1	6.4	7.1	6.7	7.3	7.6
12H	6.9	7.6	7.2	7.9	8.1	6.3	7.0	6.7	7.3	7.6
4H 2H	6.2	7.0	6.5	7.2	7.4	5.9	6.7	6.2	6.9	7.1
3H	6.9	7.6	7.2	7.9	8.1	6.6	7.3	6.9	7.5	7.8
4H	7.2	7.8	7.6	8.1	8.4	6.8	7.4	7.2	7.7	8.0
6H	7.4	7.9	7.8	8.3	8.6	6.9	7.4	7.3	7.7	8.1
8H	7.4	7.9	7.8	8.3	8.6	6.8	7.3	7.2	7.7	8.1
12H	7.4	7.9	7.8	8.3	8.6	6.8	7.3	7.2	7.6	8.0
8H 4H	7.2	7.7	7.6	8.1	8.4	6.9	7.4	7.3	7.7	8.1
6H	7.5	7.9	7.9	8.3	8.7	7.0	7.4	7.4	7.8	8.2
8H	7.5	7.9	8.0	8.3	8.8	6.9	7.3	7.4	7.7	8.1
12H	7.6	7.9	8.0	8.3	8.8	6.9	7.2	7.3	7.6	8.1
12H 4H	7.2	7.6	7.6	8.0	8.4	6.8	7.3	7.2	7.7	8.1
6H	7.4	7.8	7.9	8.2	8.7	6.9	7.3	7.4	7.7	8.2
8H	7.5	7.8	8.0	8.3	8.7	6.9	7.2	7.4	7.7	8.1

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.6 / - 0.7	+ 0.7 / - 0.9
1.5H	+ 0.8 / - 0.5	+ 1.2 / - 0.6
2.0H	+ 1.1 / - 0.8	+ 1.2 / - 1.0

CIE Pub.117, 1046 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.2)
 Area: 0.111111 m2

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	86	79	75	85	79	75	84	78	75	71
0.80	93	87	83	92	87	83	91	86	82	79
1.00	98	92	88	97	91	88	95	91	87	83
1.25	102	96	93	101	96	92	99	95	92	87
1.50	105	100	96	104	99	96	101	97	95	90
2.00	108	103	100	106	102	99	104	100	98	92
2.50	110	105	102	108	104	101	105	102	100	93
3.00	111	108	105	109	106	104	106	103	101	95
4.00	113	110	108	111	109	107	108	106	104	97
5.00	115	112	110	113	110	109	109	107	106	98
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

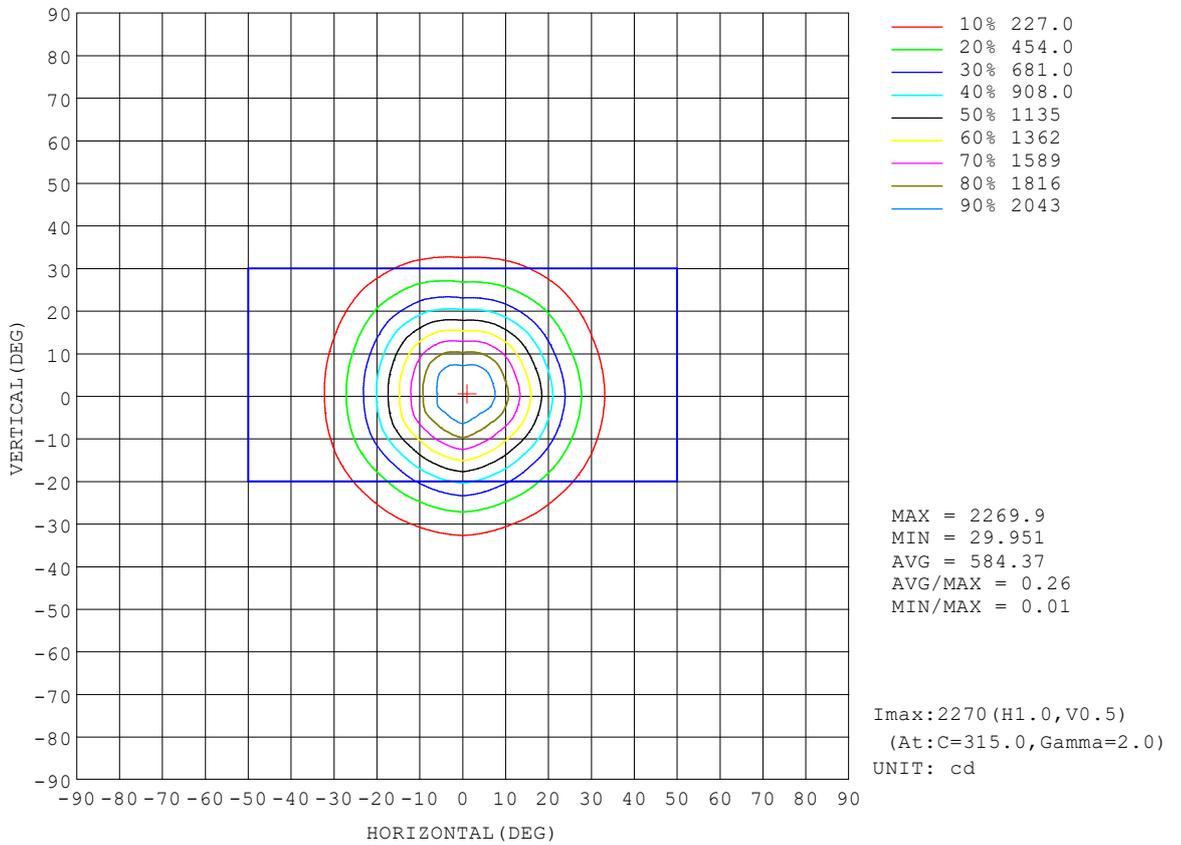


C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

AAI Figure

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

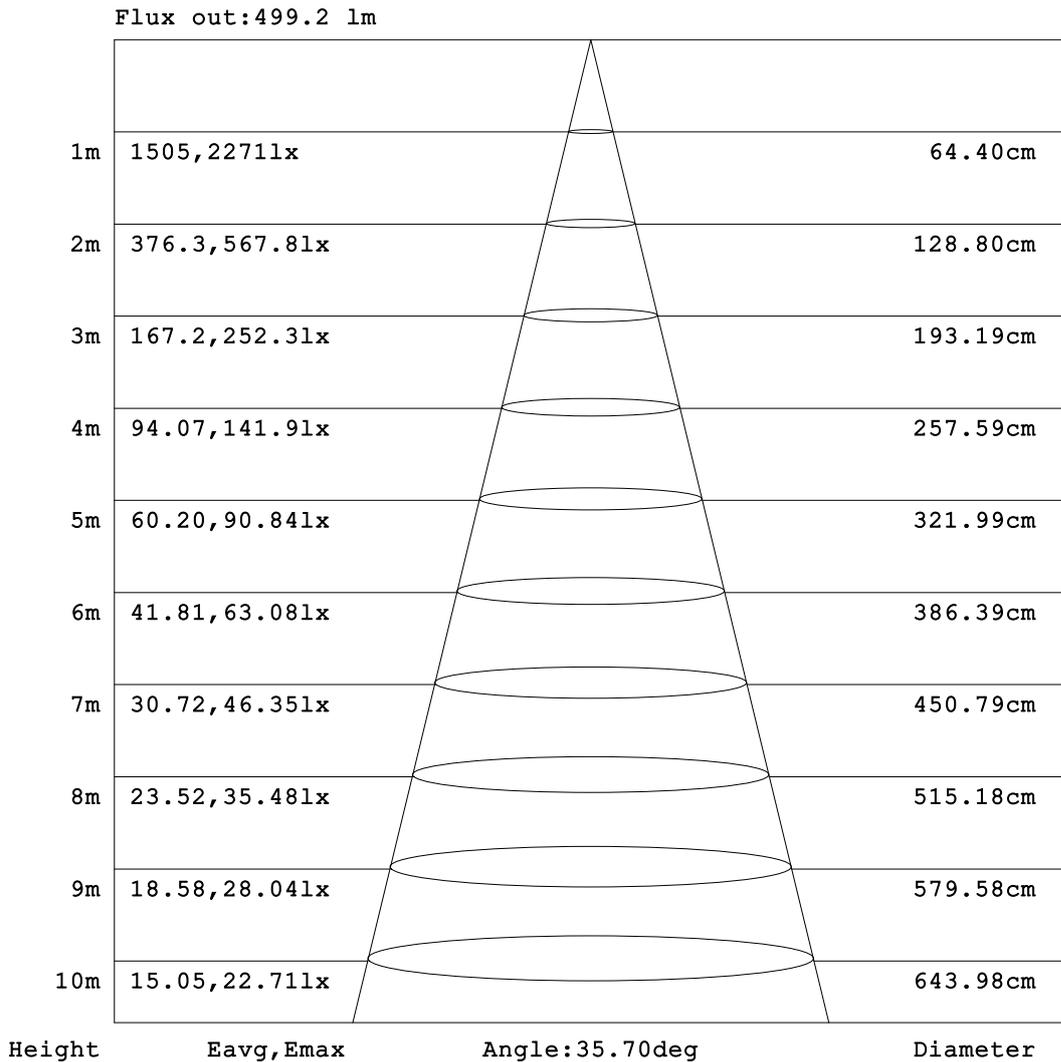


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

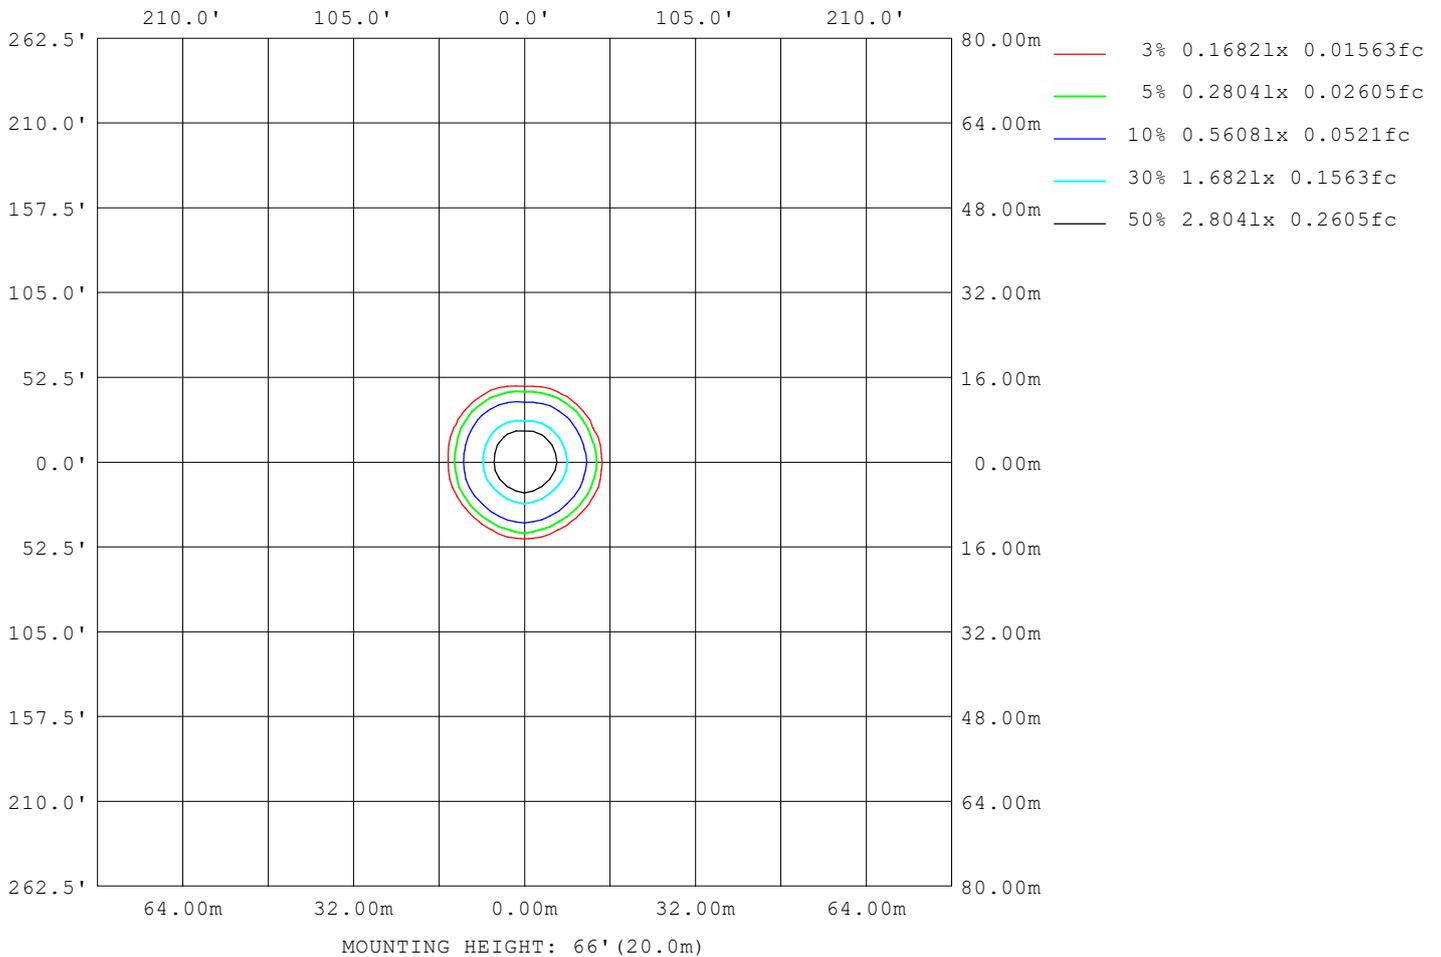

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3°C
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:120.23V I:0.1083A P:12.830W PF:0.9854 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1045.85x1 lm		
NAME: LED-DLJBX-TML-2R-15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	372
L_0~180 (75) av	265
L_0~180 (85) av	135
L_90~270 (65) av	353
L_90~270 (75) av	212
L_90~270 (85) av	17
L_45 (65) av	365
L_45 (75) av	247
L_45 (85) av	50

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature:25.3℃
 Operators:
 Test Date:2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity:65.0%
 Test Distance:3.090m [K=1.0000]
 Remarks:

Planar Illuminance Curve

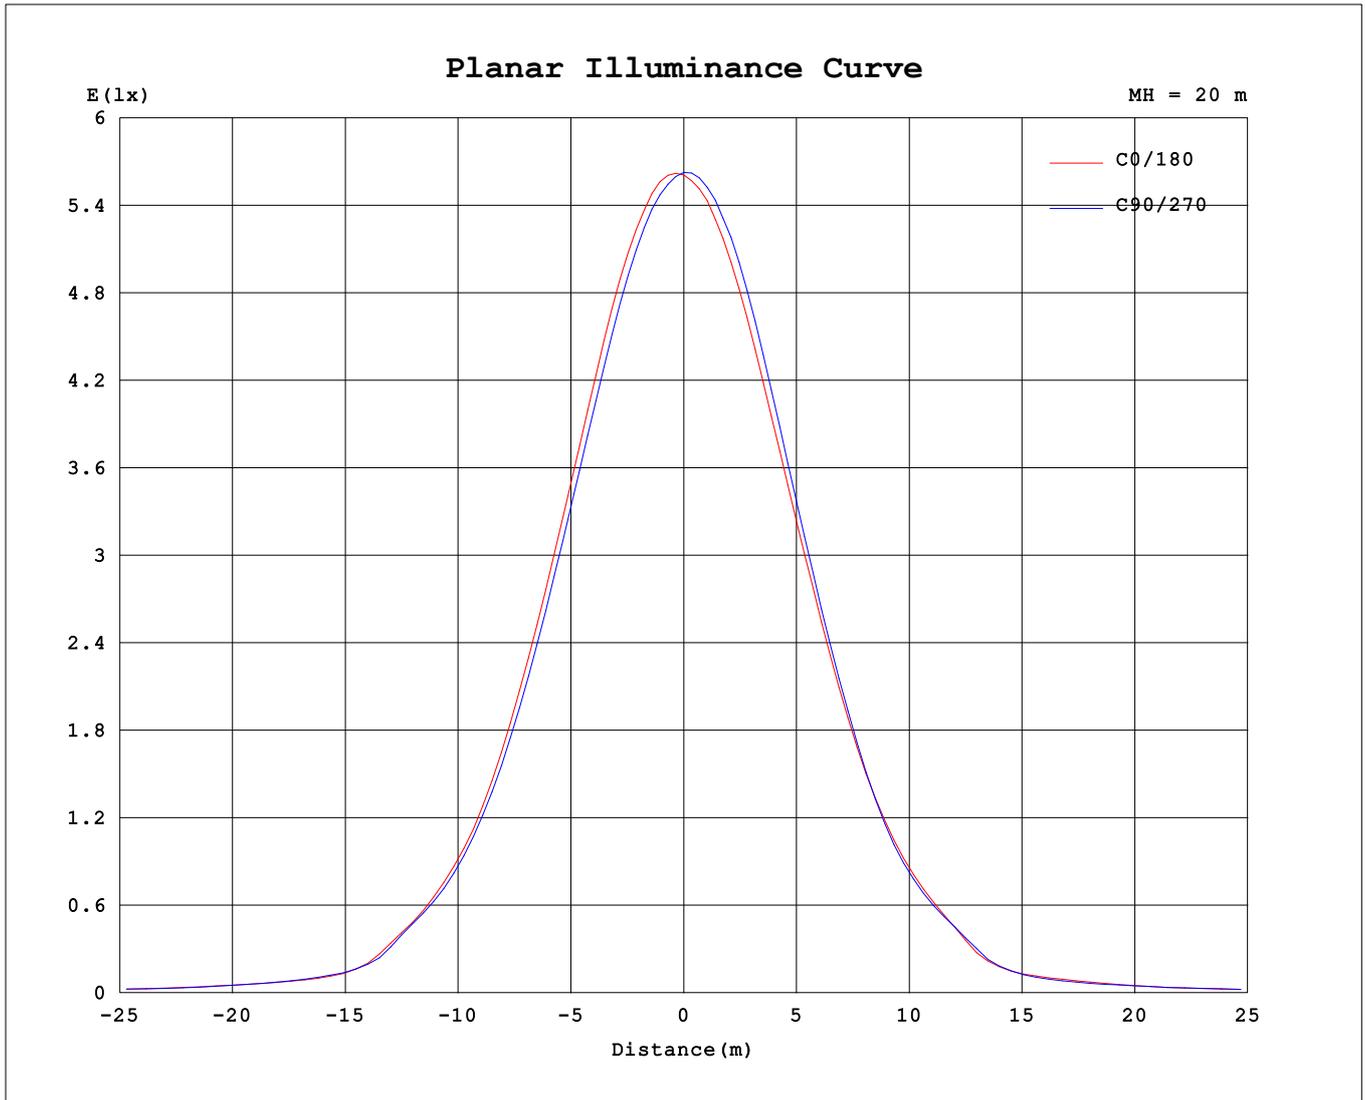

C Range: 0 - 360DEG
 C Interval: 22.5DEG
 Test Speed: HIGH
 Temperature: 25.3 °C
 Operators:
 Test Date: 2022-06-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
 Humidity: 65.0%
 Test Distance: 3.090m [K=1.0000]
 Remarks:

