



SlimLine Surface

Surface Mounts

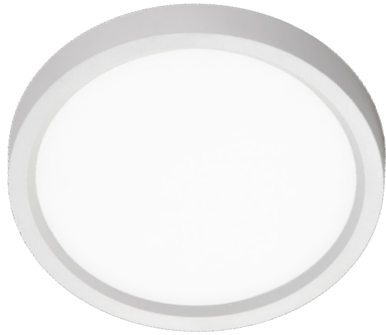

5" / 7" / 12" / 15" / 19"

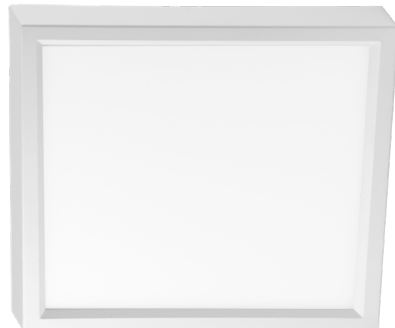

5" / 7" / 12"

WATT	LUMENS
10	650
15	1,000
22	1,450
24	1,800
30	2,000
35	2,200
40	2,700

COLOR	
TRI	30/40/50K
5-CCT	27/30/35/40/50K



Detail Specifications:

- Finishes: White, Bronze, Black, Brushed Nickel
- IP Rating: Wet Location
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Housing: Plastic
- Trims: Metal
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- AC technology: slim and easy driverless installation
- Edge-lit technology: reduces glare with even light distribution
- Standard white round trim included: optional trims available

Driver Options:

- 120V Triac dimmable down to 5%
- (120-277V 0-10V dimmable available on separate spec sheet)
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- AC Driverless technology
- Flicker Free

Mounting & Installations:

- 30/40 Junction Box (including pancake j-box)
- Surface mount bracket included
- 5", 7", 12" Recessed can converter optional

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101
- Closet Rated

Round Series

LED-SLDSKR-5-10W-5CCT-WH
650LM • White Finish
LED-SLDSKR-7-15W-5CCT-WH
1,000LM • White Finish
LED-SLDSKR-12-22W-5CCT-WH
1,450LM • White Finish
LED-SLDSKR-15-30W-5CCT-WH
2,000LM • White Finish
LED-SLDSKR-15-30W-5CCT-BLK
2,000LM • Black Finish
LED-SLDSKR-15-30W-5CCT-BN
2,000LM • Brushed Nickel Finish
LED-SLDSKR-19-35W-5CCT-WH
2,200LM • White Finish
LED-SLDSKR-19-35W-5CCT-BLK
2,200LM • Black Finish
LED-SLDSKR-19-35W-5CCT-BN
2,200LM • Brushed Nickel Finish

Square Series

LED-SLDSKSQ-5-10W-TRI
White Finish
LED-SLDSKSQ-5-10W-5CCT-WH
White Finish
LED-SLDSKSQ-7-15W-5CCT-WH
White Finish
LED-SLDSKSQ-12-22W-5CCT-WH
White Finish

Optional Accessories (Order Separately)

Round Trims

SLDSKR-5-TRIM-BLK
5" Round Black
SLDSKR-5-TRIM-BRZ
5" Round Bronze
SLDSKR-5-TRIM-BNI
5" Round Brushed Nickel
SLDSKR-7-TRIM-BLK
7" Round Black
SLDSKR-7-TRIM-BRZ
7" Round Bronze
SLDSKR-7-TRIM-BNI
7" Round Brushed Nickel
SLDSKR-12-TRIM-BLK
12" Round Black
SLDSKR-12-TRIM-BRZ
12" Round Bronze
SLDSKR-12-TRIM-BNI
12" Round Brushed Nickel
SLDSKR-15-TRIM-BLK
15" Round Black
SLDSKR-15-TRIM-BRZ
15" Round Bronze
SLDSKR-15-TRIM-BNI
15" Round Brushed Nickel

Square Trims

SLDSKSQ-5-TRIM-BLK
5" Square Black
SLDSKSQ-5-TRIM-BRZ
5" Square Bronze
SLDSKSQ-5-TRIM-BNI
5" Square Brushed Nickel
SLDSKSQ-7-TRIM-BLK
7" Square Black
SLDSKSQ-7-TRIM-BRZ
7" Square Bronze
SLDSKSQ-7-TRIM-BNI
7" Square Brushed Nickel
SLDSKSQ-12-TRIM-BLK
12" Square Black
SLDSKSQ-12-TRIM-BRZ
12" Square Bronze
SLDSKSQ-12-TRIM-BNI
12" Square Brushed Nickel

Recessed Can Converter Emergency Backup

SLDSK-4CLIP
4" Recessed Can Converter for 5" fixtures
SLDSK-7-6CLIP
6" Recessed Can Converter for 7" fixtures
SLDSK-12-6CLIP
6" Recessed Can Converter for 12" fixtures

SLDSKR-7-EMB-UNV
Surface mount pancake EMB
SLDSKR-7-EMB-EMPTY-UNV
Empty surface mount pancake EMB
SLDSKR-12-EMB-UNV
Surface mount pancake EMB
SLDSKR-12-EMB-EMPTY-UNV
Empty surface mount pancake EMB
LED-EMB-25W-HV-2P
For fixtures up to 25W

Pendant Stem Mount

STM-JBX-6-WH
6' Stem Mount (Adjustable length) White Finish
STM-JBX-6-BLK
6' Stem Mount (Adjustable length) Black Finish



Specs and model numbers are subject to change with or without notice.

FEATURES



5-CCT or 3-CCT
Selectable

Suitable for
Wet Locations



Super Slim Profile

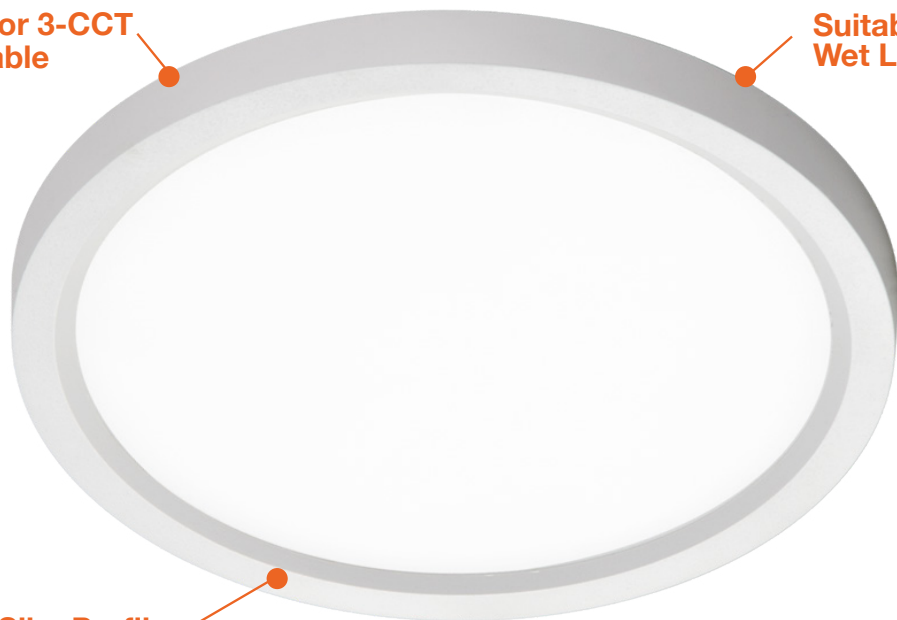



DIMENSIONS





5" Round





7" Round





12" Round





15" Round





19" Round





5" Square





7" Square




12" Square




SLDSKR-7-EMB-UNV



SLDSKR-7-EMB-EMPTY-UNV




SLDSKR-12-EMB-UNV



SLDSKR-12-EMB-EMPTY-UNV

CLIP-ON TRIMS - 5" / 7" / 12" / 15"

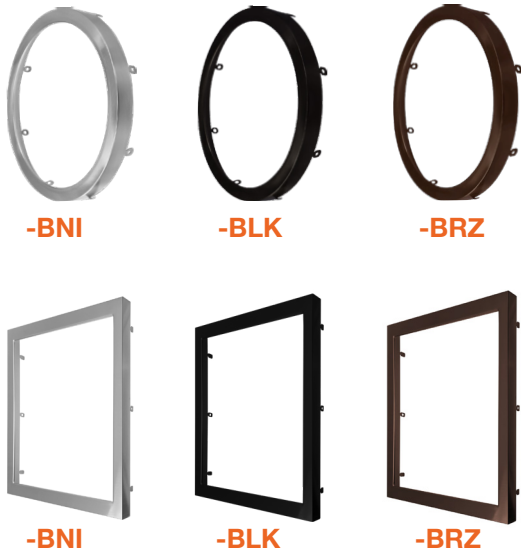

ACCESSORIES



SLDSKR-7-EMB-UNV
SLDSKR-12-EMB-UNV

SLDSKR-7-EMB-EMPTY-UNV
SLDSKR-12-EMB-EMPTY-UNV



STM-JBX-6-WH
STM-JBX-6-BLK



SLDSK-4CLIP

SLDSK-7-6CLIP

SLDSK-12-6CLIP

SURFACE MOUNTS

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKR-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50k	>90
LED-SLDSKR-7-15W-5CCT-WH	120V	15w	1,000	27/30/35/40/50k	>90
LED-SLDSKR-12-22W-5CCT-WH	120V	22w	1,450	27/30/35/40/50k	>90
LED-SLDSKR-15-30W-5CCT-WH	120V	30w	2,000	27/30/35/40/50k	>90
LED-SLDSKR-15-30W-5CCT-BLK	120V	30w	2,000	27/30/35/40/50k	>90
LED-SLDSKR-15-30W-5CCT-BN	120V	30w	2,000	27/30/35/40/50k	>90
LED-SLDSKR-19-35W-5CCT-WH	120V	35w	2,200	27/30/35/40/50k	>90
LED-SLDSKR-19-35W-5CCT-BLK	120V	35w	2,200	27/30/35/40/50k	>90
LED-SLDSKR-19-35W-5CCT-BN	120V	35w	2,200	27/30/35/40/50k	>90

FIXTURE, TRIM, & ACCESSORY

Trim Model	Description
SLDSKR-5-TRIM-BLK	Black 5" Round Trim
SLDSKR-5-TRIM-BRZ	Bronze 5" Round Trim
SLDSKR-5-TRIM-BNI	Brushed Nickel 5" Round Trim
SLDSKR-7-TRIM-BLK	Black 7" Round Trim
SLDSKR-7-TRIM-BRZ	Bronze 7" Round Trim
SLDSKR-7-TRIM-BNI	Brushed Nickel 7" Round Trim
SLDSKR-12-TRIM-BLK	Black 12" Round Trim
SLDSKR-12-TRIM-BRZ	Bronze 12" Round Trim
SLDSKR-12-TRIM-BNI	Brushed Nickel 12" Round Trim
SLDSKR-15-TRIM-BLK	Black 15" Round Trim
SLDSKR-15-TRIM-BRZ	Bronze 15" Round Trim
SLDSKR-15-TRIM-BNI	Brushed Nickel 15" Round Trim
SLDSKSQ-5-TRIM-BLK	Black 5" Square Trim
SLDSKSQ-5-TRIM-BRZ	Bronze 5" Square Trim
SLDSKSQ-5-TRIM-BNI	Brushed Nickel 5" Square Trim
SLDSKSQ-7-TRIM-BLK	Black 7" Square Trim
SLDSKSQ-7-TRIM-BRZ	Bronze 7" Square Trim
SLDSKSQ-7-TRIM-BNI	Brushed Nickel 7" Square Trim
SLDSKSQ-12-TRIM-BLK	Black 12" Square Trim
SLDSKSQ-12-TRIM-BRZ	Bronze 12" Square Trim
SLDSKSQ-12-TRIM-BNI	Brushed Nickel 12" Square Trim

EMERGENCY BACKUP

Accessory Model	Description
SLDSKR-7-EMB-UNV	Surface mount pancake EMB
SLDSKR-7-EMB-EMPTY-UNV	Empty surface mount pancake EMB
SLDSKR-12-EMB-UNV	Surface mount pancake EMB
SLDSKR-12-EMB-EMPTY-UNV	Empty surface mount pancake EMB

RECESSED CAN CONVERTER

Accessory Model	Description
SLDSK-4CLIP	4" Recessed Can Converter for 5" fixtures
SLDSK-7-6CLIP	Recessed Can Converter for 7" fixtures
SLDSK-12-6CLIP	Recessed Can Converter for 12" fixtures

PENDANT STEM MOUNT

Accessory Model	Description
STM-JBX-6-WH	6' Stem Mount (Adjustable length) White Finish
STM-JBX-6-BLK	6' Stem Mount (Adjustable length) Black Finish

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

Lutron	Lutron
PD-6WCL	MACL-153M
DVCL-153P	LECL-153P
CTCL-153P	

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLDSKSQ-5-10W-TRI	120V	10w	650	30/40/50k	>90
LED-SLDSKSQ-5-10W-5CCT-WH	120V	10w	650	27/30/35/40/50k	>90
LED-SLDSKSQ-7-15W-5CCT-WH	120V	15w	1,000	27/30/35/40/50k	>90
LED-SLDSKSQ-12-22W-5CCT-WH	120V	22w	1,450	27/30/35/40/50k	>90