
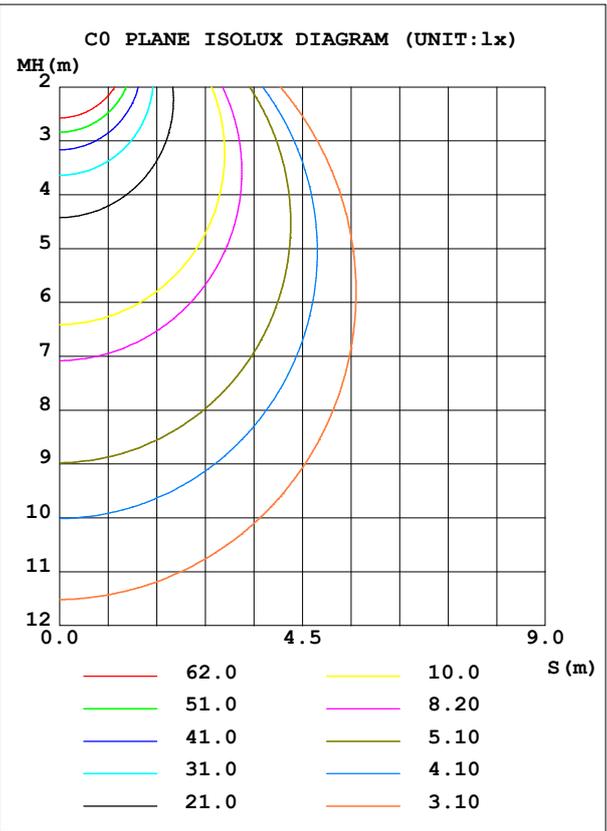


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL		Imax (cd)	411.5	S/MH (C0/180)	1.25
NOMINAL POWER (W)	15	LOR (%)	100.0	S/MH (C90/270)	1.24
RATED VOLTAGE (V)	120	TOTAL FLUX (lm)	1149.3	$\eta$ UP, DN (C0-180)	0.0, 50.4
NOMINAL FLUX (lm)	1149.28	CIE CLASS	DIRECT	$\eta$ UP, DN (C180-360)	0.0, 49.6
LAMPS INSIDE	1	$\eta$ up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	120	$\eta$ down (%)	100.0	CIBSE SHR MAX	1.35

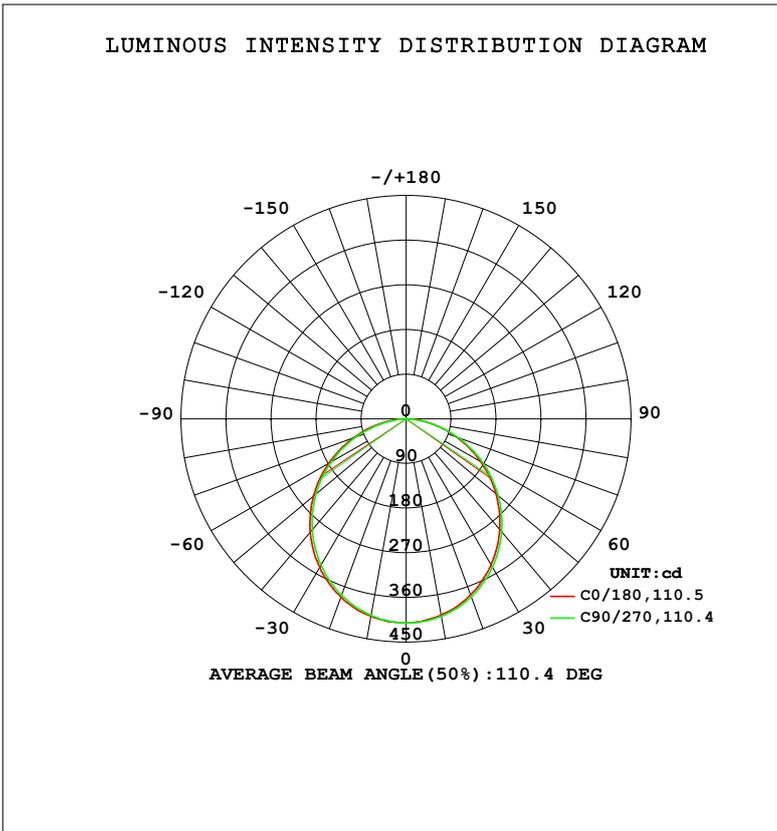

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2022-06-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


$\gamma$	C0	C45	C90	C135	C180	C225	C270	C315	$\gamma$	$\Phi$ zone	$\Phi$ total	%lum,lamp
10	401.9	403.7	404.2	404.3	404.0	403.7	402.5	401.5	0- 10	38.86	38.86	3.38,3.38
20	377.3	380.5	381.7	382.1	382.2	381.0	378.2	376.7	10- 20	111.0	149.8	13,13
30	339.6	343.8	345.1	345.9	345.5	343.6	340.7	338.6	20- 30	167.2	317.1	27.6,27.6
40	291.3	296.0	297.1	298.0	298.5	296.0	291.9	289.6	30- 40	200.2	517.2	45,45
50	234.5	239.6	240.3	241.1	241.7	239.3	235.0	232.6	40- 50	206.1	723.3	62.9,62.9
60	171.8	176.4	177.4	177.8	178.3	175.9	172.4	169.7	50- 60	185.0	908.3	79,79
70	106.8	110.8	111.4	111.6	111.9	109.4	106.4	104.7	60- 70	140.6	1049	91.3,91.3
80	45.69	46.28	45.07	47.58	49.03	43.59	40.27	42.36	70- 80	80.77	1130	98.3,98.3
90	0.4785	0.4604	0.4500	0.4621	0.3862	0.2786	0.2761	0.3054	80- 90	19.54	1149	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2022-06-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

**LUMINANCE LIMITATION CURVES**

<b>Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz</b> <b>UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm</b>		
<b>NAME: LED-SL-PNL-6R-3P15W-5CCT-WH</b>	<b>TYPE:</b>	<b>WEIGHT:</b>
<b>SPEC.: 3500K</b>	<b>DIM.:</b>	<b>SERIAL No.:</b>
<b>MFR.: Envisionled</b>	<b>SUR.:</b>	<b>Shielding Angle:</b>

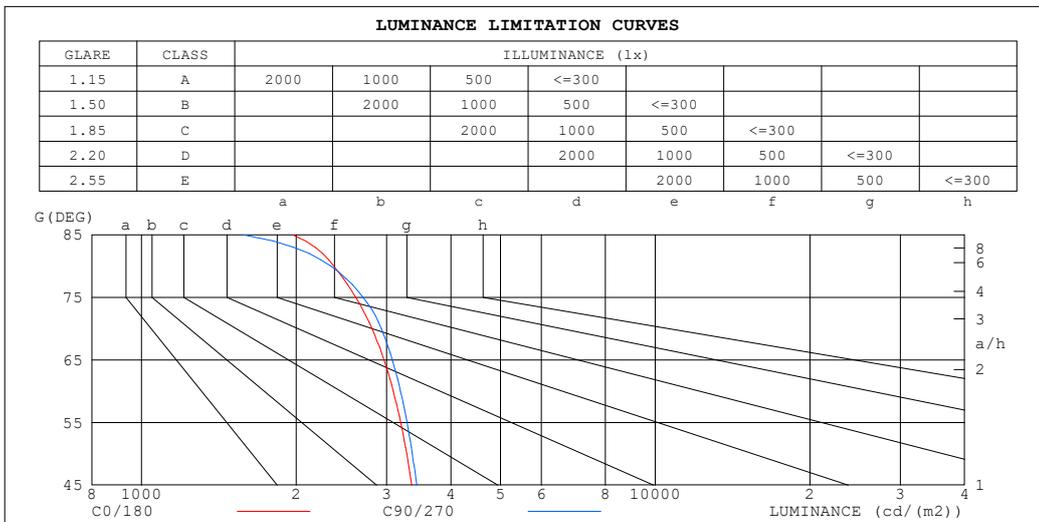

LUMINANCE cd/(m2)		
G (DEG)	C0/180	C90/270
85	1969	1578
80	2368	2336
75	2612	2698
70	2811	2931
65	2965	3078
60	3093	3193
55	3195	3289
50	3284	3365
45	3358	3434


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2022-06-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

**CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz		
UTHdi:0.00% ITHdi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio Coefficients of Utilization(CU)															
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.04	.00	.96	1.02	.98	.94	.97	.94	.91	.94	.91	.89	.90	.88	.86	.84
2.0	.91	.84	.78	.89	.82	.77	.85	.80	.75	.82	.77	.74	.79	.75	.72	.70
3.0	.80	.71	.65	.78	.70	.64	.75	.68	.63	.72	.67	.62	.70	.65	.61	.59
4.0	.70	.62	.55	.69	.61	.54	.67	.59	.54	.64	.58	.53	.62	.57	.52	.50
5.0	.63	.54	.47	.62	.53	.47	.60	.52	.46	.58	.51	.46	.56	.50	.45	.43
6.0	.57	.48	.41	.56	.47	.41	.54	.46	.41	.52	.45	.40	.51	.45	.40	.38
7.0	.51	.43	.36	.51	.42	.36	.49	.41	.36	.48	.41	.36	.46	.40	.35	.33
8.0	.47	.38	.32	.46	.38	.32	.45	.37	.32	.44	.37	.32	.42	.36	.32	.30
9.0	.43	.35	.29	.42	.35	.29	.41	.34	.29	.40	.34	.29	.39	.33	.29	.27
10.0	.40	.32	.26	.39	.32	.26	.38	.31	.26	.37	.31	.26	.36	.30	.26	.24

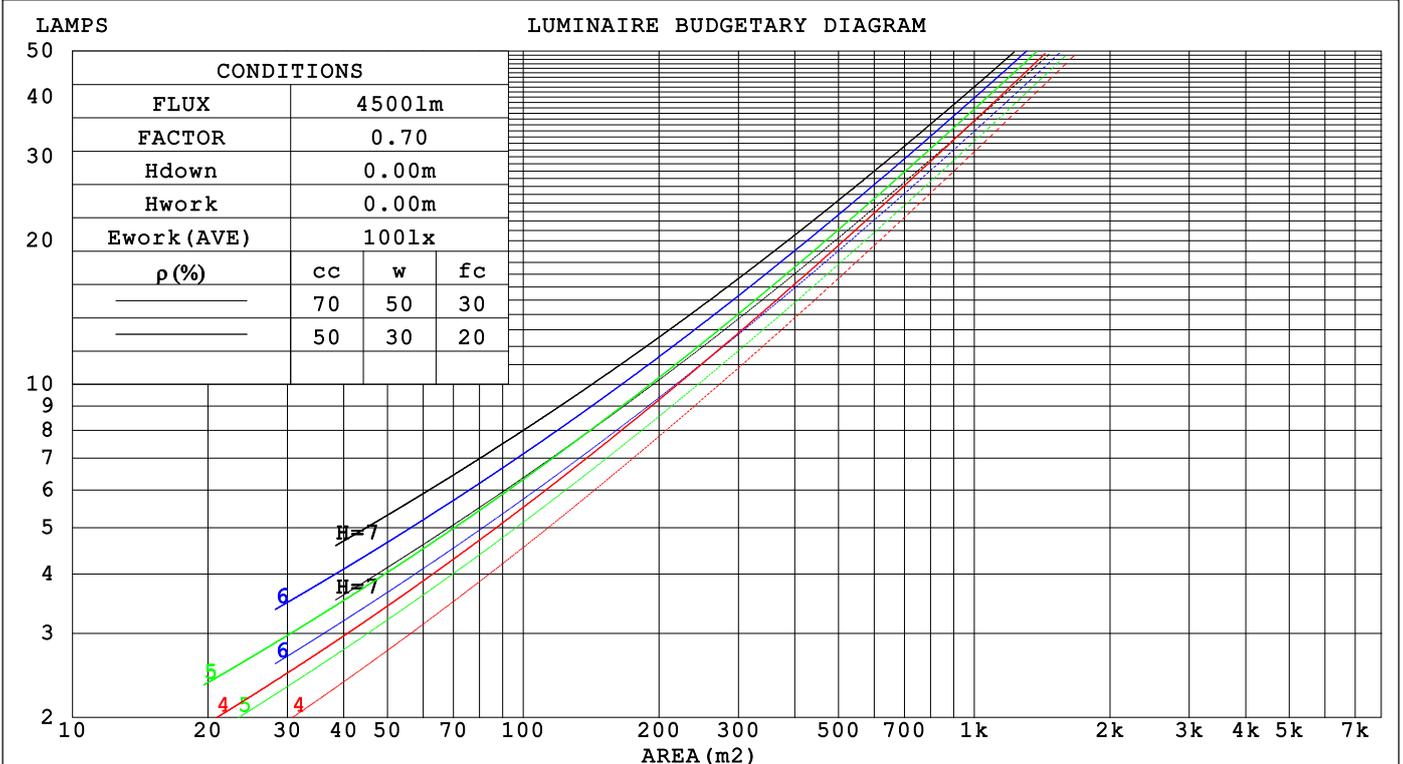

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2022-06-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

**WEC AND CCEC**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.307	.175	.055	.300	.171	.054	.287	.165	.053	.275	.159	.051	.264	.153	.049	
2.0	.290	.159	.049	.284	.156	.048	.272	.151	.047	.262	.147	.046	.252	.142	.045	
3.0	.269	.143	.043	.263	.141	.042	.253	.137	.042	.244	.133	.041	.235	.130	.040	
4.0	.248	.129	.038	.243	.127	.038	.234	.124	.037	.226	.121	.037	.218	.118	.036	
5.0	.230	.117	.034	.225	.116	.034	.217	.113	.033	.210	.111	.033	.203	.108	.033	
6.0	.213	.107	.031	.209	.106	.030	.202	.104	.030	.195	.101	.030	.189	.099	.030	
7.0	.198	.098	.028	.195	.097	.028	.188	.095	.027	.182	.094	.027	.177	.092	.027	
8.0	.185	.091	.025	.182	.090	.025	.176	.088	.025	.171	.087	.025	.166	.085	.025	
9.0	.174	.084	.023	.171	.083	.023	.166	.082	.023	.161	.081	.023	.156	.079	.023	
10.0	.163	.078	.022	.161	.078	.022	.156	.076	.022	.152	.075	.021	.148	.074	.021	

$\rho_{CC}$	80%			70%			50%			30%			10%			0
$\rho_w$	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
$\rho_{fc}$	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.180	.156	.135	.154	.134	.116	.105	.092	.080	.061	.053	.047	.019	.017	.015	
2.0	.172	.132	.098	.147	.114	.085	.101	.079	.059	.058	.046	.035	.019	.015	.011	
3.0	.164	.114	.074	.141	.099	.065	.097	.068	.045	.056	.040	.027	.018	.013	.009	
4.0	.157	.101	.058	.134	.087	.051	.092	.061	.036	.053	.036	.021	.017	.012	.007	
5.0	.149	.091	.047	.128	.078	.041	.088	.055	.029	.051	.032	.017	.016	.010	.006	
6.0	.142	.082	.039	.122	.071	.034	.084	.050	.024	.049	.029	.014	.016	.010	.005	
7.0	.135	.075	.033	.116	.065	.029	.080	.046	.021	.047	.027	.012	.015	.009	.004	
8.0	.129	.069	.029	.111	.060	.025	.077	.042	.018	.045	.025	.011	.014	.008	.004	
9.0	.123	.065	.025	.106	.056	.022	.073	.039	.016	.043	.023	.009	.014	.008	.003	
10.0	.117	.060	.022	.101	.052	.020	.070	.037	.014	.041	.022	.008	.013	.007	.003	

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2022-06-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

**UGR(Unified Glare Rating) Table**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2

Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	16.4	18.0	16.7	18.2	18.4	16.6	18.1	16.8	18.3	18.5
3H	17.9	19.3	18.2	19.6	19.8	18.1	19.5	18.4	19.7	20.0
4H	18.5	19.9	18.8	20.1	20.4	18.7	20.0	19.0	20.3	20.5
6H	19.0	20.2	19.3	20.5	20.8	19.1	20.4	19.4	20.6	20.9
8H	19.1	20.3	19.4	20.6	20.9	19.2	20.4	19.6	20.7	21.0
12H	19.2	20.3	19.5	20.6	20.9	19.3	20.4	19.6	20.7	21.0
4H 2H	17.1	18.4	17.4	18.7	18.9	17.2	18.5	17.5	18.7	19.0
3H	18.8	19.9	19.1	20.2	20.5	18.9	20.1	19.2	20.4	20.7
4H	19.5	20.6	19.9	20.9	21.2	19.6	20.7	20.0	21.0	21.3
6H	20.0	21.0	20.4	21.3	21.7	20.2	21.1	20.6	21.5	21.8
8H	20.2	21.1	20.7	21.5	21.9	20.3	21.2	20.7	21.6	22.0
12H	20.4	21.2	20.8	21.6	22.0	20.4	21.2	20.8	21.6	22.0
8H 4H	19.8	20.7	20.2	21.0	21.4	19.9	20.8	20.3	21.1	21.5
6H	20.5	21.2	20.9	21.6	22.0	20.6	21.3	21.0	21.7	22.1
8H	20.8	21.4	21.2	21.8	22.3	20.8	21.5	21.3	21.9	22.3
12H	20.9	21.5	21.4	22.0	22.4	20.9	21.5	21.4	22.0	22.4
12H 4H	19.8	20.6	20.2	21.0	21.4	19.9	20.7	20.3	21.1	21.5
6H	20.5	21.2	21.0	21.6	22.1	20.6	21.3	21.1	21.7	22.2
8H	20.8	21.4	21.3	21.9	22.3	20.9	21.5	21.4	21.9	22.4

Variations with the observer position at spacings(CIE Pub.117):		
S = 1.0H	+ 0.2 / - 0.2	+ 0.1 / - 0.2
1.5H	+ 0.2 / - 0.3	+ 0.2 / - 0.3
2.0H	+ 0.2 / - 0.3	+ 0.2 / - 0.3

CIE Pub.117, 1149 lm Total Lamp Luminous Flux Correct (8log(F/F0) = 0.5)  
 Area: 0.111111 m2

C Range: 0 - 360DEG	γ Range: 0 - 90DEG
C Interval: 22.5DEG	γ Interval: 1.0DEG
Test Speed: HIGH	Test System:EVERFINE GO-SPEX500_V1 SYSTEM V2.00.460
Temperature:25.3°C	Humidity:65.0%
Operators:	Test Distance:3.090m [K=1.0000]
Test Date:2022-06-20	Remarks:

**UTILIZATION FACTORS TABLE**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS (PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	58	46	39	57	46	39	56	45	39	33
0.80	68	56	49	67	56	49	65	55	48	41
1.00	76	65	58	75	65	58	73	66	57	50
1.25	83	73	66	82	72	65	79	71	64	57
1.50	88	78	71	87	78	71	84	76	70	62
2.00	95	87	80	93	85	79	90	83	78	70
2.50	99	91	85	97	90	84	93	87	82	74
3.00	102	96	90	100	94	89	96	91	87	78
4.00	106	101	96	104	99	95	100	96	92	83
5.00	109	104	100	106	102	98	102	98	95	86
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended				SHRNOM = 1.25			

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2022-06-20

$\gamma$  Range: 0 - 90DEG  
 $\gamma$  Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

**ISOCANDELA DIAGRAM**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

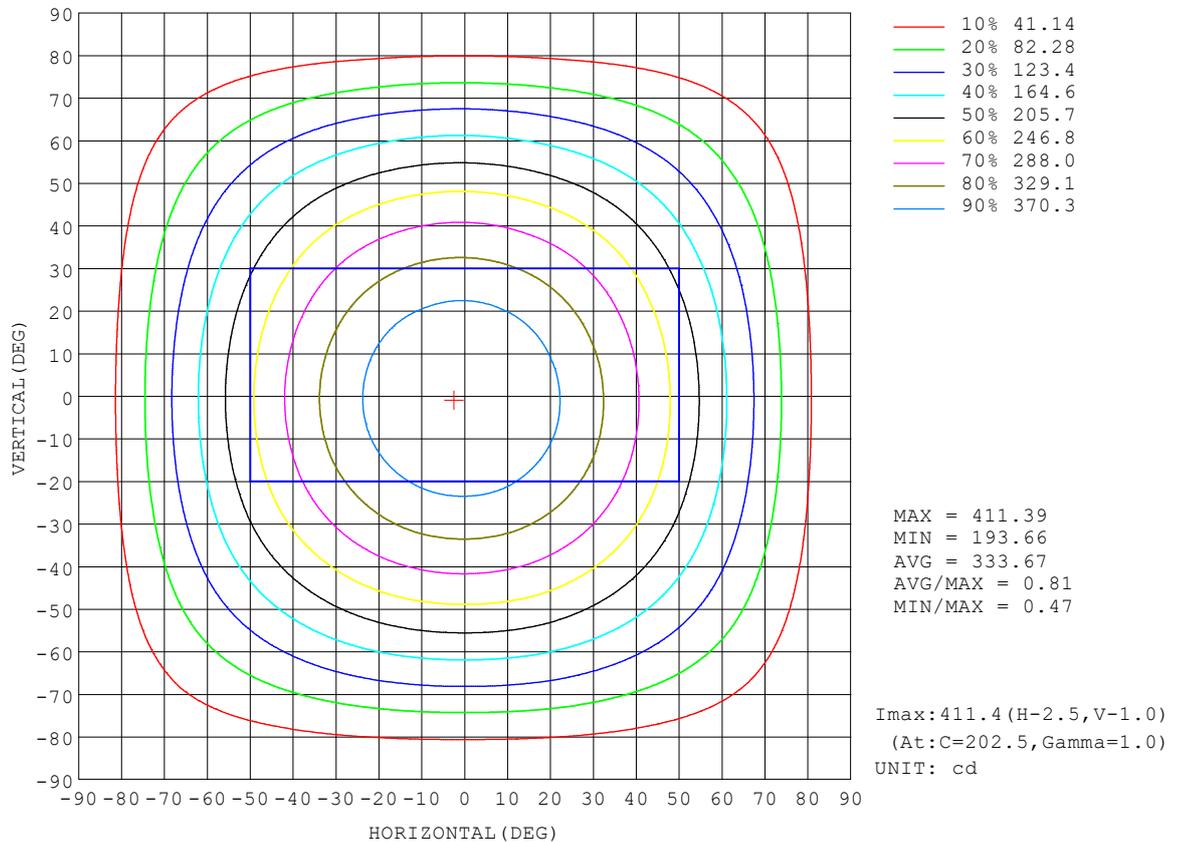


C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2022-06-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

**AAI Figure**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz		
UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

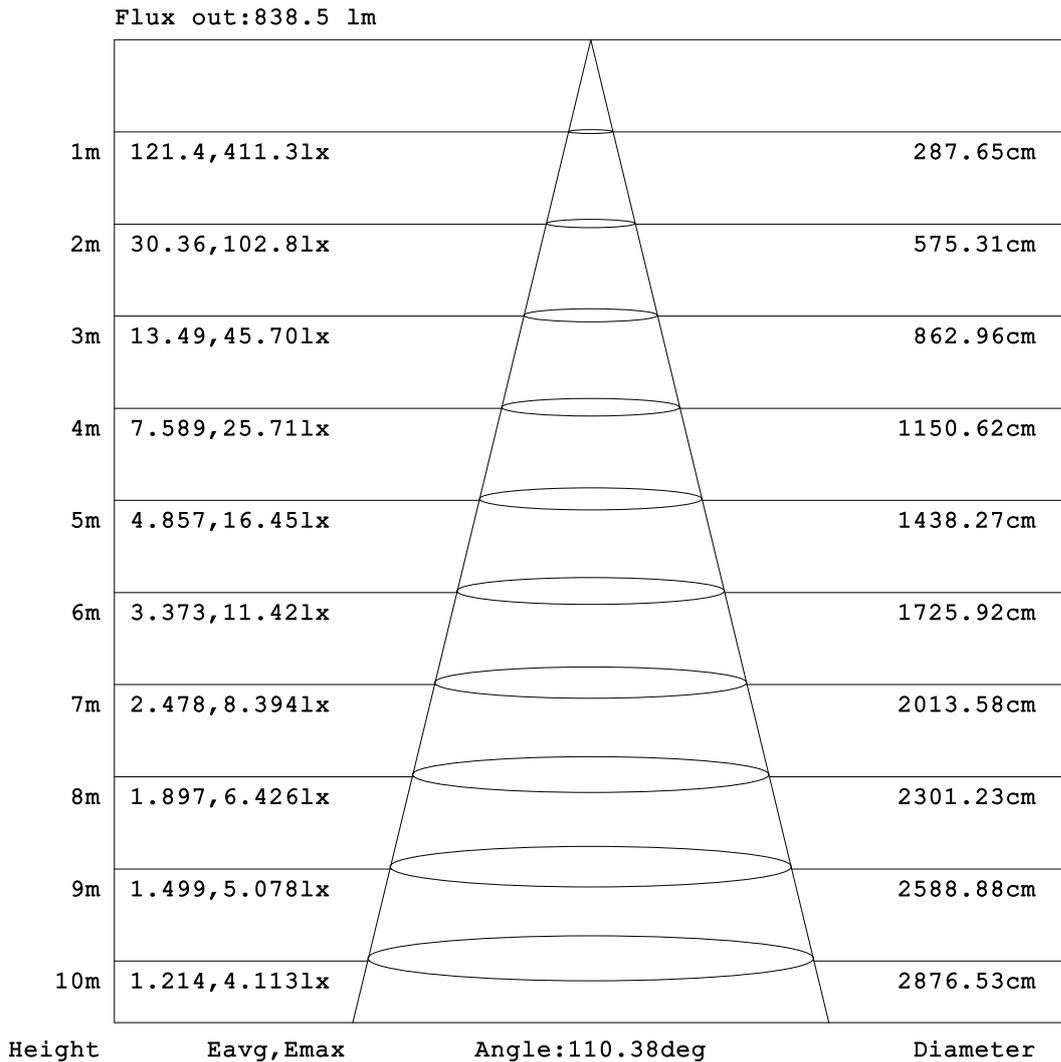


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3°C  
 Operators:  
 Test Date: 2022-06-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

**ISOLUX DIAGRAM**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:

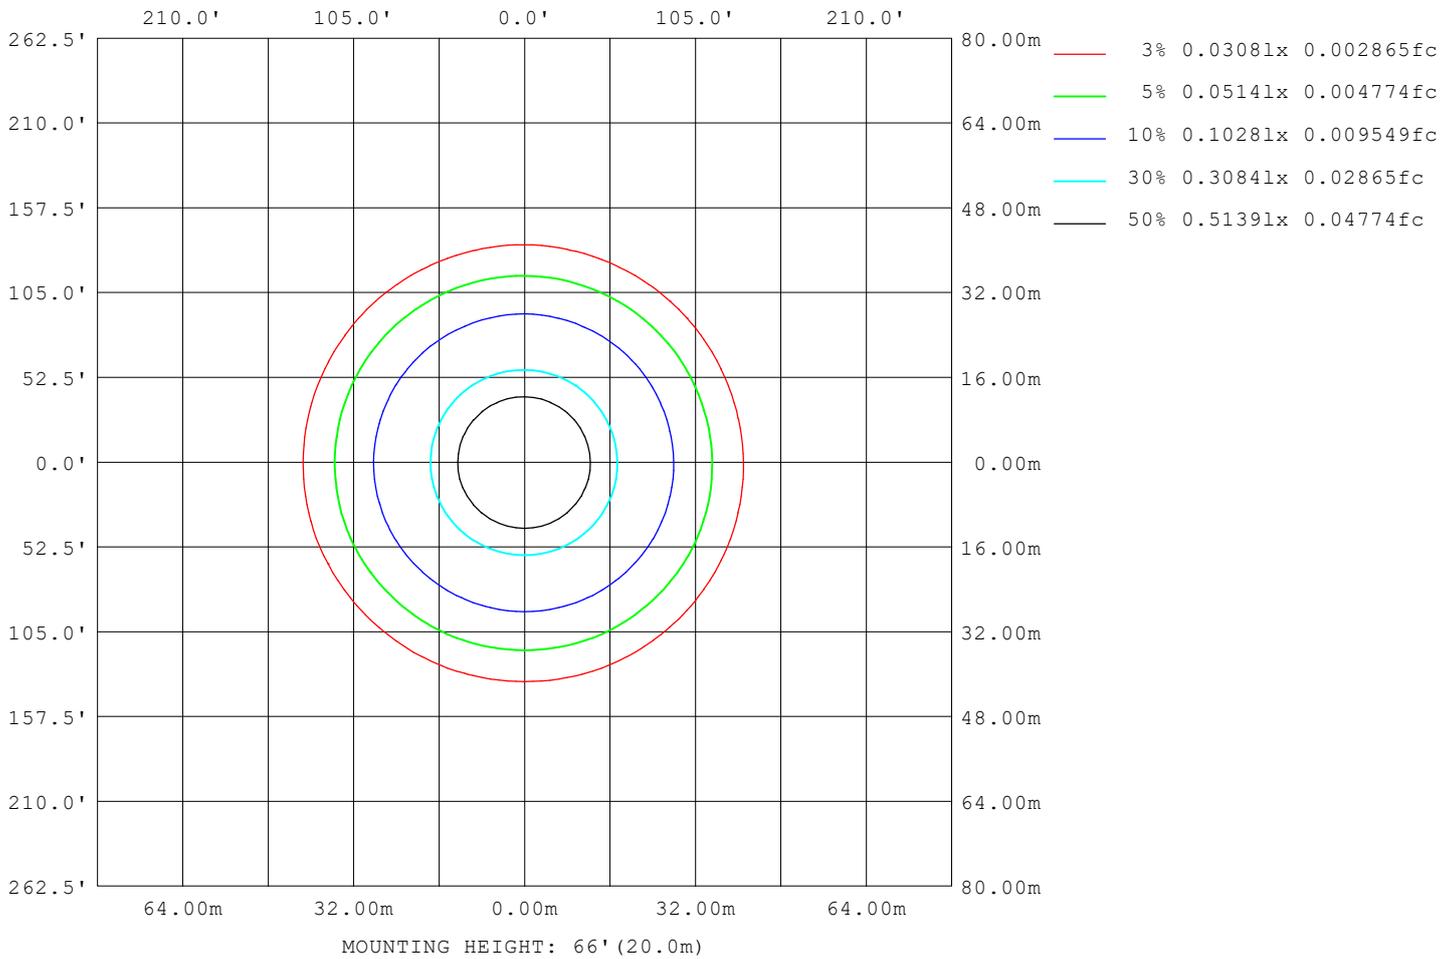

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3°C  
 Operators:  
 Test Date:2022-06-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

**LED Avg.L Report**

Test:U:119.88V I:0.1859A P:14.606W PF:0.6555 Freq:59.98Hz UTHDi:0.00% ITHDi:0.00% KDisp:0 Lamp Flux:1149.28x1 lm		
NAME: LED-SL-PNL-6R-3P15W-5CCT-WH	TYPE:	WEIGHT:
SPEC.: 3500K	DIM.:	SERIAL No.:
MFR.: Envisionled	SUR.:	Shielding Angle:


AvgL	cd/m2
L_0~180 (65) av	3029
L_0~180 (75) av	2685
L_0~180 (85) av	2089
L_90~270 (65) av	3023
L_90~270 (75) av	2609
L_90~270 (85) av	1374
L_45 (65) av	3026
L_45 (75) av	2659
L_45 (85) av	1633

Standard: GB/T 29293-2012

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature:25.3℃  
 Operators:  
 Test Date:2022-06-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System:EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity:65.0%  
 Test Distance:3.090m [K=1.0000]  
 Remarks:

**Planar Illuminance Curve**

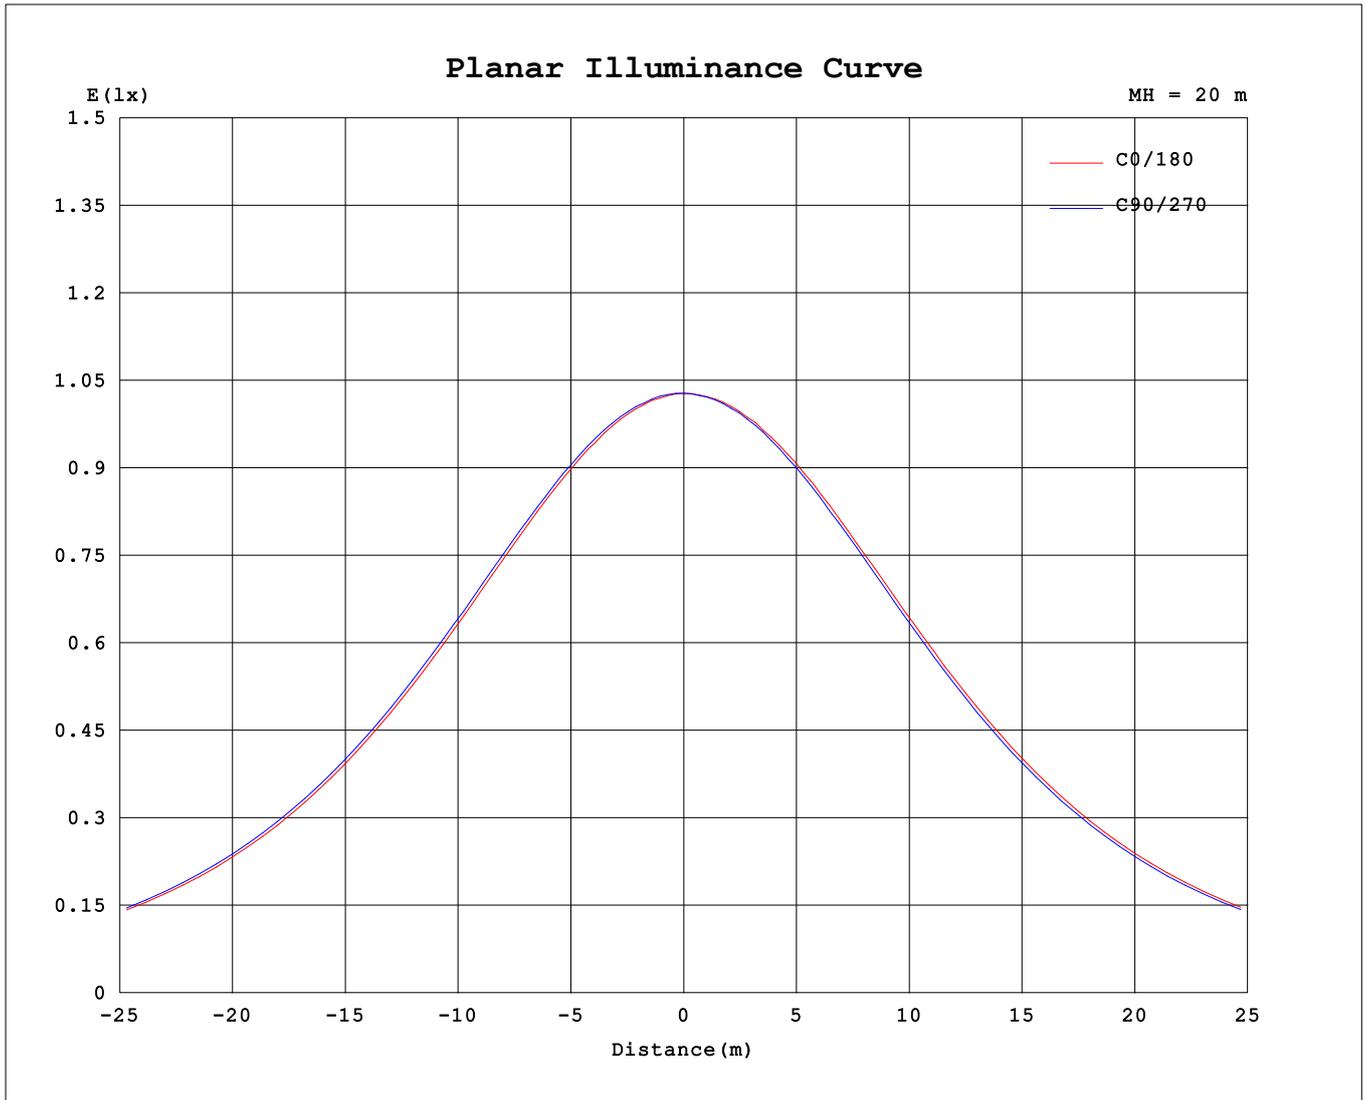

C Range: 0 - 360DEG  
 C Interval: 22.5DEG  
 Test Speed: HIGH  
 Temperature: 25.3 °C  
 Operators:  
 Test Date: 2022-06-20

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-SPEX500\_V1 SYSTEM V2.00.460  
 Humidity: 65.0%  
 Test Distance: 3.090m [K=1.0000]  
 Remarks:

