


SlimLine Surface Mounts

5-CCT Selectable

Surface Mounts

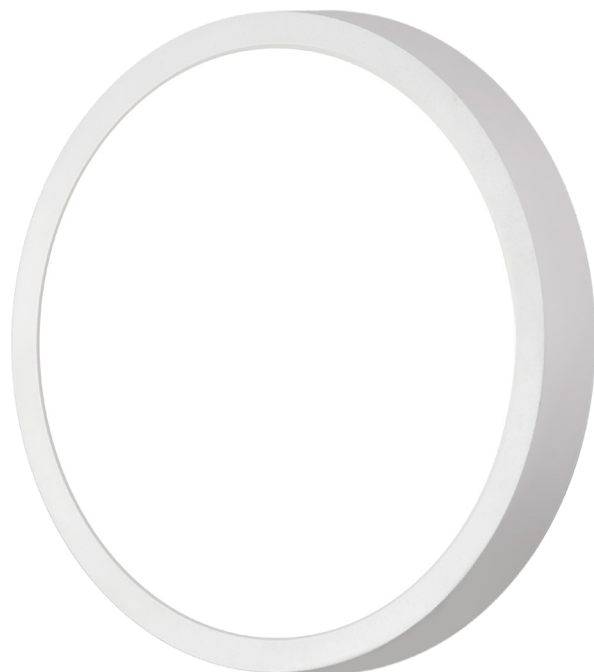

5" / 7" / 9" / 12" / 15" / 19" / 24"

Detail Specifications:

- Finishes: White, Optional Trims
- IP Rating: Wet Location
- 5-CCT: 27/30/35/40/50k
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Housing: Plastic
- Trims: Metal
- Average life (L70) of 50,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

Product Information:

- AC technology: slim and easy driverless installation
- Edge-lit technology: reduces glare with even light distribution
- Standard white round trim included: optional trims available

Driver Options:

- 2 models:
 - 120V Triac Dimmable
 - 120-277V 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

Mounting & Installations:

- 120V Models: 30/40 Junction Box (including pancake j-box)
- 120-277V UNV Models: 30/40 Junction Box
- Surface mount bracket included

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101
- Closet Rated

120V Triac Dimmable

- LED-SLSM-5R-11W-5CCT-WH
11w • 800lm
- LED-SLSM-7R-15W-5CCT-WH
15w • 1,050lm
- LED-SLSM-9R-18W-5CCT-WH
18w • 1,350lm
- LED-SLSM-12R-3P24-5CCT-WH
24/20/18w • 1,800/1,600/1,400lm
- LED-SLSM-15R-3P30-5CCT-WH
30/25/20w • 2,000/1,750/1,500lm
- LED-SLSM-19R-3P35-5CCT-WH
35/30/25w • 2,200/2,000/1,800lm
- LED-SLSM-24R-3P40-5CCT-WH
40/35/30w • 2,700/2,450/2,250lm

120-277V 0-10V Dimmable


- LED-SLSM-5R-3P12-5CCT-WH-UNV
12/8/6w • 1,000/800/600lm
- LED-SLSM-7R-3P15-5CCT-WH-UNV
15/10/7w • 1,250/1,000/675lm
- LED-SLSM-12R-3P24-5CCT-WH-UNV
24/20/18w • 2,000/1,700/1,500lm
- LED-SLSM-15R-3P30-5CCT-WH-UNV
30/25/20w • 2,460/2,220/1,700lm

Optional Accessories (Order Separately)


Round Trims	Emergency Backup	Pendant Stem Mount
SLSM-5R-TRIM-BL	SLSM-7R-EMB-UNV	STM-JBX-6-WH
SLSM-5R-TRIM-BN	Surface mount pancake EMB	6' Stem Mount
SLSM-5R-TRIM-BZ	SLSM-7R-EMB-EMPTY-UNV	(Adjustable length)
SLSM-7R-TRIM-BL	Empty surface mount pancake EMB	White Finish
SLSM-7R-TRIM-BN	SLSM-12R-EMB-UNV	STM-JBX-6-BLK
SLSM-7R-TRIM-BZ	Surface mount pancake EMB	6' Stem Mount
SLSM-9R-TRIM-BL	SLSM-12R-EMB-EMPTY-UNV	(Adjustable length)
SLSM-9R-TRIM-BN	Empty surface mount pancake EMB	Black Finish
SLSM-9R-TRIM-BZ		
SLSM-12R-TRIM-BL		
SLSM-12R-TRIM-BN		
SLSM-12R-TRIM-BZ		
SLSM-15R-TRIM-BL		
SLSM-15R-TRIM-BN		
SLSM-15R-TRIM-BZ		

Specs and model numbers are subject to change with or without notice.


FEATURES

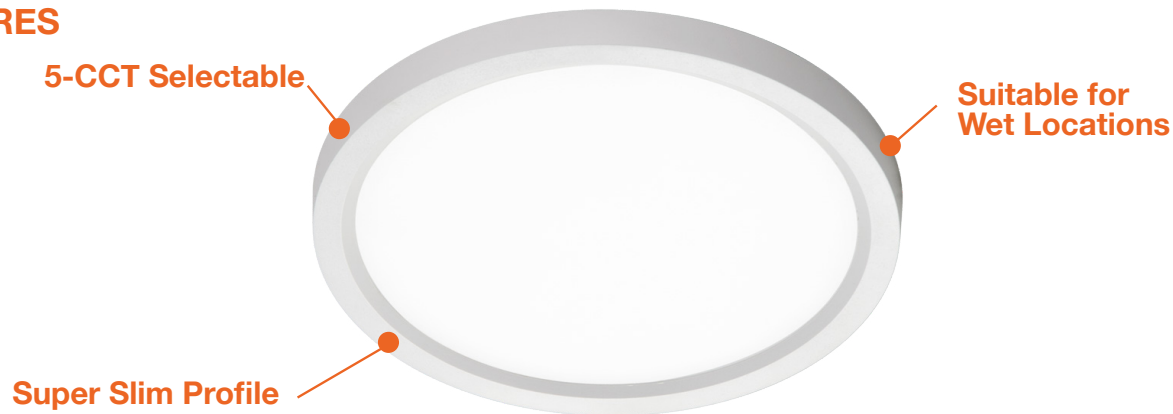

DIMENSIONS

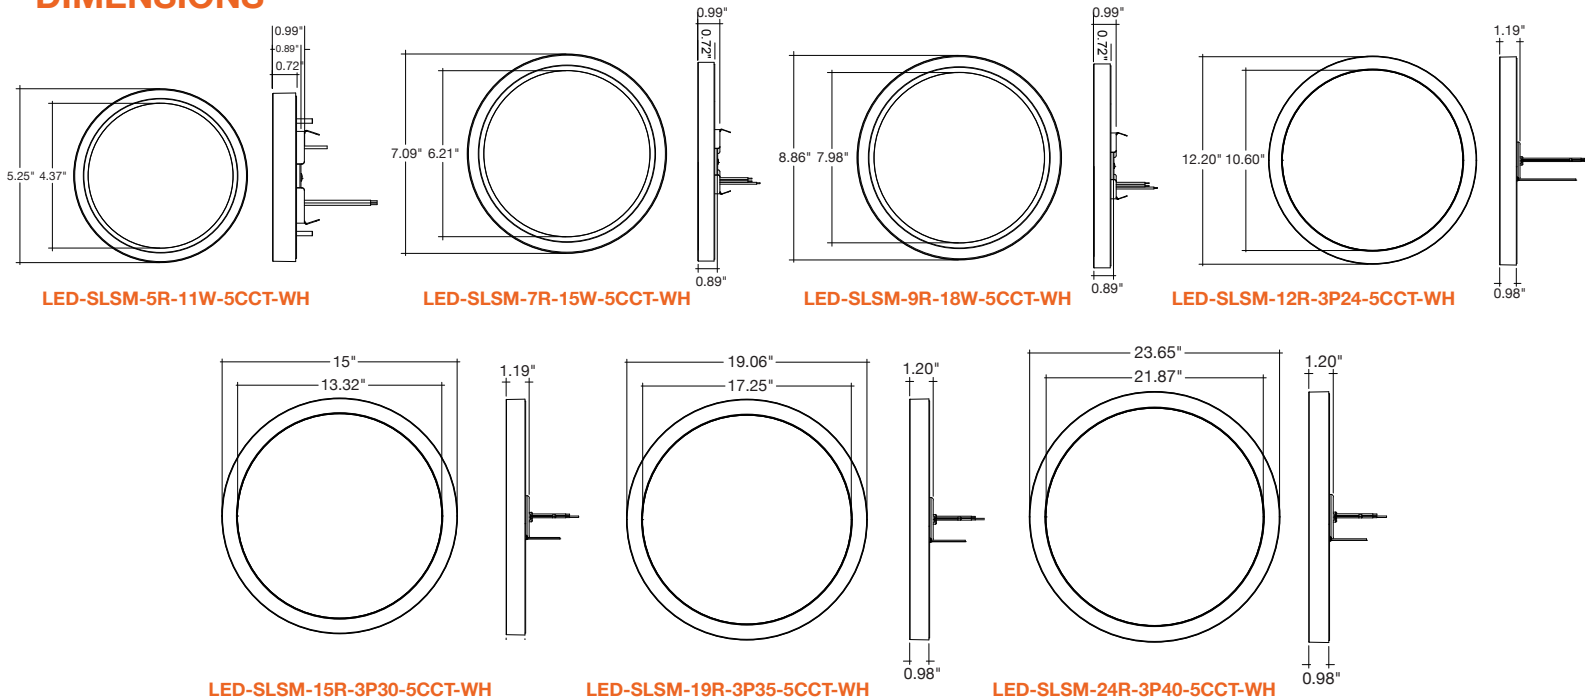

UNV

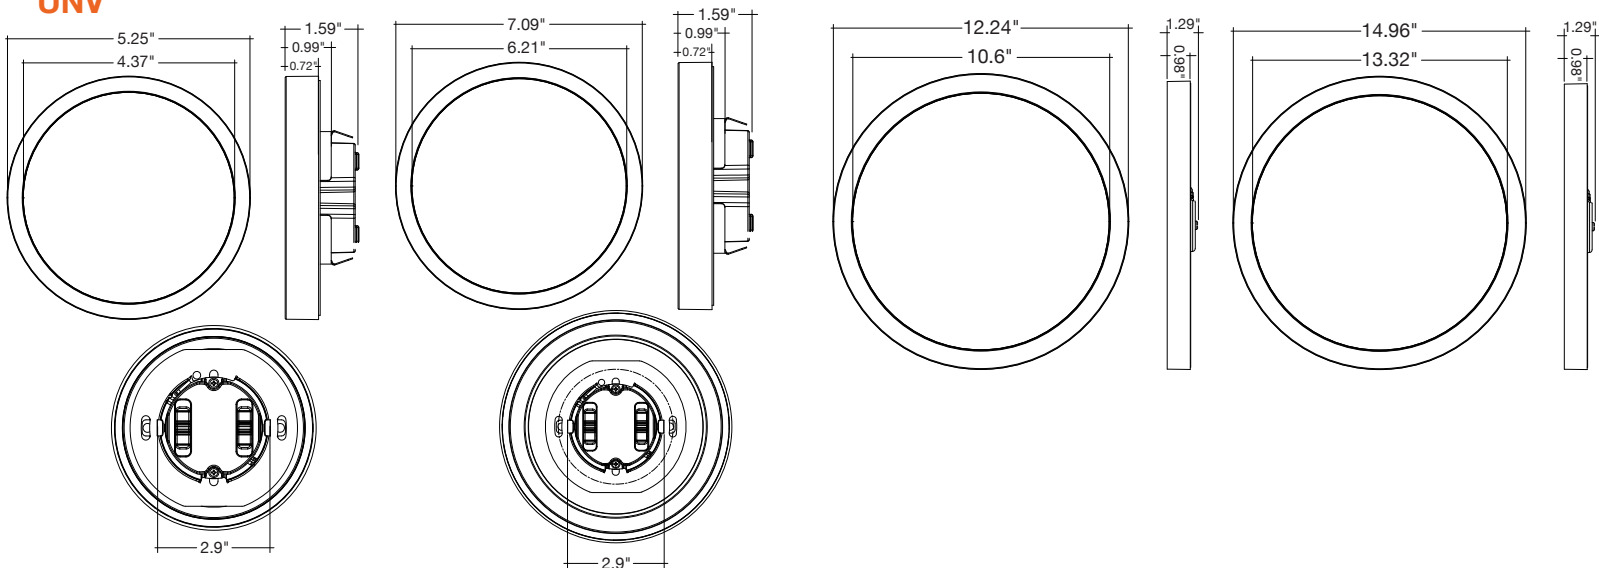

CLIP-ON TRIMS - 5" / 7" / 9" / "12" / 15"



-BN



-BL



-BZ

ACCESSORIES



SLSM-7R-EMB-UNV
SLSM-7R-EMB-EMPTY-UNV



SLSM-12R-EMB-UNV
SLSM-12R-EMB-EMPTY-UNV



30° ANGLE

STM-JBX-6-WH
STM-JBX-6-BLK

Model	Voltage	Watts	Lumens	Color	CRI
LED-SLSM-5R-11W-5CCT-WH	120V	11w	800	27/30/35/40/50k	>90
LED-SLSM-7R-15W-5CCT-WH	120V	15w	1,050	27/30/35/40/50k	>90
LED-SLSM-9R-18W-5CCT-WH	120V	18w	1,350	27/30/35/40/50k	>90
LED-SLSM-12R-3P24-5CCT-WH	120V	24/20/18w	1,800/1,600/1,400	27/30/35/40/50k	>90
LED-SLSM-15R-3P30-5CCT-WH	120V	30/25/20w	2,000/1,750/1,500	27/30/35/40/50k	>90
LED-SLSM-19R-3P35-5CCT-WH	120V	35/30/25w	2,200/2,000/1,800	27/30/35/40/50k	>90
LED-SLSM-24R-3P40-5CCT-WH	120V	40/35/30w	2,700/2,450/2,250	27/30/35/40/50k	>90
LED-SLSM-5R-3P12-5CCT-WH-UNV	120-277V	12/8/6w	2,000	27/30/35/40/50k	>90
LED-SLSM-7R-3P15-5CCT-WH-UNV	120-277V	15/10/7w	2,200	27/30/35/40/50k	>90
LED-SLSM-12R-3P24-5CCT-WH-UNV	120-277V	24/20/18w	2,200	27/30/35/40/50k	>90
LED-SLSM-15R-3P30-5CCT-WH-UNV	120-277V	30/25/20w	2,200	27/30/35/40/50k	>90

FIXTURE, TRIM, & ACCESSORY

Trim Model	Description
SLSM-5R-TRIM-BL	Black 5" Round Trim
SLSM-5R-TRIM-BN	Brushed Nickel 5" Round Trim
SLSM-5R-TRIM-BZ	Bronze 5" Round Trim
SLSM-7R-TRIM-BL	Black 7" Round Trim
SLSM-7R-TRIM-BN	Brushed Nickel 7" Round Trim
SLSM-7R-TRIM-BZ	Bronze 7" Round Trim
SLSM-9R-TRIM-BL	Black 9" Round Trim
SLSM-9R-TRIM-BN	Brushed Nickel 9" Round Trim
SLSM-9R-TRIM-BZ	Bronze 9" Round Trim
SLSM-12R-TRIM-BL	Black 12" Round Trim
SLSM-12R-TRIM-BN	Brushed Nickel 12" Round Trim
SLSM-12R-TRIM-BZ	Bronze 12" Round Trim
SLSM-15R-TRIM-BL	Black 15" Round Trim
SLSM-15R-TRIM-BN	Brushed Nickel 15" Round Trim
SLSM-15R-TRIM-BZ	Bronze 15" Round Trim

EMERGENCY BACKUP

Accessory Model	Description
SLSM-7R-EMB-UNV	Surface mount pancake EMB
SLSM-7R-EMB-EMPTY-UNV	Empty surface mount pancake EMB
SLSM-12R-EMB-UNV	Surface mount pancake EMB
SLSM-12R-EMB-EMPTY-UNV	Empty surface mount pancake EMB

PENDANT STEM MOUNT

Accessory Model	Description
STM-JBX-6-WH	6' Stem Mount (Adjustable length) White Finish
STM-JBX-6-BLK	6' Stem Mount (Adjustable length) Black Finish

Compatible Dimmer List

LUTRON	LEVITON
DVCL-153P	6633-PA
CTCL-153P-WH	6631-PLW
MACL-153M	IPL06-10Z
S2-LH	6674-POW
DV-600P	DSM10-1LZ
DV-603P-LA	6613-PLA
DVELV-300P-AL	
NLV-600-WH	HUBBELL
NTELV-300-WH	RSDL06
SELV-300P	LEGRAND
	HCL453PTCCCV6
	SYNERGY/LEVITON
	ISD 600 120 / IP106