


# SlimLine Surface Mounts

## 5-CCT Selectable

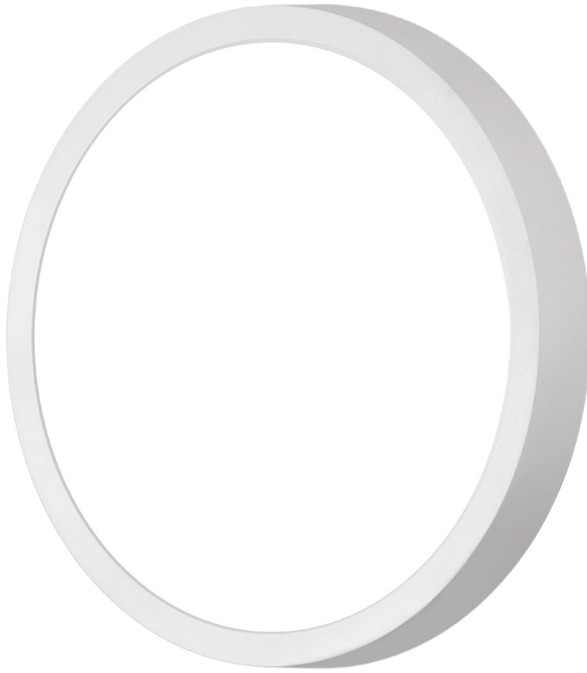

5" / 7" / 9" / 12" / 15" / 19" / 24"

### Detail Specifications:

- Finishes: White, Optional Trims
- IP Rating: Wet Location
- 5-CCT: 27/30/35/40/50k
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted Acrylic, non-yellowing
- Housing: Plastic
  - Trims: Metal
- Average life (L70) of 50,000 hours

### Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality

### Product Information:

- AC technology: slim and easy driverless installation
- Edge-lit technology: reduces glare with even light distribution
- Standard white round trim included: optional trims available

### Driver Options:

- 2 models:
  - 120V Triac Dimmable
  - 120-277V 0-10V Dimmable
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Flicker Free

### Mounting & Installations:

- 120V Models: 30/40 Junction Box (including pancake j-box)
- 120-277V UNV Models: 30/40 Junction Box
- Surface mount bracket included

### Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101
- Closet Rated

#### 120V Triac Dimmable

- LED-SLSM-5R-11W-5CCT-WH  
11w • 800lm
- LED-SLSM-7R-15W-5CCT-WH  
15w • 1,050lm
- LED-SLSM-9R-18W-5CCT-WH  
18w • 1,350lm
- LED-SLSM-12R-3P24-5CCT-WH  
24/20/18w • 1,800/1,600/1,400lm
- LED-SLSM-15R-3P30-5CCT-WH  
30/25/20w • 2,000/1,750/1,500lm
- LED-SLSM-19R-3P35-5CCT-WH  
35/30/25w • 2,200/2,000/1,800lm
- LED-SLSM-24R-3P40-5CCT-WH  
0/35/30w • 2,700/2,450/2,250lm

#### 120-277V 0-10V Dimmable


- LED-SLSM-5R-3P12-5CCT-WH-UNV  
12/8/6w • 1,000/800/600lm
- LED-SLSM-7R-3P15-5CCT-WH-UNV  
15/10/7w • 1,250/1,000/675lm
- LED-SLSM-12R-3P24-5CCT-WH-UNV  
24/20/18w • 2,000/1,700/1,500lm
- LED-SLSM-15R-3P30-5CCT-WH-UNV  
30/25/20w • 2,460/2,220/1,700lm

### Optional Accessories (Order Separately)


| Round Trims      | Emergency Backup                | Pendant Stem Mount  |
|------------------|---------------------------------|---------------------|
| SLSM-5R-TRIM-BL  | SLSM-7R-EMB-UNV                 | STM-JBX-6-WH        |
| SLSM-5R-TRIM-BN  | Surface mount pancake EMB       | 6' Stem Mount       |
| SLSM-5R-TRIM-BZ  | SLSM-7R-EMB-EMPTY-UNV           | (Adjustable length) |
| SLSM-7R-TRIM-BL  | Empty surface mount pancake EMB | White Finish        |
| SLSM-7R-TRIM-BN  | SLSM-12R-EMB-UNV                | STM-JBX-6-BLK       |
| SLSM-7R-TRIM-BZ  | Surface mount pancake EMB       | 6' Stem Mount       |
| SLSM-9R-TRIM-BL  | SLSM-12R-EMB-EMPTY-UNV          | (Adjustable length) |
| SLSM-9R-TRIM-BN  | Empty surface mount pancake EMB | Black Finish        |
| SLSM-9R-TRIM-BZ  |                                 |                     |
| SLSM-12R-TRIM-BL |                                 |                     |
| SLSM-12R-TRIM-BN |                                 |                     |
| SLSM-12R-TRIM-BZ |                                 |                     |
| SLSM-15R-TRIM-BL |                                 |                     |
| SLSM-15R-TRIM-BN |                                 |                     |

Specs and model numbers are subject to change with or without notice.

**FEATURES**

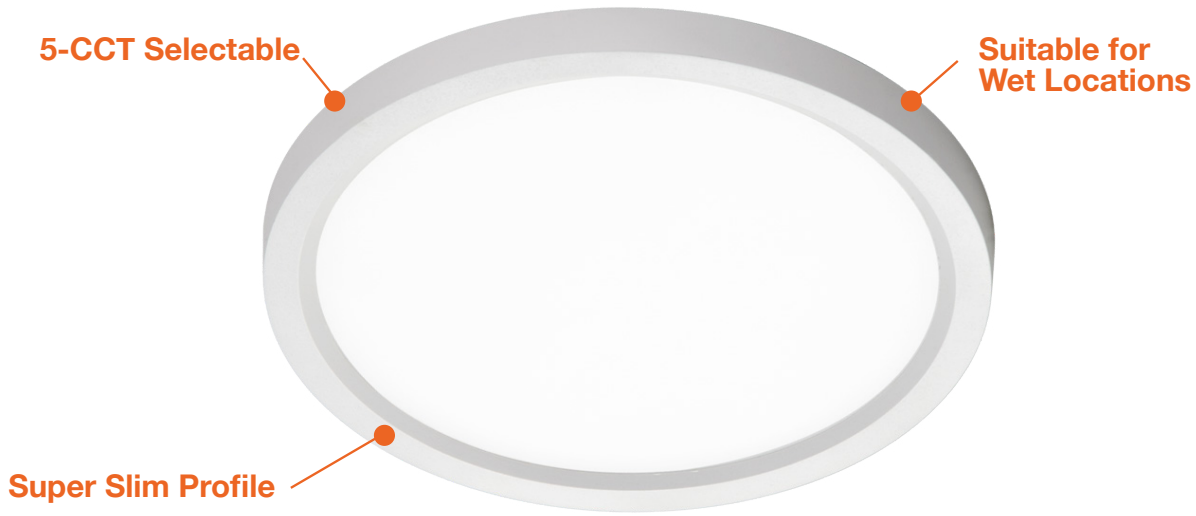

**DIMENSIONS**

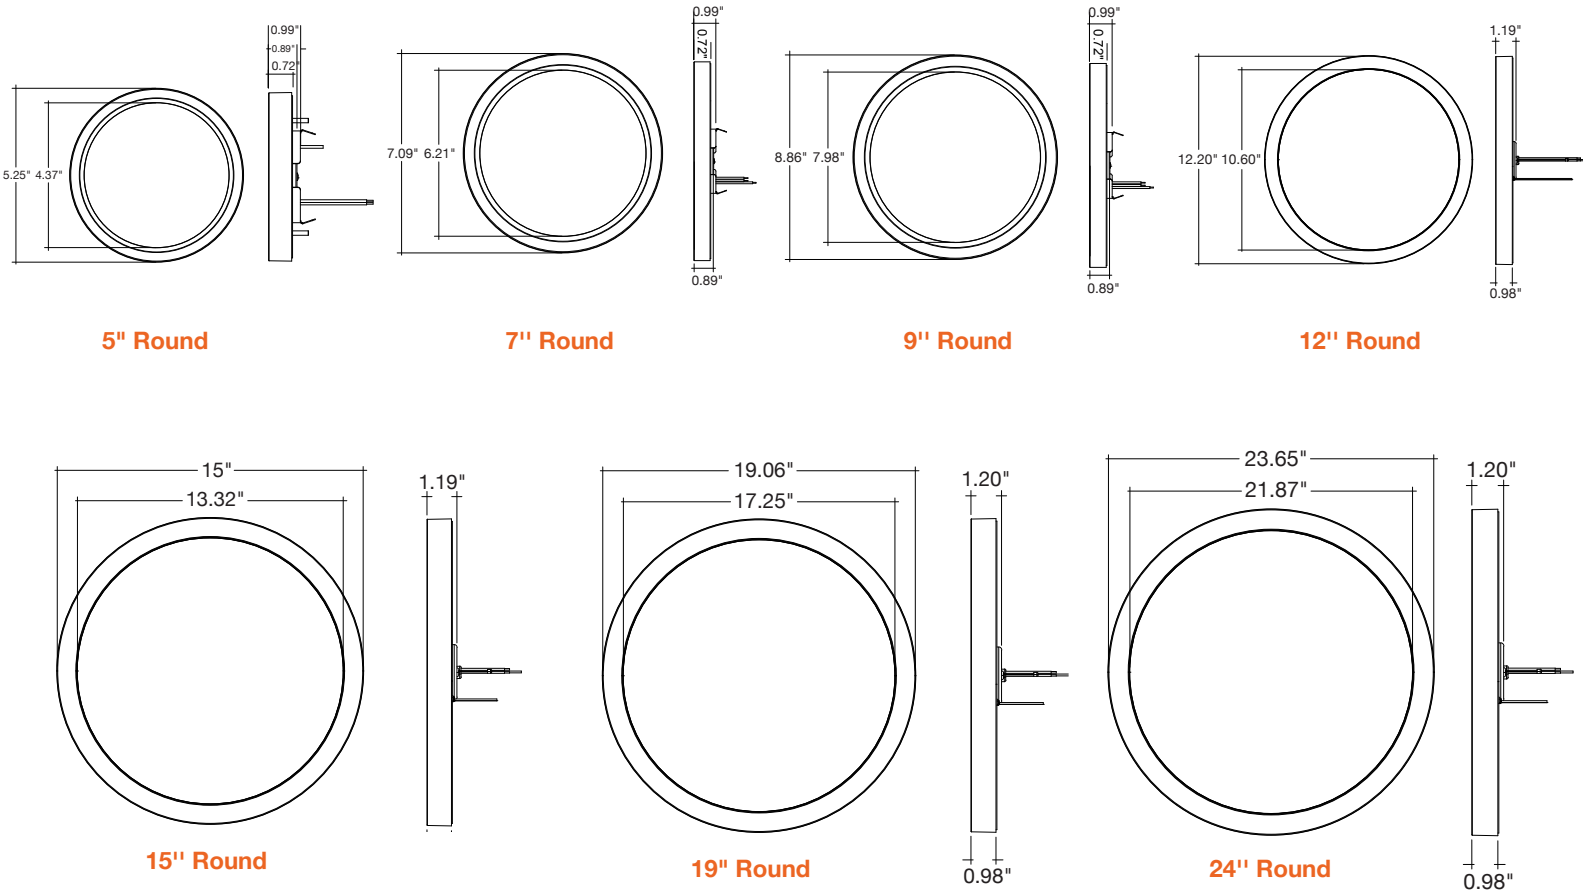

## CLIP-ON TRIMS - 5" / 7" / 9" / 12" / 15"



-BNI



-BLK



-BRZ

## ACCESSORIES



SLSM-7R-EMB-UNV  
SLSM-7R-EMB-EMPTY-UNV



SLSM-12R-EMB-UNV  
SLSM-12R-EMB-EMPTY-UNV



30° ANGLE

STM-JBX-6-WH  
STM-JBX-6-BLK

| Model                         | Voltage  | Watts     | Lumens            | Color           | CRI |
|-------------------------------|----------|-----------|-------------------|-----------------|-----|
| LED-SLSM-5R-11W-5CCT-WH       | 120V     | 11w       | 800               | 27/30/35/40/50k | >90 |
| LED-SLSM-7R-15W-5CCT-WH       | 120V     | 15w       | 1,050             | 27/30/35/40/50k | >90 |
| LED-SLSM-9R-18W-5CCT-WH       | 120V     | 18w       | 1,350             | 27/30/35/40/50k | >90 |
| LED-SLSM-12R-3P24-5CCT-WH     | 120V     | 24/20/18w | 1,800/1,600/1,400 | 27/30/35/40/50k | >90 |
| LED-SLSM-15R-3P30-5CCT-WH     | 120V     | 30/25/20w | 2,000/1,750/1,500 | 27/30/35/40/50k | >90 |
| LED-SLSM-19R-3P35-5CCT-WH     | 120V     | 35/30/25w | 2,200/2,000/1,800 | 27/30/35/40/50k | >90 |
| LED-SLSM-24R-3P40-5CCT-WH     | 120V     | 40/35/30w | 2,700/2,450/2,250 | 27/30/35/40/50k | >90 |
| LED-SLSM-5R-3P12-5CCT-WH-UNV  | 120-277V | 12/8/6w   | 2,000             | 27/30/35/40/50k | >90 |
| LED-SLSM-7R-3P15-5CCT-WH-UNV  | 120-277V | 15/10/7w  | 2,200             | 27/30/35/40/50k | >90 |
| LED-SLSM-12R-3P24-5CCT-WH-UNV | 120-277V | 24/20/18w | 2,200             | 27/30/35/40/50k | >90 |
| LED-SLSM-15R-3P30-5CCT-WH-UNV | 120-277V | 30/25/20w | 2,200             | 27/30/35/40/50k | >90 |

## FIXTURE, TRIM, & ACCESSORY

| Trim Model       | Description                   |
|------------------|-------------------------------|
| SLSM-5R-TRIM-BL  | Black 5" Round Trim           |
| SLSM-5R-TRIM-BN  | Brushed Nickel 5" Round Trim  |
| SLSM-5R-TRIM-BZ  | Bronze 5" Round Trim          |
| SLSM-7R-TRIM-BL  | Black 7" Round Trim           |
| SLSM-7R-TRIM-BN  | Brushed Nickel 7" Round Trim  |
| SLSM-7R-TRIM-BZ  | Bronze 7" Round Trim          |
| SLSM-9R-TRIM-BL  | Black 9" Round Trim           |
| SLSM-9R-TRIM-BN  | Brushed Nickel 9" Round Trim  |
| SLSM-9R-TRIM-BZ  | Bronze 9" Round Trim          |
| SLSM-12R-TRIM-BL | Black 12" Round Trim          |
| SLSM-12R-TRIM-BN | Brushed Nickel 12" Round Trim |
| SLSM-12R-TRIM-BZ | Bronze 12" Round Trim         |
| SLSM-15R-TRIM-BL | Black 15" Round Trim          |
| SLSM-15R-TRIM-BN | Brushed Nickel 15" Round Trim |

## EMERGENCY BACKUP

| Accessory Model        | Description                     |
|------------------------|---------------------------------|
| SLSM-7R-EMB-UNV        | Surface mount pancake EMB       |
| SLSM-7R-EMB-EMPTY-UNV  | Empty surface mount pancake EMB |
| SLSM-12R-EMB-UNV       | Surface mount pancake EMB       |
| SLSM-12R-EMB-EMPTY-UNV | Empty surface mount pancake EMB |

## PENDANT STEM MOUNT

| Accessory Model | Description                                    |
|-----------------|--|
| STM-JBX-6-WH    | 6' Stem Mount (Adjustable length) White Finish |
| STM-JBX-6-BLK   | 6' Stem Mount (Adjustable length) Black Finish |

### Compatible Dimmer List

|               |                        |
|---------------|------------------------|
| <b>LUTRON</b> | <b>LEVITON</b>         |
| DVCL-153P     | 6633-PA                |
| CTCL-153P-WH  | 6631-PLW               |
| MACL-153M     | IPL06-10Z              |
| S2-LH         | 6674-POW               |
| DV-600P       | DSM10-1LZ              |
| DV-603P-LA    | 6613-PLA               |
| DVELV-300P-AL |                        |
| NLV-600-WH    | <b>HUBBELL</b>         |
| NTELV-300-WH  | RSDL06                 |
| SELV-300P     | <b>LEGRAND</b>         |
|               | HCL453PTCCCV6          |
|               | <b>SYNERGY/LEVITON</b> |
|               | ISD 600   120 / IP106  |