



## 2' & 4' Prismatic LED Lens Wraps

The EnVision 2' and 4' LED Prismatic Lens Wraparounds is a 110 lm/w and is primarily used in general lighting environments such as garages, utility rooms, staircases, and more. The wraps can be surface mounted and provide a wide illumination in the space. Available in a wide range of color, 3500k, 4000k or 5000k color temp, find the perfect color temperature to illuminate your space.



Features a spring design allowing easy removal of lens for installation

### Applications:

- Hotel, Hallway, and Lobby Lighting
- Garage and Utility Room Lighting
- Restaurant Lighting
- Office and Meeting Room Lighting

### Product Information:

- Anti-rusting white powder coat
- UL Listed for damp location
- This item is not dimmable
- 120-277V input
- Energy Star

**LED - WRP - PRM - Feet - Watt - Color - Accessories - 5 YR**

1
2
3
4
5
6

|   |  |  |   |   |   |
|---|--|--|---|---|---|
| <p><b>1 Product</b><br/>LED-WRP- Prismatic Lens PRM</p> | <p><b>2 Feet</b><br/>2FT 2 Feet<br/>4FT 4 Feet</p> | <p><b>3 Watt</b><br/>20W 20W / 1,900lm<br/>40W 40W / 3,800lm</p> | <p><b>4 Color</b><br/>35K 3500K<br/>40K 4000K<br/>50K 5000K</p> | <p><b>5 Accessories</b><br/><b>(Blank)</b> None<br/><b>MS</b> Motion Sensor (Internal)<br/><b>BMS</b> Bi-Level Motion Sensor (Internal)<br/><b>EMB</b> Emergency Backup (90 Mins. Internal 15W)</p> | <p><b>6 Warranty</b><br/>5YR 5 Year (incl.)</p> |
|---|--|--|---|---|---|

*Specs and model numbers are subject to change with or without notice*

## FEATURES



**Housing**  
Sturdy aluminum

**Finish**  
Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color

**Lens**  
Prismatic PC Cover

**LEDs**  
Long-life, high-efficiency SMD2835

**Spring Design**

Features a spring design allowing easy removal of lens for installation

### Listings

**ETL Listing :**  
Suitable for damp location.

### IESNA LM-79 & IESNA LM-80 Testing

This product has been tested by an independent laboratory in accordance with IESNA LM-79 and 80 and have received the Department of Energy Lighting Facts label

### LED Characteristics

**Lifespan :**  
50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculation

**LEDs :**  
Long-life, high-efficiency SMD2835, patent free.

**Color Uniformity:**  
CCT(Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.388-2015


**IP Rating :**  
Damp location

**Finish :**  
Our environmentally friendly polyester powder coatings are formulated for high-durability and long-lasting color, and contain no VOC or toxic heavy metals

**Green Technology:**  
Mercury and UV free RoHS compliant components Polyester powder coat finish formulated without the use of VOC or toxic heavy metals

**2' Prismatic Lens Wraparound Dimensions**

60.2mm (2.37")

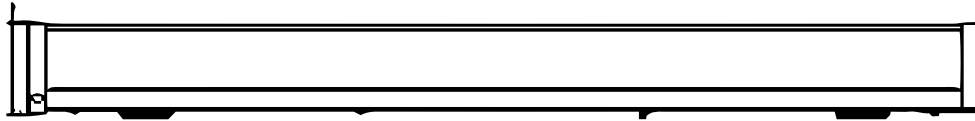


631mm (24.84")



131.2mm (5.17")


131.2mm (5.17")

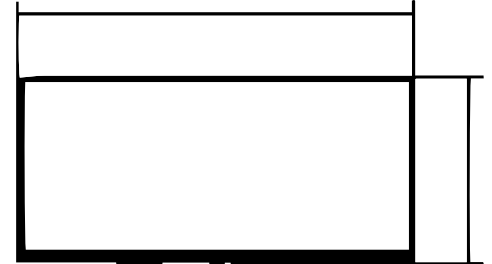


60.2mm (2.37")

**4' Prismatic Lens Wraparound Dimensions**

1238mm (48.74")

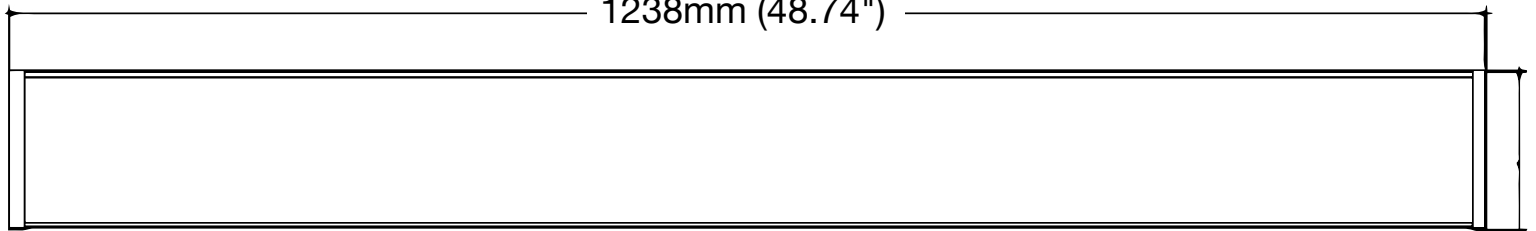


131.2mm (5.17")

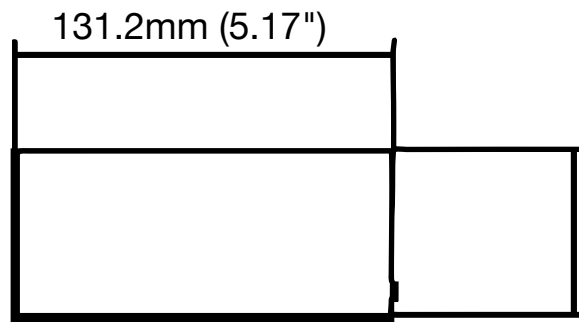


60.2mm (2.37")


## 2' PRISMATIC LENS WRAPAROUND PHOTOMETRICS

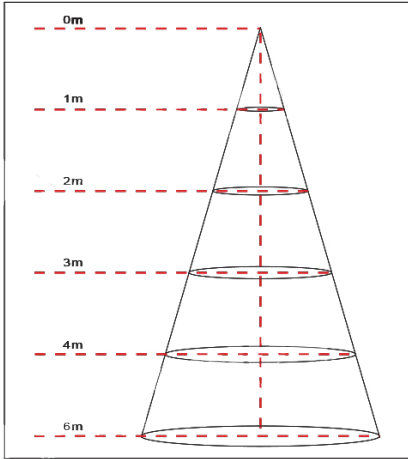

| Height | Average Lux (lx) | Light range (dia.) |
|--------|------------------|--------------------|
| 1M     | 308.9            | 208.66cm           |
| 2M     | 77.2             | 417.32cm           |
| 3M     | 34.3             | 525.99cm           |
| 4M     | 19.3             | 834.65cm           |
| 6M     | 12.4             | 1043.31cm          |

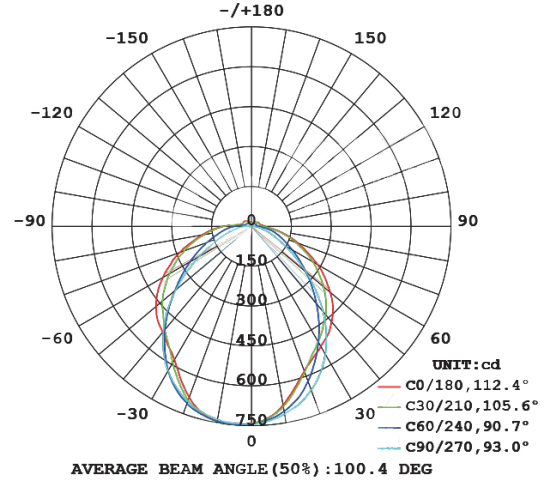

## 4' PRISMATIC LENS WRAPAROUND PHOTOMETRICS

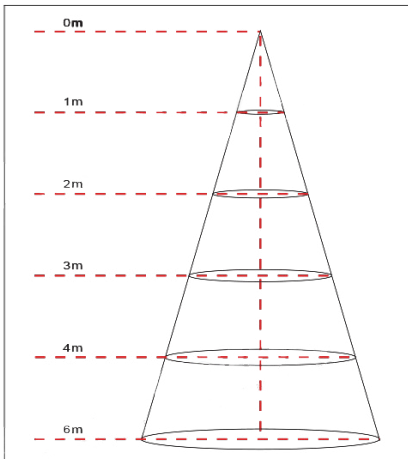

| Height | Average Lux (lx) | Light range (dia.) |
|--------|------------------|--------------------|
| 1M     | 595.6            | 215.07cm           |
| 2M     | 148.9            | 430.13cm           |
| 3M     | 66.2             | 645.2cm            |
| 4M     | 37.2             | 860.26cm           |
| 6M     | 23.8             | 1075.33cm          |

