


# 1001 LED 25 Watt Wide Area Work Light

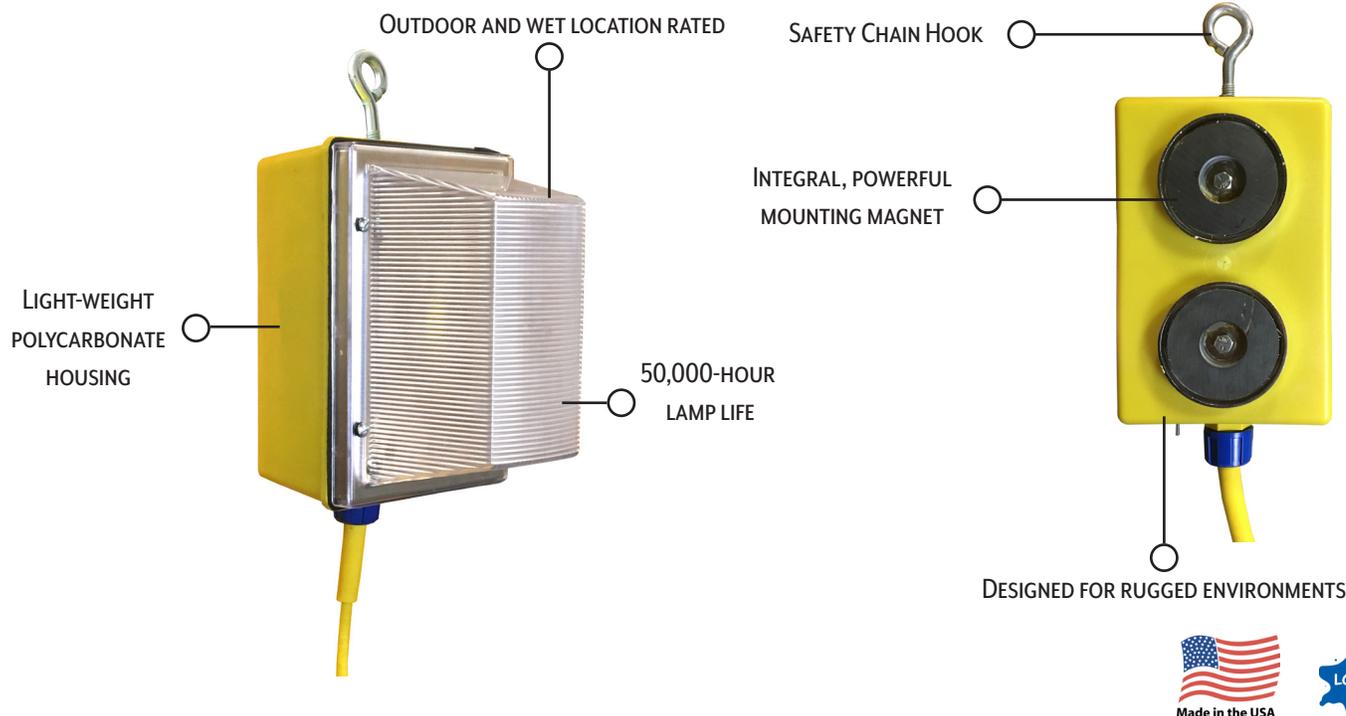

## Standard Features

- LED efficient lighting technology
- 5000K color temperature
- 3400 lumens
- Durable and rugged construction
- Impact and high temperature resistant lens
- Easily daisy chained to cover large areas
- NEMA 5-15 watertight plug included
- Made in USA

## Product Options

- Optional on/off switch
- Optional weather resistant receptacle with flip cover
- Available in 6, 25 and 50 ft cord lengths


## Applications

- Tent Lighting
- Utility Maintenance
- Construction
- Emergency Lighting
- Food / Beverage
- Aerospace
- Defense / Safety
- Petrochem
- Ship Building
- Tunnel Lighting

## Related Products



RFID  
tagging services



IES lighting  
layout simulation




1.800.ERICSON · ericson.com · info@ericson.com



## Selection Guide:

| Product Number | Product Description  |
|----------------|--|
| 100ILED-6      | Lamp with 6 ft cord and Perma-Tite®2 Plug (1510 PW6P)  |
| 100ILED-6S     | Lamp with 6 ft cord, Perma-Tite®2 Plug (1510 PW6P) and switch  |
| 100ILED-6R     | Lamp with 6 ft cord, flip seal cover w/ weatherproof boot only (2715-FS10)   |
| 100ILED-6RS    | Lamp with 6 ft cord, flip seal cover w/ weatherproof boot only (2715-FS10) and switch                                    |
| 100ILED-25     | Lamp with 25 ft cord and Perma-Tite®2 Plug (1510 PW6P)   |
| 100ILED-25S    | Lamp with 25 ft cord, Perma-Tite®2 Plug (1510 PW6P) and switch   |
| 100ILED-25R    | Lamp with 25 ft cord, Perma-Tite®2 Plug (1510 PW6P) and flip seal cover w/ weatherproof boot only (2715-FS10)            |
| 100ILED-25RS   | Lamp with 25 ft cord, Perma-Tite®2 Plug (1510 PW6P) and flip seal cover w/ weatherproof boot only (2715-FS10) and switch |
| 100ILED-50     | Lamp with 50 ft cord and Perma-Tite®2 Plug (1510 PW6P)   |
| 100ILED-50S    | Lamp with 50 ft cord, Perma-Tite®2 Plug (1510 PW6P) and switch   |
| 100ILED-50R    | Lamp with 50 ft cord, Perma-Tite®2 Plug (1510 PW6P) and flip seal cover w/ weatherproof boot only (2715-FS10)            |
| 100ILED-50RS   | Lamp with 50 ft cord, Perma-Tite®2 Plug (1510 PW6P) and flip seal cover w/ weatherproof boot only (2715-FS10) and switch |

| Product Specifications               |                          |
|--------------------------------------|--------------------------|
| Electrical ratings                   | 100-277 VAC              |
| Amperage draw                        | 0.4 A                    |
| Primary cord length                  | See ordering information |
| Ballast location                     | Main body                |
| Wet location rating                  | Yes                      |
| Cable guage/type                     | 14/3 SJ00W / 16/3 SJ00W  |
| Bulb type                            | LED panel                |
| Lumens                               | 3400 Lumens              |
| CRI (Color Rendation Index)          | 80                       |
| Color temperature (Kelvins)          | 5000K                    |
| Average rated bulb life (Hours)      | 50,000                   |
| Low temp start                       | -30° C                   |
| Fixture weight (Excluding the cable) | 5 pounds                 |

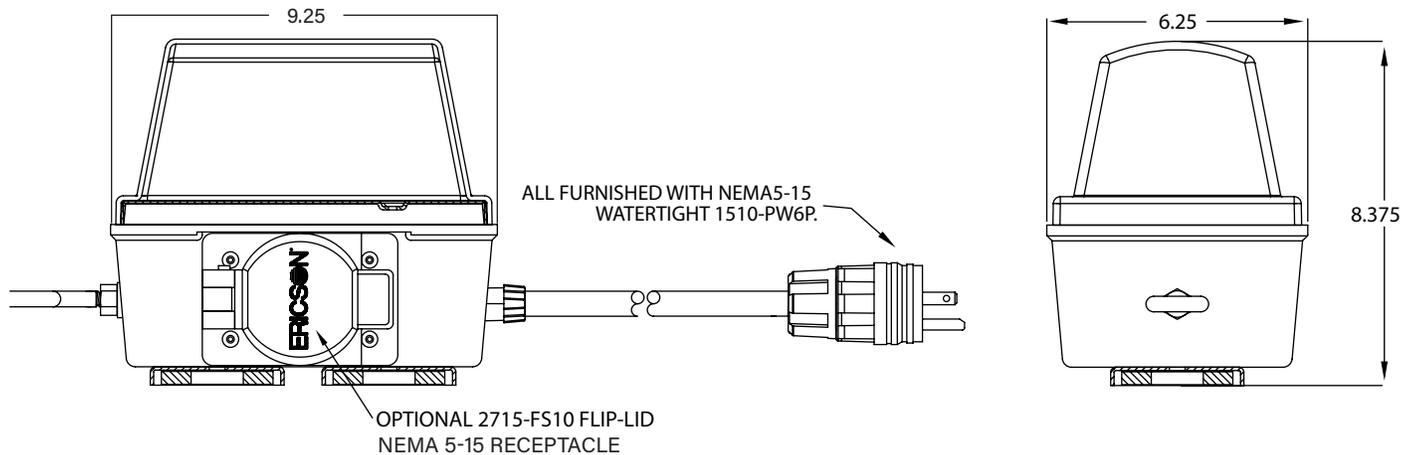

Ericson Manufacturing Company  
4323 Hamann Parkway  
Willoughby, OH 44094, USA



1.800.374.2766  
info@ericson.com  
ericson.com  
L1000748C