


# 1239-6F-LED

WIDE AREA TASK LIGHT, 1239 SERIES 85W LED , 6FT OF  
14/3 SJOW CABLE W/ NEMA 5-15P & SEC = NEMA 5-15C. MAX  
CONNECT = 15 FIXTURES PER CIRCUIT



EXPRESS BUILD

## Key features

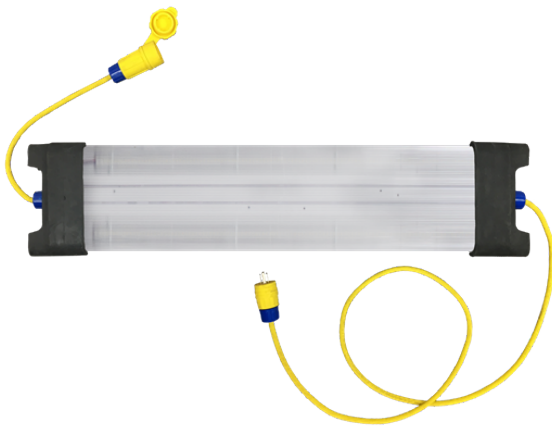

- High efficient LED Array and Driver.
- Lightweight, heavy duty and impact resistant material.
- Ends are designed for cable egress to prevent cable pinching. when unit is storage or used in a vertical orientation
- Available Emergency drive and battery provides 10% of rated lumens for 90 minutes.
- Battery provides egress light for 90 minutes minimum.
- Cool white and glare free LED for reduced eye stress.
- Made in USA.

---

|              |       |
|--------------|-------|
| <b>Color</b> | Black |
|--------------|-------|

---

|                 |              |
|-----------------|--------------|
| <b>UPC Code</b> | 782862902004 |
|-----------------|--------------|

---

|                          |     |
|--------------------------|-----|
| <b>Country of Origin</b> | USA |
|--------------------------|-----|

## Specifications

---

|              |         |
|--------------|---------|
| <b>Brand</b> | Ericson |
|--------------|---------|

---

|                 |                  |
|-----------------|------------------|
| <b>Category</b> | Industrial Grade |
|-----------------|------------------|

---

|                     |                 |
|---------------------|-----------------|
| <b>Sub Category</b> | Wide Area Light |
|---------------------|-----------------|

## Technical Info

|                            |   |
|----------------------------|---|
| <b>Bulb Type</b>           | LED   |
| <b>Lumens</b>              | 12100   |
| <b>Cable Length</b>        | 6   |
| <b>Cable</b>               | 14/3  |
| <b>Cable Type</b>          | SOW   |
| <b>Max Amps</b>            | 12  |
| <b>Max Volts</b>           | 100-277   |
| <b>Max Watts</b>           | 1500  |
| <b>Primary Cable End</b>   | NEMA 5-15 (1510-PW6P) Water Tight Plug  |
| <b>Secondary Cable End</b> | NEMA 5-15 (1610-CW6P) Water Tight Connector   |
| <b>NEMA Environment</b>    | Outdoor Use, Wet Location   |
| <b>Construction</b>        | Designed for Demanding Environments, Rugged Indoor/Outdoor, Non-Conductive/Corrosive Handles, Extreme Temperature Ratings |

## Standards & Certifications

|             |                                   |
|-------------|-----------------------------------|
| <b>ETL</b>  | ETL listed to UL153               |
| <b>cETL</b> | cETL listed to CSA C22.2 No.250.4 |

## Shipping & Logistics Info

|                                       |            |
|---------------------------------------|------------|
| <b>Pack/Unit Qty</b>                  | 1          |
| <b>HTS code</b>                       | 9405408440 |
| <b>ECCN</b>                           | EAR99      |
| <b>Gross Weight (lbs)</b>             | 14.00000   |
| <b>Pallet Qty</b>                     | 100        |
| <b>Shipment Packaging Length (in)</b> | 27         |
| <b>Warranty</b>                       | 1 Year     |

## Accessories



**PART#:** 1140-LS



**PART#:** 1239-MAG



**PART#:** FS-FOOT



**PART#:** FS-PIVOT



Ericson Manufacturing Company  
4323 Hamann Parkway  
Willoughby, OH 44094, USA



1-800-374-2766  
info@ericson.com

ericson.com