

EXTREME ALL WEATHER

PERMA-TITE® 2

- Tongue & groove sealing system provides environmental protection of:
 - NEMA Type 4, 4X, 6, 6P & IP67
- Devices resist high-pressure hose down of 1,000 psi.
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C - + 100°C
- Selected models available with Ground Continuity Monitor
- Removable/replaceable self-retained sealing cap provided with connector to keep out contaminants when not in use



6P
SUBMERSIBLE



BEST

PERMA-GRIP™

- Quick field assembly
- Water/mud/dust resistance provided by safety compression cord grips
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C - + 100°C
- Selected models available with Ground Continuity Monitor
- Flexibility of reverse-cover design (straight blade devices) creates weather-resistant connections by interchanging covers



BETTER

PERMA-LINK®


- Two-screw cable clamp secures wire and provides strain-relief
- Withstand high impact, corrosion, oils, greases, solvents and other chemicals across -20 °C - + 100°C
- Individual wire pockets help prevent flashovers
- Selected models available with Ground Continuity Monitor
- Flexibility of reverse-cover design creates weather-resistant connections by interchanging covers



GOOD

Commercial Grade

- Translucent body allows device to glow from power on lamp
- Wide open "suitcase" style construction makes wiring easy
- Fits 10/3 to 18/3 cord diameters*
- Rugged design withstands abuse on the jobsite
- Color coded termination screws for ground, hot and neutral
- Combo screw head

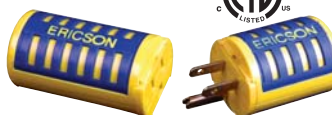

Since 1918
ERICSON®

We Energize, Illuminate, Protect & Connect

Ericson NEMA Chart		EXTREME	BEST	BETTER	GOOD	SMART	Smart Monitor*		Single Outlet	Dual Recept (PWX)						
Face View	NEMA	Electrical Ratings		PERMA-TITE® 2		PERMA-GRIP™		PERMA-LINK®		Economy Grade*		Smart Monitor*		Single Outlet	Dual Recept (PWX)	
	Configuration	Amps	Volts	Plugs	Connectors	Plugs	Connectors	Plugs	Connectors	Plugs	Connectors	Plugs	Connectors	FS Cover Plates	Receptacle with Cover	
2-pole, 3-Wire Grounding																
	5-15	15	125	1510-PW6P	1610-CW6P	1510-PG	1610-CG	1510-P	1610-C	5266-E	5269-E	1510-PXX	1610-CXX	2715-FS10	1610-PWDX	
	5-20	20	125	1512-PW6P	1612-CW6P	1512-PG	1612-CG	1512-P	1612-C	Note: Lighted power-on glow models also: 5266-EL & 5269-EL		1512-PXX	1612-CXX	2715-FS12	1612-PWDX	
	6-15	15	250	1514-PW6P	1614-CW6P	1514-PG	1614-CG	1514-P	1614-C			2715-FS14	1614-PWDX			
	6-20	20	250	1516-PW6P	1616-CW6P	1516-PG	1616-CG	1516-P	1616-C			2715-FS16	1616-PWDX			
	L5-15	15	125	1520-PW6P	1620-CW6P	1520-PG	1620-CG	1520-P	1620-C			2715-FS20	1620-PWDX			
	L6-15	15	250	1522-PW6P	1622-CW6P	1522-PG	1622-CG	1522-P	1622-C			2715-FS22	1622-PWDX			
	L7-15	15	277	1524-PW6P	1624-CW6P	1524-PG	1624-CG	1524-P	1624-C	2715-FS24	1624-PWDX	6200 Series Boxes For FS Series & PWDX Series • Rubberized • Fully Enclosed • Single and Double Sided • Standard and Deep				
	L5-20	20	125	2310-PW6P	2410-CW6P	2310-PG	2410-CG	2310-P	2410-C	2310-PXX	2410-CXX			2820-FS10	2820-FS12	
	L6-20	20	250	2312-PW6P	2412-CW6P	2312-PG	2412-CG	2312-P	2412-C	2820-FS14	2820-FS16			2820-FS17		
	L7-20	20	277	2314-PW6P	2414-CW6P	2314-PG	2414-CG	2314-P	2414-C	2820-FS20	2820-FS22			2820-FS24		
	Non-NEMA	20	125/250	2316-PW6P	2416-CW6P	2316-PG	2416-CG	2316-P	2416-C	2920-FS20	2920-FS22			2920-FS24		
3-Pole, 3-Wire Non-Grounding																
	Non-NEMA	20	125/250	2317-PW6P	2417-CW6P	2317-PG	2417-GC	2317-P	2417-C							
	Non-NEMA	20/10	250/600	2318-PW6P	2418-CW6P	2318-PG	2418-GC	2318-P	2418-C							
	Non-NEMA	15A/10A	125V/250V	1507-PW6P	1607-CW6P	1507-PG	1607-CG	1507-P	1607-C							
3-Pole, 4-Wire Grounding																
	L14-20	20	125/250	2320-PW6P	2420-CW6P			2320-P	2420-C							
	L15-20	20	250, 3Ø	2322-PW6P	2422-CW6P			2322-P	2422-C							
	L16-20	20	480, 3Ø	2324-PW6P	2424-CW6P			2324-P	2424-C							
2-Pole, 3-Wire Grounding																
	L5-30	30	125	2510-PW6P	2610-CW6P	2510-PG	2610-CG	2510-P	2610-C							
	L6-30	30	250	2512-PW6P	2612-CW6P	2512-PG	2612-GC	2512-P	2612-C							
	L7-30	30	277	2514-PW6P	2614-CW6P	2514-PG	2614-CG	2514-P	2614-C							
3-Pole, 3-Wire Non-Grounding																
	Non-NEMA	30	125/250	2516-PW6P	2616-CW6P			2516-P	2616-C							
3-Pole, 4-Wire Grounding																
	L14-30	30	125/250 3Ø	2520-PW6P	2620-CW6P			2520-P	2620-C							
	L15-30	30	250, 3Ø	2522-PW6P	2622-CW6P			2522-P	2622-C							
	L16-30	30	480, 3Ø	2524-PW6P	2624-CW6P			2524-P	2624-C							
	L17-30	30	600, 3Ø	2526-PW6P	2626-CW6P			2526-P	2626-C							
4-Pole, 4-Wire																
	L18-30	30	120/208 3Ø wye	2530-PW6P	2630-CW6P			2530-P	2630-C							
4-Pole, 4-Wire Non-Grounding																
	Non-NEMA	30	120/208 3Ø wye	2528-PW6P	2628-CW6P			2528-P	2628-C							

* 5266-EL & 5269-EL = Lighted


***Part Number Note for Smart Monitors:**

PLUGS (-PXX)

- PML** Perma-Link® Style
- PMGL** Perma-Grip™ Style
- PW6PL** Perma-Tite®2 Style

CONNECTORS (-CXX)

- CML** Perma-Link® Style
- CMGL** Perma-Grip™ Style
- CW6PL** Perma-Tite®2 Style

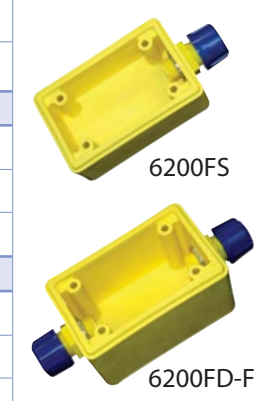

Smart Monitor Plugs & Connectors

Constantly Monitor These Conditions:


- Power On
- No Ground
- Loss of Ground In Cord
- Hot/Neutral Swap
- Reverse Polarity
- Hot on Ground
- Open Neutral



Features:

- Super Bright LED Technology
- Smart Monitor Module
- Keyed body and cover
- Easy to wire
- Dual color LEDs

BLUE OK TO USE

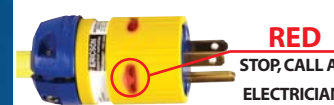

Cord Clamp Style



Cord Grip Style



Water Tight Style



Single & Double Outlet Receptacle with Cover Plates - FS Series & PWDX

- Weather resistant boot seals around Ericson Perma-Tite plug to provide weather resistant protection
- Spring-loaded flip-lid covers receptacle when not in use
- Includes cover plate, rubber boot, stainless steel mounting plate/mounting screws
- Impact, chemical & corrosion resistant construction stands up to demanding environments
- Mounts easily to 6200 series FS/FD boxes and any flat surface

* FS Series listed as PWDX is under investigation

50-Amp Devices

Face View	NEMA	Electrical Ratings		Perma-Link®		Receptacles	Flanged Inlets	Inlet with Flip Cover
	Configuration	Amps	Volts	Plugs	Connectors			
Locking, 2-pole, 3-wire Grounding								
	Non-NEMA	50	250VDC, 600VAC	3763-P	3762-C	3771	3777	
Locking, 3-pole, 4-wire Grounding								
	Non-NEMA	50	250VDC, 600VAC	3765-P	3764-C	3769	3775	
			250VDC, 600VAC	7765-P(1)	7764-C(1)	7379	7958	
Locking, California Style, 2-pole, 3-wire Grounding								
	Non-NEMA	50	125	CS6361-P	CS6360-C	-	-	
			250	CS8265-P	CS8264-C	CS8269	CS8275	
			480	CS8465-P	-	CS8469	-	
Locking, California Style, 3-pole, 4-wire Grounding								
	Non-NEMA	50	125/250	CS6365-P	CS6364-C	CS6369	CS6375	CS6375-F
			480, 3Ø	CS8165-P	CS8164-C	CS8169	CS8175	

*Specs in red = Oscar™/Spider Box connections.



Ericson "PWDX" Series

Duplex All Weather Receptacles and Flip Covers

- Spring Loaded Covers
- Lock Out Tabs
- Collar Plug Seal



Plug into Oscar™