




## TUFFTRAXX™ Series Cable Protectors

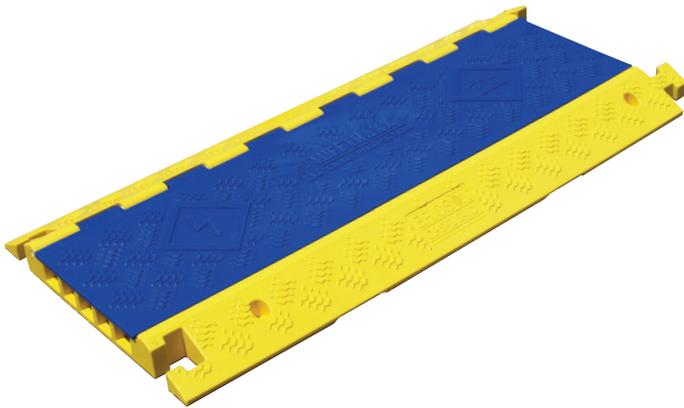

**CP5-36-ID : 21,000 Lbs / Axle**  
**CP5-36-ED : 40,500 Lbs / Axle**

### FEATURES:

- Industrial and Extreme Duty Service Ratings
- Load Ratings Up To 40,500 Lbs/axle
- Y-Adapters Deliver 45° and 90° Cable Routing
- Customizable to Match Corporate Branding Style
- Non-conductive Shock Barrier Protection
- Rounded Dividers Protect Cables From Snags and Tears
- T-style Connector Interlocks for Secure Operation
- Hinged Lid for Easy Cable Loading
- Rugged, All-weather Polyurethane Construction
- Tread Plate Surface for Increased Traction
- Clearly Identifiable Molded Safety Warning Symbols
- Tapered End Caps Provide Gradual Egress
- Light-weight Design for Easy Handling and Storage
- Meets NEC & OSHA Requirements
- Large Capacity (1.3 inch) Linear Sections

Ericson's TuffTraxx Series of Industrial Duty and Extreme Duty Cable Protectors deliver unmatched security and protection against cable and hose damage. Easy to install and reconfigure, the non-metallic TuffTraxx Series shields interconnect cabling from harmful equipment traffic, thus minimizing expensive down-time and repairs. Flexible Y-Adapters offer exceptional cable routing flexibility ideal for large diameter cable or multi-directional cable runs.

Protecting pedestrian traffic from dangerous trip hazards, whether at the work site or during public events, has never been easier than with this safe and affordable solution. Constructed from light-weight, durable polyurethane and tested to rigorous quality and operational standards, these products are built to withstand years of punishing service without compromised performance.

TuffTraxx Industrial and Extreme Duty Cable Protectors feature a compact, flexible design that simplifies setup and transportation making them ideal for a wide range of applications including:

- Oil / Gas Exploration
- Digital / Telecommunications
- Mining Operations
- Stadiums / Racetracks / Arenas
- Oil / Gas Refineries
- Defense / Safety
- Carnivals and Fairs
- Universities / Schools
- Construction
- Utility Maintenance
- Rental Services
- Convention /Theaters
- Entertainment Venues
- Sporting Events
- Transportation
- Aerospace / Airports

**Made in  
the USA** 

# TUFFTRAXX Series Cable Protectors

## SPECIFICATIONS

### Material:

Straight section, end caps, Y-adapter	UV Stabilized Polyurethane
Hinge	Reinforced Fiberglass

### Operating Temperature Range:

-40 °F to +120 °F (-40 °C to +49 °C)


### Maximum Load per Tire (straight section):

CP5-36-ID	10,500 lbs. @ 70 °F (4,763 kg. @ 21 °C)
CP4-36-ED, CP5-36-ED	20,250 lbs. @ 70 °F (4,763 kg. @ 21 °C):


### Maximum Load per Axle (straight section):

CP5-36-ID	21,000 lbs. @ 70 °F (4,763 kg. @ 21 °C)
CP4-36-ED, CP5-36-ED	40,500 lbs. @ 70 °F (4,763 kg. @ 21 °C):

Catalog Number	Description	A-Length	B-Width	C-Height	D-Channel Width	E-Channel Height	Weight
CP5-36-ID	Industrial Duty 5-slot, 36" straight section	36" (914.4mm)	17.25" (438.2mm)	1.95" (50mm)	1.3" (33mm)	1.3" (33mm)	22 lbs (9.97903 kg)
CP4-36-ED	Extreme Duty 4-slot, 36" straight section	36" (914.4mm)	19.5" (495.2mm)	2.25" (64mm)	1.9" (48mm)	1.3" (33mm)	25 lbs (11.33981 kg)
CP5-36-ED	Extreme Duty 5-slot, 36" straight section	36" (914.4mm)	19.5" (495.2mm)	2.25" (64mm)	1.4" (36mm)	1.3" (33mm)	25 lbs (11.33981 kg)

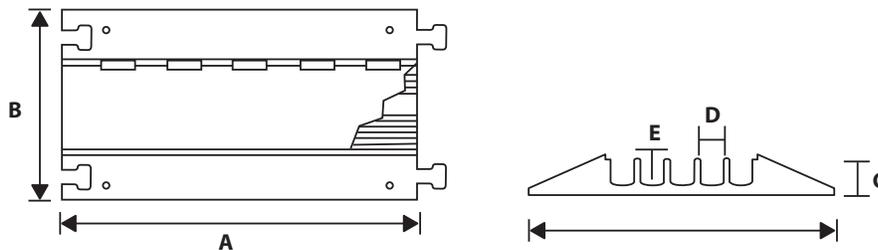

Catalog Number	Description	A-Length	B-Width	C-Height	D-Channel Width	E-Channel Height	Weight
CP5-45Y-ID	Industrial Duty 5-Channel, "Y" Adapter	20" (508.3mm)	17.25" (438.2mm)	1.95" (50mm)	1.3" (33mm)	1.3" (33mm)	11 lbs
CP4-45Y-ED	Extreme Duty 4-Channel, "Y" Adapter	23" (584.1mm)	19.5" (495.2mm)	2.25" (64mm)	1.9" (48mm)	1.3" (33mm)	15 lbs
CP5-45Y-ED	Extreme Duty 5-Channel, "Y" Adapter	23" (584.1mm)	19.5" (495.2mm)	2.25" (64mm)	1.4" (36mm)	1.3" (33mm)	15 lbs
CP5-ECP-ID	Industrial Duty 5-Channel End Cap (Pair)	4.75" (120mm)	17.25" (438.2mm)	1.95" (50mm)	1.3" (33mm)	1.3" (33mm)	2.7 Lbs.
CP4-ECP-ED	Extreme Duty 4-Channel End Cap (Pair)	Male: 5.25" (133mm) Female: 7.5" (190mm)	19.5" (495.2mm)	2.25" (64mm)	1.9" (48mm)	1.3" (33mm)	3.5 Lbs.
CP5-ECP-ED	Extreme Duty 5-Channel End Cap (Pair)	Male: 5.25" (133mm) Female: 7.5" (190mm)	19.5" (495.2mm)	2.25" (64mm)	1.9" (48mm)	1.3" (33mm)	3.5 Lbs.

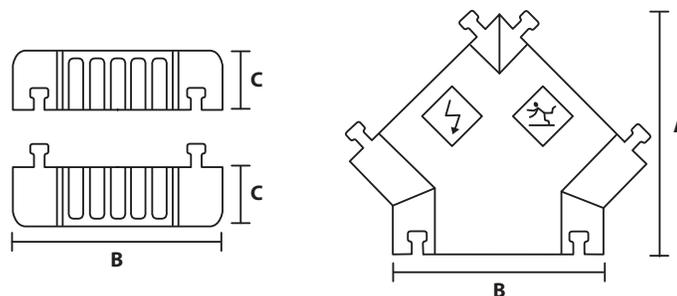

### ERICSON MANUFACTURING COMPANY

4215 Hamann Parkway Willoughby, Ohio 44094 U.S.A  
 Toll Free: 1-800-ERICSON (374-2766) • Phone: (440)951-8000 • Fax: (440)951-1867  
 E-mail: info@ericson.com • Website: www.ericson.com