



FEATURES:

- UL Listed, CSA Certified, cETLus Listed
- Rugged nylon construction resists impact, corrosion and jobsite oils/chemicals
- Quick field assembly, no need to disassemble the entire device
- Nickel plated blades and stainless steel screws provide optimum corrosion resistance
- Optional heavy-duty weather-proof boots are available and provide added environmental protection and UV resistance
- Boots can be threaded together with the optional sealing collar system to provide maximum environmental protection
- Available in plugs, connectors, inlets and receptacles

Face View	NEMA	Electrical Ratings		Perma-Link®		Receptacles	Flanged Inlets	Inlet with Flip Cover
	Configuration	Amps	Volts	Plugs	Connectors			
Locking, 2-pole, 3-wire Grounding								
	Non-NEMA	50	250VDC, 600VAC	3763-P	3762-C	3771	3777	
Locking, 3-pole, 4-wire Grounding								
	Non-NEMA	50	250VDC, 600VAC	3765-P	3764-C	3769	3775	
			250VDC, 600VAC	7765-P(1)	7764-C(1)	7379	7958	
Locking, California Style, 2-pole, 3-wire Grounding								
	Non-NEMA	50	125	CS6361-P	CS6360-C	-	-	
			250	CS8265-P	CS8264-C	CS8269	CS8275	
			480	CS8465-P	-	CS8469	-	
Locking, California Style, 3-pole, 4-wire Grounding								
	Non-NEMA	50	125/250 480, 3Ø	CS6365-P CS8165-P	CS6364-C CS8164-C	CS6369 CS8169	CS6375 CS8175	CS6375-F

Notes:


1. For replacement use only, not recommended for new installations
2. Contact factory for custom assemblies

Sealing Collar System

Our exclusive sealing collar system is available to provide maximum moisture protection between cordsets. The two boots are securely sealed together with threaded polycarbonate rings.

Perma-Link® 50-Amp Accessories	Cat. Number
Weatherproof boot for plug or connector	7717
Sealing Collar for weatherproof boots	510-RR
Weatherproof receptacle cover	7788-CR

Note: 7717 & 510-RR not compatible with 6365P & 6364C

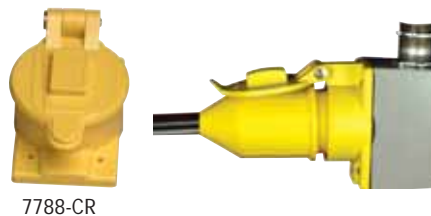

7717 Provides A Superior Seal With Our SR-50 Receptacle

