


Product Features:

- cULus Listed for Damp Locations
- Wide Operating Temperature Range of 4°F to 95°F
- 1–10v Dimming
- Optional Emergency Battery Backup



IC RATED

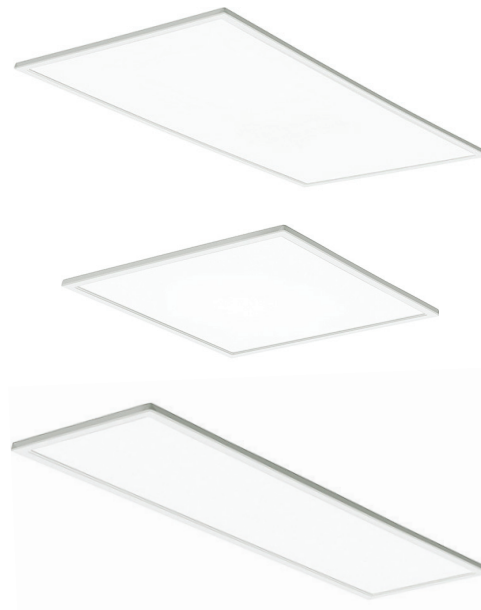

Ordering Guide:

Example Part Number: ESLC-DP-24-U-P-40-35K-80-D-EL

ESLC	DP		U	P				80	D
ESLC	TYPE	SIZE	INPUT VOLTAGE	LISTING	WATTAGE	KELVIN		CRI	DIMMING
	DP (FLAT PANEL)	24 (2X4 FLAT PANEL) 22 (2X2 FLAT PANEL) 14 (1X4 FLAT PANEL)	U (120–277 VAC)	P (DLC PREMIUM)	2X4 FLAT PANEL 40 (40 WATT) 50 (50 WATT) 2X2 FLAT PANEL 36 (36 WATT) 50 (50 WATT) 1X4 FLAT PANEL 30 (30 WATT)	2X4 FLAT PANEL – 40W 35 (3500K) 40 (4000K)	2X2 FLAT PANEL – 36W 35 (3500K) 40 (4000K)	80	D (1–10V)
						2X4 FLAT PANEL – 50W 35 (3500K) 40 (4000K) 50 (5000K)	2X2 FLAT PANEL – 50W 35 (3500K) 40 (4000K) 50 (5000K)		
							1X4 FLAT PANEL – 30W 35 (3500K) 40 (4000K)		

Accessories (field installed):

EMERGENCY BBU:
EL (EMG BATTERY BACKUP - 90 MIN EMERGENCY EGRESS ILLUMINATION)
MOUNTS:
ESLC-DP-SMF-24-W (2X4 SURFACE MOUNT KIT, WHITE FINISH)
ESLC-DP-SMF-22-W (2X2 SURFACE MOUNT KIT, WHITE FINISH)
ESLC-DP-SMF-14-W (1X4 SURFACE MOUNT KIT, WHITE FINISH)
ESLC-DP-SMF-12-S (2' CABLE SUSPENSION MOUNT KIT)
ESLC-DP-SMF-14-S (4' CABLE SUSPENSION MOUNT KIT)

Product Specifications:

Construction:

White finished aluminum frame. Steel die-formed back enclosure.

Optical:

- PMMA lenses over LEDs, PS diffuser
- UGR < 22
- SDCM < 5
- 120° Beam angle

Catalog Data:

2X4 PANEL	ITEM#	WATTAGE	LUMEN OUTPUT	EFFICACY (LM/W)	KELVIN
	ESLC-DP-24-U-P-40-35K-80-D	40W	5,000	125	3500K
	ESLC-DP-24-U-P-40-40K-80-D	40W	5,100	128	4000K

2X4 PANEL	ITEM#	WATTAGE	LUMEN OUTPUT	EFFICACY (LM/W)	KELVIN
	ESLC-DP-24-U-P-50-35K-80-D	50W	6,250	125	3500K
	ESLC-DP-24-U-P-50-40K-80-D	50W	6,375	128	4000K
	ESLC-DP-24-U-P-50-50K-80-D	50W	6,375	128	5000K

2X2 PANEL	ITEM#	WATTAGE	LUMEN OUTPUT	EFFICACY (LM/W)	KELVIN
	ESLC-DP-22-U-P-30-35K-80-D	30W	3,750	125	3500K
	ESLC-DP-22-U-P-30-40K-80-D	30W	3,825	128	4000K

2X2 PANEL	ITEM#	WATTAGE	LUMEN OUTPUT	EFFICACY (LM/W)	KELVIN
	ESLC-DP-22-U-P-36-35K-80-D	36W	4,500	125	3500K
	ESLC-DP-22-U-P-36-40K-80-D	36W	4,590	128	4000K
	ESLC-DP-22-U-P-36-50K-80-D	36W	4,590	128	5000K

1X4 PANEL	ITEM#	WATTAGE	LUMEN OUTPUT	EFFICACY (LM/W)	KELVIN
	ESLC-DP-14-U-P-30-35K-80-D	30W	3,750	125	3500K
	ESLC-DP-14-U-P-30-40K-80-D	30W	3,825	128	4000K

Dimensions:

