



T∞
INFINITE

Ti VAPOR TIGHT SERIES
OUTDOOR AND INDOOR LED FIXTURES



HIGH QUALITY MANUFACTURING



ESL Vision's Vapor Tight Series is durable enough for the most challenging of environments while providing excellent light distribution and energy savings. All 5 body types boast stainless steel latches on a rugged fiberglass housing and are Buy American Compliant.



HIGH QUALITY CONSTRUCTION

- Rugged Fiberglass 5(VA) Rated Housing
- Highest Rated Flame Retardant: UL94 Rated
- All Internal Electronics and Sensors
- Ideal for Food and Beverage Processing Facilities and Other Sanitary Environments
- Marine Grade Stainless Steel Latches and 316 Mounting Brackets Come Standard



BUILT FOR DURABILITY

- Rated UL Wet Location, IP67, High Pressure
- Washdown up to 1500PSI, NEMA 4X Housing
- High-Temperature Silicon Perimeter Gasket
- Suitable for Corrosive Environments



ELECTRICAL

- Universal 120–277 VAC
- Up to 22,903 Lumens
- 13W–180W Options
- 80,000 Hour LED Lifespan
- CRI >82

OPTICS

- 100% Impact Resistant Polycarbonate Lens
- Protects Internally-Mounted Electrical Options
- UV Stabilized
- 3000K, 3500K, 4000K & 5000K Options

OPTIONS

- Photocell & Occupancy Capable
- Vandal Proof — Located Inside The Fixture
- Remote Programmable
- Internal Emergency Backup Up to 1,100 lumens
- Internal Surge Protective Device Optional




ORDERING GUIDE & SPECS

ESL	-	Ti(HO)	-	VP(z)(p)	-	S	-	(yy)W	-	F	-	(xx)	-	OPTIONS
ESL	-	TYPE	-	SERIES	-	LISTING	-	WATTS	-	LENS	-	KELVIN	-	


OPTIONS/ACCESSORIES

ESL-CS3W-6	Cord Set, White, 3 wire, 6 foot
ESL-CS3W-6P	Cord Set, White, 3 wire, 6 foot, Standard Plug
ESL-CS3W-6TL	Cord Set, White, 3 wire, 6 foot, Twist lock Plug
ESL-CS3W-12	Cord Set, White, 3 wire, 12 foot
ESL-CS3W-12P	Cord Set, White, 3 wire, 12 foot, Standard Plug
ESL-CS3W-12TL	Cord Set, White, 3 wire, 12 foot, Twist lock Plug
ESL-SPD-300V-10KV-1	Hard Wire Surge Protector; (100–300VAC) Max Discharge Current: 10kA
ESL-SPD-480V-10KV-1	Hard Wire Surge Protector; (480 VAC) Max Discharge Current: 10kA
ESL-480V-SD01	480 Volt Step Down Transformer
ESL-4OCC-LDD	Occupancy Sensor, 0–10V Dimming, 8'–20' Mounting
ESL-3OCC	IP65 0–10V Dimming Sensor. 8'–50' Mounting, Wire From Side
ESL-REM-100	Hand Held Remote
ESL-VP-CM-VP4S	Direct Mount to the Ceiling for the 4' single fixture (2 Included)
ESL-VP-CM-VP4x	Direct Mount to the Ceiling for the 2', 4', and 8' narrow and wide body fixture (2 Included)
ESL-VP-45DM-VP4x	45° Mount for the 2', 4', and 8' narrow and wide body fixture (2 Included)
ESL-VP-PM-VP4x	Pendent Mount 3/8" standard (2 Included)
ESL-VP-CH-VP4x	Chain Hang CT-Bail (2 Included)
ESL-VP-VH-VP4x	VaporTight High Bay V hook (2 Included)
ESL-VP-PM-VP4x	VaporTight High Post Mount (2 Included)
ESL-VP-CM-VP4x	VaporTight High Ceiling Mount (2 Included)
ESL-VPSS	Stainless Steel Latches (2'=6 latches) (4'=8 latches) (VPHB=12 latches)
ESL-EMG-SL1-OTB-9W	9 Watts Output, 90 Minutes Min, 120–277VAC Input, 10–300VDC Output, Open Terminal Block Wiring
ESL-EMG-SL2-CLW-5W	5 Watts Output, 90 Minutes Min, 120–277VAC Input, 20–250VDC Output, Closed Lead Wiring


Single Ti
Normal Distribution




Double Ti
Normal Distribution




Double Ti
Wide Distribution



Triple Ti
Normal Distribution



Ti Vapor Tight High Bay
Normal Distribution
4, 5 and 6 Ti Configurations




	SERIES	PART NUMBER	MAX lm/W	MAX LUMENS PER FIXTURE	AVAILABLE WATTAGES (yy)	AVAILABLE KELVIN (xx)
2'	Ti-VP2N	ESL-Ti-VP2N-S-yyW-Fxx	110	2,918	20W 30W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
	Ti-VP2W	ESL-Ti-VP2W-S-yyW-Fxx	110	2,918	20W 30W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
4'	Ti-VP4S	ESL-Ti-VP4S-S-yyW-Fxx	129	2,700	13W 15W 18W 22W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
	Ti-VP4N	ESL-Ti-VP4N-S-yyW-Fxx	128	7,978	26W 30W 36W 44W 39W 45W 54W 66W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
	Ti-VP4W	ESL-Ti-VP4W-S-yyW-Fxx	125	5,439	26W 30W 36W 44W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
	TiHO-VP4S	ESL-TiHO-VP4S-S-30W-Fxx	114	3,621	30W	4000K (40) 5000K (50)
4' HIGH OUTPUT	TiHO-VP4N	ESL-TiHO-VP4N-S-yyW-Fxx	109	9,745	60W 90W	4000K (40) 5000K (50)
	TiHO-VP4W	ESL-TiHO-VP4W-S-60W-Fxx	117	7,190	60W	4000K (40) 5000K (50)
8'	Ti-VP8N	ESL-Ti-VP8N-S-yyW-Fxx	125	10,888	26W 30W 36W 44W 52W 60W 72W 88W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
	Ti-VP8W	ESL-Ti-VP8W-S-yyW-Fxx	125	10,888	52W 60W 72W 88W	3000K (30) 3500K (35) 4000K (40) 5000K (50)
8' HIGH OUTPUT	TiHO-VP8N	ESL-TiHO-VP8N-S-yyW-Fxx	117	14,383	60W 120W	4000K (40) 5000K (50)
	TiHO-VP8W	ESL-TiHO-VP8W-S-120W-Fxx	117	14,383	120W	4000K (40) 5000K (50)
HB	TiHO-VPHB	ESL-TiHO-VPHB-S-yyW-Fxx	122	22,093	120W 150W 180W	4000K (40) 5000K (50)




*Not All Part Numbers DLC Qualified. For a Complete Listing Please Consult the DLC Qualified Products List (QPL).
*Made in USA available upon request.

DIMENSIONS


2 FOOT

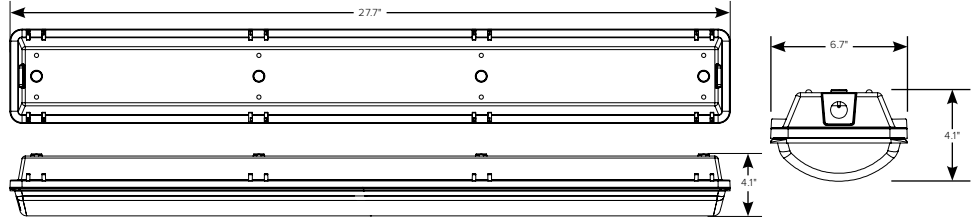


4 FOOT SLIM

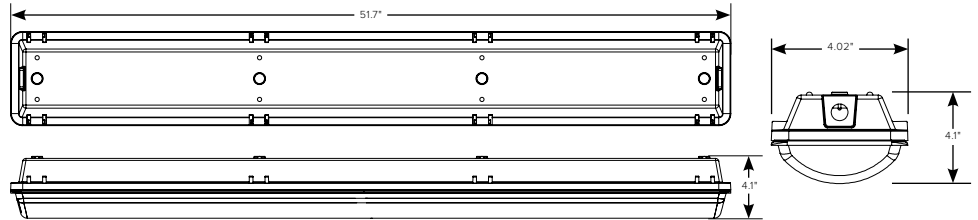


4 FOOT

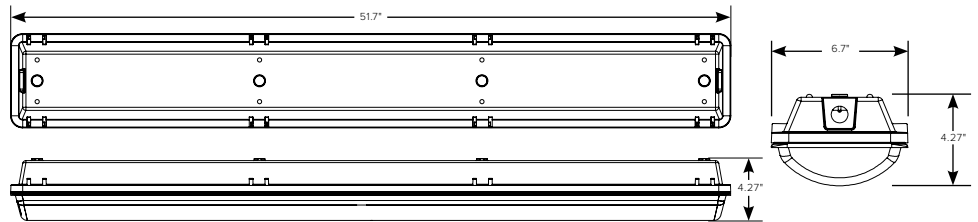

8 FOOT

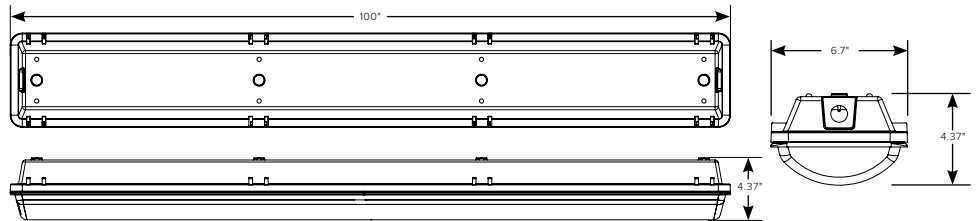

HIGH BAY

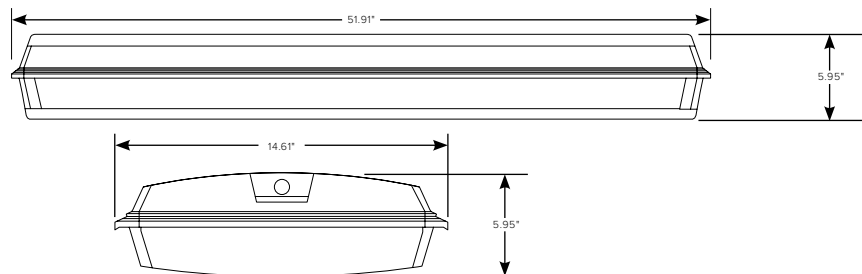

OPTIONS/ACCESSORIES

CORD SETS

ESL-CS3W-6	Cord Set, White, 3 Wire, 6 Foot
ESL-CS3W-6P	Cord Set, White, 3 Wire, 6 Foot, Standard Plug
ESL-CS3W-6TL	Cord Set, White, 3 Wire, 6 Foot, Twist Lock Plug
ESL-CS3W-12	Cord Set, White, 3 Wire, 12 Foot
ESL-CS3W-12P	Cord Set, White, 3 Wire, 12 Foot, Standard Plug
ESL-CS3W-12TL	Cord Set, White, 3 Wire, 12 Foot, Twist lock Plug



MOUNTING

ESL-VP-CM-VP4S	Direct Mount to the Ceiling for the 4' Single Fixture (2 Included)
ESL-VP-CM-VP4x	Direct Mount to the Ceiling for the 2', 4', and 8' Narrow and Wide Body Fixture (2 Included)
ESL-VP-45DM-VP4x	45° Mount for the 2', 4', and 8' Narrow and Wide Body Fixture (2 Included)
ESL-VP-PM-VP4x	Pendent Mount 3/8" Standard (2 Included)
ESL-VP-CH-VP4x	Chain Hang CT-Bail (2 Included)
ESL-VP-VH-VP4x	VaporTight High Bay V-Hook (2 Included)
ESL-VP-PM-VP4x	VaporTight High Post Mount (2 Included)
ESL-VP-CM-VP4x	VaporTight High Ceiling Mount (2 Included)

LATCHES

ESL-VPSS	Stainless Steel Latches (2'=6 latches) (4'=8 latches) (VPHB=12 latches)
----------	--

EMERGENCY

ESL-EMG-SL1-OTB-9W	Internal Emergency Backup
ESL-EMG-SL2-CLW-5W	Internal Emergency Backup

MISCELLANEOUS

ESL-480V-SD01	480 Volt Step Down Transformer
ESL-SPD-300V-10KV-1	Surge Protector; (100–300VAC)—10kA
ESL-SPD-480V-10KV-1	Surge Protector; (480 VAC) — 10kA

SENSORS & REMOTE CONTROLS

ESL-4OCC-LDD	PhotoCell/Occupancy Sensor for Standard Mounting, Dip Switch, 0–10V
ESL-3OCC	IP65 0–10V Dimming Sensor, 8'–50' Mounting
ESL-REM-100	Infrared Remote



WWW.ESLVISION.COM

888.493.5559

Headquarters
1136 S 3600 W
Salt Lake City, UT, USA

Atlanta
6371 Corley Road
Norcross, GA, USA