

### Key Features & Benefits:


- Fits most 4" J-boxes
- Finish Options - White\*
- Surface Mount
- Damp Location Rated
- Triac Dimmable
- >90 CRI
- Easy Installation
- T24 Compliant
- Optional Emergency Backup



Project: \_\_\_\_\_ Date: \_\_\_\_\_


Catalog #: \_\_\_\_\_

Notes: \_\_\_\_\_

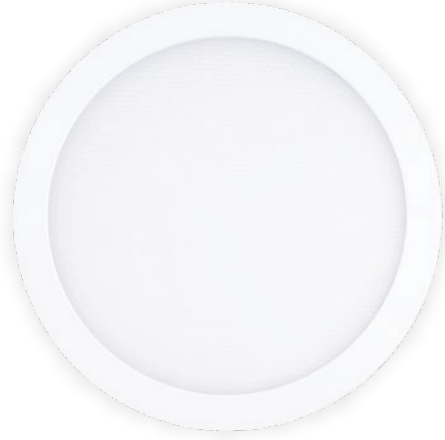

### Technical Data:


Power: 15 Watts  
 Lumen Output: Up to 900 Lumens  
 Efficacy (lm/W): Up to 60 Lumens per Watt  
 Kelvin: 3000K  
 Input Voltage: 120 VAC  
 CRI: >90  
 Rated Life (hrs): 50,000  
 Beam Angle: 100°  
 Dimensions (ØxH): 7.1" x 1"

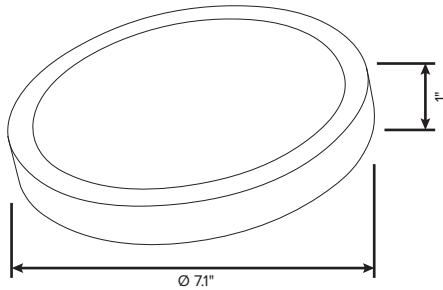

### Installation:

#### Accessories Below Included

- STEP 1: Attach mounting bracket to J-Box
- STEP 2: Click DDSK into the mounting bracket

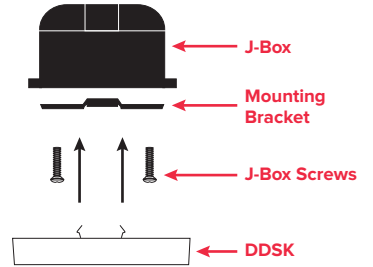

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	EQUIVALENT
ESL-DDSK-R7-15W-130-WH	15W	900	60	3000K	75W

### Ordering Guide:


Example Part Number: **ESL-DDSK-R7-15W-130-WH**

<b>ESL</b>	<b>DDSK</b>	<b>R7</b>	<b>15W</b>	<b>1</b>	<b>30</b>	<b>WH</b>	
ESL	TYPE	SIZE	WATTS	GENERATION	KELVIN	FINISH	OPTIONS
	DDSK (Decorative Disk)	R7 (7" Round)	15W (15 Watts)	1 (1st Generation)	30 (3000 Kelvin)	WH (White)	EMG* (2 Wire for Non-Switched Circuit) 3WEMG* (3 Wire for Switched Circuit)

\* Contact factory for EMG lead-times

### Wiring Diagrams:

3WEMG Wiring Diagram

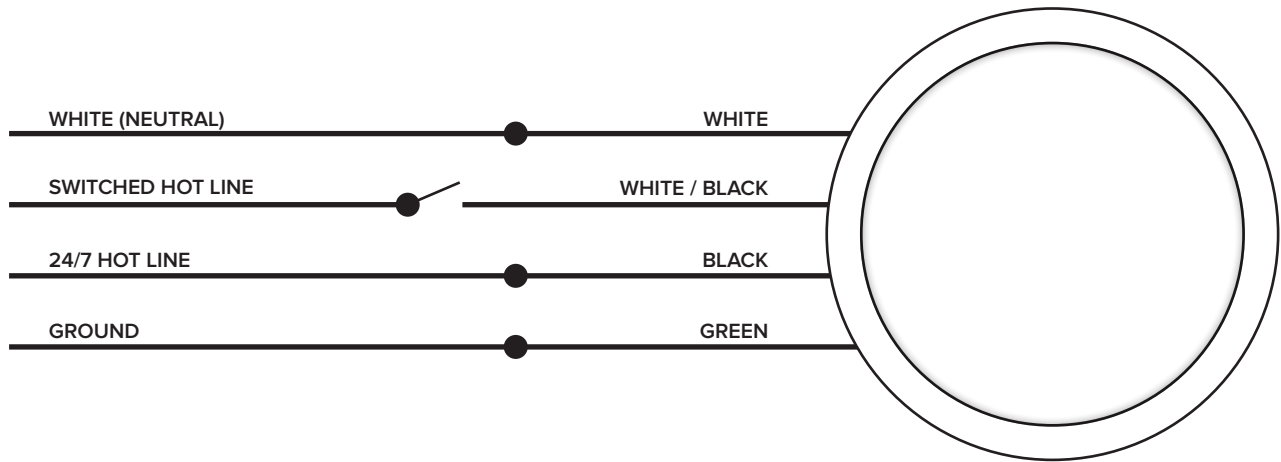

EMG Wiring Diagram (Standard)

