

Key Features & Benefits:


- Fits most 4" J-boxes
- Finish Options - White*
- Surface Mount
- Damp Location Rated
- Triac Dimmable
- >90 CRI
- Easy Installation
- T24 Compliant
- Optional Emergency Backup



Project: _____ Date: _____


Catalog #: _____

Notes: _____

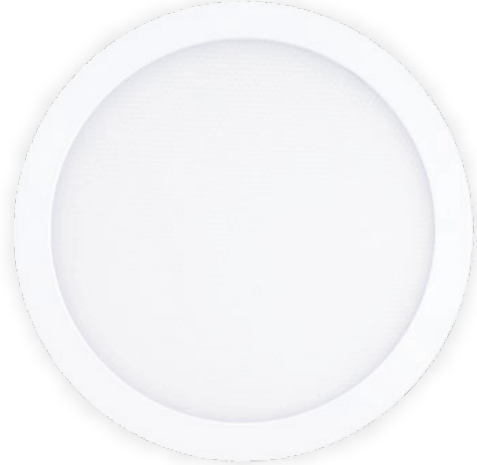

Technical Data:



Power: 20 Watts
 Lumen Output: Up to 1,200 Lumens
 Efficacy (lm/W): Up to 60 Lumens per Watt
 Kelvin: 3000K
 Input Voltage: 120 VAC
 CRI: >90
 Rated Life (hrs): 50,000
 Beam Angle: 100°
 Dimensions (ØxH): 9.05" x 1.02"

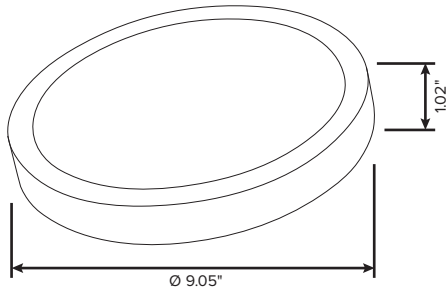

Installation:

Accessories Below Included

- STEP 1: Attach mounting bracket to J-Box
 STEP 2: Click DDSK into the mounting bracket

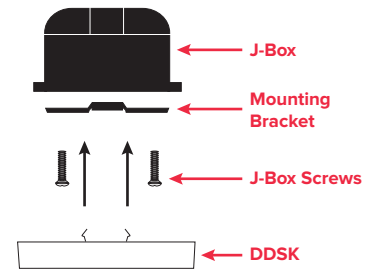

Mounting Bracket



J-Box Screws



Wire Nuts

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	EQUIVALENT
ESL-DDSK-R9-20W-130-WH	20W	1,200	60	3000K	100W

Ordering Guide:


Example Part Number: **ESL-DDSK-R9-20W-130-WH**

ESL	DDSK	R9	20W	1	30	WH	
ESL	TYPE	SIZE	WATTS	GENERATION	KELVIN	FINISH	OPTIONS
	DDSK (Decorative Disk)	R9 (9" Round)	20W (20 Watts)	1 (1st Generation)	30 (3000 Kelvin)	WH (White)	EMG* (2 Wire for Non-Switched Circuit) 3WEMG* (3 Wire for Switched Circuit)

* Contact factory for EMG lead-times

Wiring Diagrams:

3WEMG Wiring Diagram

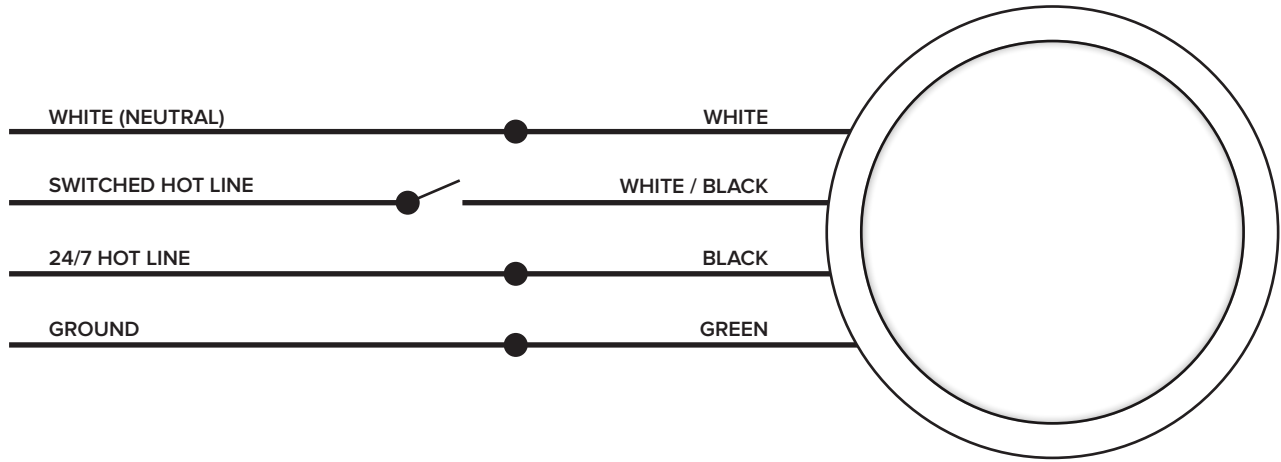

EMG Wiring Diagram (Standard)

