

Key Features & Benefits:

- Installation
 - Strong spring clips to secure housing to drywall, ceiling tiles and downlight mounting plate
- Ratings
 - Acceptable for use in IC or Non-IC applications
 - Wet location rated
 - Energy Star listed
- Construction
 - Recessed bevel with frosted lens for smooth, even and optimal light distribution
 - Cast aluminum housing and trim
- Rated life > 50,000 hrs

Project: _____ Date: _____
 Catalog #: _____
 Notes: _____



**9 LIGHTS
IN ONE**



IC RATED



KELVIN ADJUSTABLE





WATTAGE ADJUSTABLE



Technical Specifications:

- Power: 10/15/22 Watts
- Lumens: Up to 1,950 Lumens
- Input Voltage: 110-277 VAC
- Power Factor: >0.98
- CRI: 90
- Kelvin: 3000K, 4000K, 5000K
- Input Frequency: 50/60Hz
- Operating Temperature: -13°F to 114°F (-25°C to 45°C)
- Max Mounting Thickness: 5"

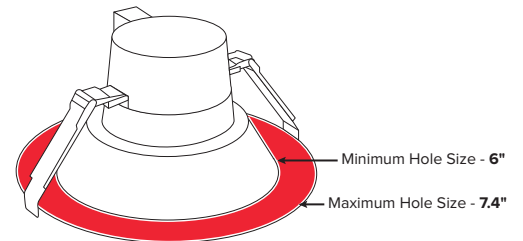

Catalog Data:

| ITEM# | WATTS | KELVIN | | | CRI | ENERGY STAR CERTIFIED |
|------------------|-------|--------|-------|-------|-----|-----------------------|
| | | 3000K | 4000K | 5000K | | |
| ESL-OPT-6-xW-1yy | 10W | 850 | 900 | 900 | 90 | ✓ |
| | 15W | 1,250 | 1,350 | 1,350 | 90 | ✓ |
| | 22W | 1,750 | 1,950 | 1,950 | 90 | ✓ |

LUMEN OUTPUT

Ordering Guide:

| | | | | | | | | | |
|------------|---|--------------------|---|----------------|---|---------------------|---|--------------------|------------------|
| ESL | - | OPT | - | 6 | - | xW | - | 1 | yy |
| ESL | | TYPE | | SIZE | | WATTS | | GENERATION | KELVIN |
| | | OPT (Optus Series) | | 6 (Round 5/6") | | xW (10/15/22 Watts) | | 1 (1st Generation) | yy (30K/40K/50K) |