

Key Features & Benefits:

- Quick Connect Technology
 - No need to worry about shunted or non-shunted tombstones
 - Extremely fast installation
 - No power through the pins
 - Power through the cord
- Interchangeable End Caps – Designed to Work With any Tombstone
 - G13 (Standard)
 - Fa8 (Single Pin)
 - R17D (HO)
- Long Life 80,000 Hours (L70)
 - 10 year warranty (12 hour run times)
 - 7 year warranty (24 hour run times)
- Universal Input 120-277V; 50/60Hz External Driver
- Glass Free
- Vibration and Impact Resistant
- No UV Emission
- Suitable for Dry and Damp Locations



Project: _____ Date: _____

Catalog #: _____

Notes: _____



Electrical Data:

Light Specifications:

Lumen output: Up to 3,570 Lumens
 Efficacy (lm/W): Up to 119 Lumens per Watt
 Kelvin: 4000K, 5000K
 Color Rendering Index (CRI): >82
 Rated Life: > 80,000 hrs

Driver Data:

Input Voltage: 120-277 VAC
 Output Power: 30W
 Input Current @ 120V: 0.25 Amps
 Input Current @ 240V: 0.125 Amps
 Input Current @ 277V: 0.108 Amps
 Total Harmonic Distortion (THD): <10%
 Operating Temperature: -4 ~ 122°F

Catalog Data:

| ITEM# | WATTS | LUMEN OUTPUT | EFFICACY (lm/W) | KELVIN |
|-------------------------|-------|--------------|-----------------|--------|
| ESL-TiHO-4-S-30W-1L-F40 | 30W | 3,540 | 118 | 4000K |
| ESL-TiHO-4-S-30W-1L-F50 | 30W | 3,570 | 119 | 5000K |

Ordering Guide:

| | | | | | | | |
|------------|--------------------|---------------|----------|----------------|--------------------------------|-------------|--------------------------------------|
| ESL | TiHO | 4 | S | 30W | 1L | F | |
| ESL | TYPE | LENGTH | CLASS | WATTS | LAMP | LENS | KELVIN |
| | TiHO (High Output) | 4 (Four Feet) | S | 30W (30 Watts) | 1L (One Lamp) 2L (Two Lamp) | F (Frosted) | 40 (4000 Kelvin) 50 (5000 Kelvin) |

Endcap Options:

| |
|---------------|
| ENDCAP |
| ENDCAP |

ESL-Ti-G13*
ESL-Ti-Fa8
ESL-Ti-HO

*Standard endcap


Alternate Ti Options:



2L Output

Dimensions:

Ti:

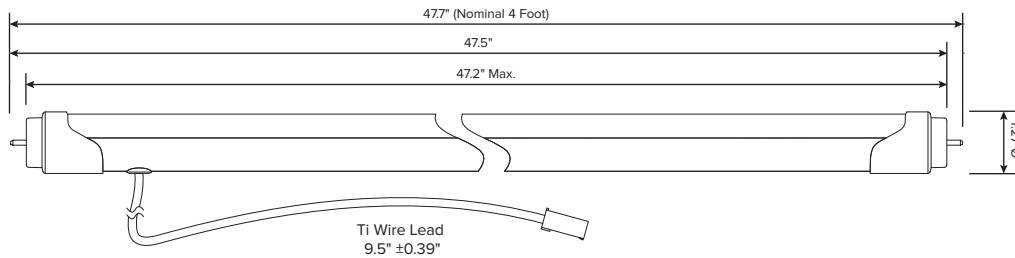

Driver:

