

Key Features & Benefits:

- Glass-Free, Vibration and Impact Resistant
- Optical Grade Polycarbonate Lens Tubes:
 - UV protected
 - Fire retardant
 - Corrosion resistant
- Zero Maintenance
- Superior Heat Management
- Die-Formed Heavy Gauge Steel
- Long Life:
 - 10 year warranty (12 hour run times)
 - 7 year warranty (24 hour run times)
- Safe - No Glass to Shatter
- 1-10v Dimmable

Project: _____

Date: _____

Catalog #: _____

Notes: _____



Light Specifications:

Lumen Output: Up to 7,320 Lumens
 Efficacy (lm/W): Up to 122 Lumens per Watt
 Kelvin: 4000K, 5000K
 Color Rendering Index (CRI): >82
 Rated Life: >80,000 Hours


Driver Data:

Input Voltage: 120-277 VAC
 Input Power: 60W
 Input Current @ 120V: 0.513 Amps
 Input Current @ 240V: 0.256 Amps
 Input Current @ 277V: 0.222 Amps
 THD: <10%
 Power Factor: >0.99
 Operating Temperature: -4 ~ 122°F

Catalog Data:

ITEM#	WATTS	LUMEN OUTPUT	EFFICACY (lm/W)	KELVIN	DLC QPL CODE
ESL-TiHO-F414-S-60W-F40	60W	7,080	118	4000K	PAUHCWFO
ESL-TiHO-F414-S-60W-F50	60W	7,320	122	5000K	P903S9BV

Ordering Guide:

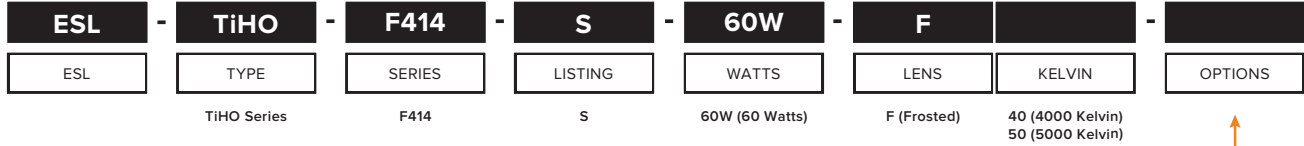

Options (Add as Suffix):

ESL-EMG-5DC-10W
 ESL-4OCC-LDD
 ESL-REM-100

Emergency Back Up, 1250 Lumens, 90 Minutes, 120-277 VAC, Factory Installed Photocell/Occupancy Sensor for Standard Mounting, Dip Switch, 0-10v Hand Held Remote to Program 2OCC-HDD, 3OCC, 4OCC-LDD and 8OCC

Dimensions:

